

DIGITALINXTM

Complete Digital Solutions for the AV Professional

User's Manual

**Digital Media Converter Package
Part #: DL-HDCAT-WP**



TABLE OF CONTENTS

| | |
|------|--|
| 1-1 | Table of Contents |
| 1-2 | Welcome and Safety Notes |
| 1-3 | Product Description and General Specifications |
| 1-4 | Environmental Reliability Specifications |
| 1-5 | Features |
| 1-6 | Installation |
| 1-7 | Mechanical Specifications |
| 1-8 | Technical Specifications |
| 1-9 | Warranty Information |
| 1-10 | Troubleshooting and Customer Service Information |

Welcome and Safety Notes

Congratulations on your purchase of a DigitaLinx™ Digital Media Converter System. This manual contains information that will assist you in the installation and operation of this product. Please inspect the contents of the package to ensure all required material is present.

Contents:

Each DigitaLinx™ Digital Media Converter package contains the following items:

- 1 each DL-HDCAT-WP Digital Media Converter Set (TX and RX unit)
- 1 each 5 VDC Power Supply (UL) and C(UL) listed Class 2 C(UL)US
- 1 each Users Manual

Safety Precautions:

- 1.) Please read all product manuals and safety notes prior to operating this or any devices.
- 2.) Retain the product manuals and safety notes for future reference.
- 3.) Unplug this unit prior to cleaning; do not use liquid cleaners or aerosol cleaners. Use a damp cloth for cleaning.
- 4.) Do not use this equipment near damp or wet locations.
- 5.) The product should only be powered by the indicated sources in the specifications. Do not use other sources of power.
- 6.) Do not use damaged power cords or plugs and do not use loose electrical outlets. Please refer repair of non-conforming electrical equipment to certified personnel.
- 7.) Do not place heavy articles or other equipment on top of this device or its associated peripherals.
- 8.) Do not use this device near flammable material, liquids, or gas.



Product Description and General Specifications

This DigitaLinX™ Digital Media Converter is an externally powered digital HDMI and DVI Media Converter system to send HDMI and DVI over standard Category Cable, unshielded or shielded. The unit uses an included 5 VDC power source. The device is compliant with DVI 1.0 and supports HDMI 1.3 signals. The device is fully compliant with HDCP protocol. This device is certified HDMI 1.3b Category 1 through an Authorized Testing Center (ATC).

This Digital Media Converter is ideal for installations where pre-wire has been done with multiple category cables or where space constraints limit installing HDMI® or DVI cables. The Category cable solution is also excellent for retrofit applications. The compact design allows the devices to be unobtrusive in the final installation. It is recommended to test an application using the customer equipment as the signal from the source device varies between manufacturers.

The system can easily accommodate DVI only inputs and outputs by using Liberty's high quality HDMI to DVI interconnects. The DVI connector is routed to the sources and display unit while the HDMI connector plugs into the DigitaLinX™ Digital Media Converter. The digital audio signal is not transmitted when using DVI connectors.

| ITEM | DESCRIPTION | |
|---------------------------|--|--|
| Model Name | DL-HDCAT-WP (TX Unit) | DL-HDCAT-WP (RX Unit) |
| Input(s) | (1) HDMI type A Receptacle | (2) 8P8C Shielded Modular Jacks (RJ45) |
| Output | (2) 8P8C Shielded Modular Jacks (RJ45) | (1) HDMI type A Receptacle |
| Supported Resolutions | 480i, 480p, 720p, 1080i, 1080p up to 60 Hz | 480i, 480p, 720p, 1080i, 1080p up to 60 Hz |
| HDCP Compatible | Yes | Yes |
| Power Consumption | N/A – Power on the RX unit | 5 VDC 1.0 Watt from supplied DC unit |
| Dimensions: | 114.5x70.5x70.4mm | 114.5x70.5x70.4mm |
| (Length x Width x Height) | (Without bracket mounted) | (Without bracket mounted) |
| Weight | ~0.14 Kg | ~0.144 Kg |

The actual transmission distance can vary depending on many factors. Liberty Wire and Cable has performed application testing and found these devices can effectively operate in excess of the distances listed. The quality of the Category cable is a prime factor in limiting distances. Use of Category 6 cable will extend distances and use of overall shielded category cables will reduce EMI issues. This is a practical application chart with actual observed distances and performance in a real application.

| Cable-----Resolution | 720p60 | 1080i30 | 1080p24 | 1080p60 |
|--------------------------|-----------------|----------------|----------------|----------------|
| Category 5e UTP | 60m (197 feet) | 60m (197 feet) | 20m (66 feet) | 20m (66 feet) |
| Category 5e F/UTP | 60m (197 feet) | 60m (197 feet) | 20m (66 feet) | 20m (66 feet) |
| Category 6 | 80m (260 feet) | 80m (260 feet) | 50m (165 feet) | 50m (165 feet) |
| LOW SKEW UTP | NOT RECOMMENDED | | | |
| Recommended UTP Distance | 40m (132 feet) | 40m (132 feet) | 20m (66 feet) | 20m (66 feet) |

User results will vary based upon the quality of the Category Cabling, the installation practices used, and the features of the sources and displays. It is recommended the Category cable be properly tested to verify Gigabit Ethernet capability. This will identify any issues caused during installation and termination.



Environmental Reliability Specifications

The DigitaLinx™ Digital Media Converter recommended environmental operating limits are a temperature range from 10°C to 40°C, non-condensing humidity levels from 10-80% and an altitude ceiling of 3,000 meters (9,840 feet).

Environmental limits for transportation are established as a temperature range of -25°C to 60°C, non-condensing humidity levels from 5-95%, and an altitude ceiling of 15,000 meters (49,200 feet)

Environmental limits for storage are established as a temperature range of -20°C to 45°C, non-condensing humidity levels from 5-95%, and an altitude ceiling of 3,000 meters (9,840 feet)



High Quality Picture –

No Loss of Resolution or introduced Digital Artifacts

Our Digital Media Converters are manufactured to deliver the highest quality picture by preserving the native resolution from the video sources and eliminating any digital artifacts (pixel loss or “sparklies”). Due to the nature of digital signals any non-active connector junctions will detrimentally affect the signal, this device provides active junctions to equalize and amplify the signal (boosting) and ensures the best signal quality to the display. The display unit (RX) contains the repeater technology.

Signal Amplification


is available to perform the signal boost to the correct specification. This is necessary because the introduction of a Digital Media Converter usually indicates that longer cable lengths are in use. This device equalizes the signal loss from a longer length cable to the original native resolution and signal power. The maximum length of an interconnect cable recommended for this device is 2 meters from the converter to either source or display. All Liberty Wire & Cable HDMI interconnects are tested to ensure 1080p resolution.

Compact Design

The Digital Media Converter devices are manufactured in a small size which allows the devices to be situated in an unobtrusive installation. The twin RJ45 receptacles are oriented 180° from the HDMI connector to facilitate a straight cable lay.

Universal Cable Mounting Bracket

The Digital Media Converter system includes (2) two universal support brackets that can be mounted on the front of the plate to support the HDMI connector and protect it from lateral, horizontal and vertical pulling. This ensures the HDMI cable remains secure in the receptacle.



Removable mounting bracket to support and hold the molded HDMI end. This will prevent breakage of the HDMI connector. User mountable with a single screw.

Installation

Ensure the two Category Cables are plugged into the appropriate RJ45 Jack. The wires should be routed RJ45-1 to RJ45-1 and RJ45-2 to RJ45-2. Ensure the modular plugs are fully seated and locked into the receptacles. Category 5e or better UTP or F/UTP (overall shielded) is recommended.

The recommended method for connection of devices to the Digital Media Converter is listed in the following steps. Please ensure this order is followed to enjoy the full function of the device.

- 1.) Ensure the digital video/audio source and display is turned off.
- 2.) Connect the digital video/audio source to the input port of the DigitalLinx™ Digital Media Converter.
- 3.) Connect the digital display to the output port of the DigitalLinx™ Digital Media Converter.
- 4.) Power up the DigitalLinx™ Digital Media Converter.
- 5.) Power up the digital display.
- 6.) Power up the digital video/audio sources
- 7.) HDCP handshaking operation can take up to 20 seconds. Green LED's will illuminate when complete.
- 8.) Check the LED power indicator and status indicators on the DigitalLinx™ Digital Media Converter. The signal indicators should be green when the devices are correctly attached. See troubleshooting on Page 1-10 if the LED's are not green.


Note: The unit can function without the DC power supply however HDMI.org does not recognize or authorize devices using source device voltage (Pin 18 on your video source) as part of their specification. If using this item for DVI or Video only applications the DC power source can be removed. It is recommended to use the DC power source for full operation of the device.

Mechanical Specifications


Dimensions:

DL-HDCAT-WP: HxWxD 114.50mm x70.5mm x70.4mm


(Unit drawing is showing the cable support bracket mounted)

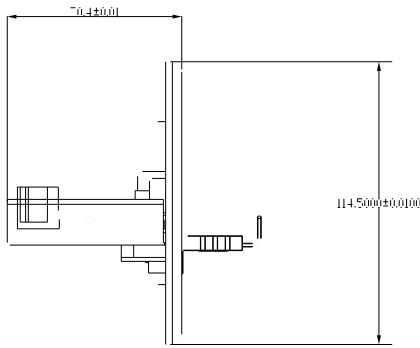



Side View



Front View



Top View

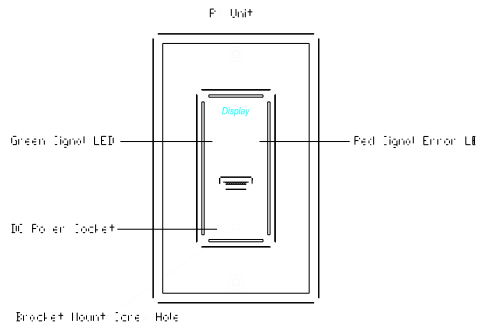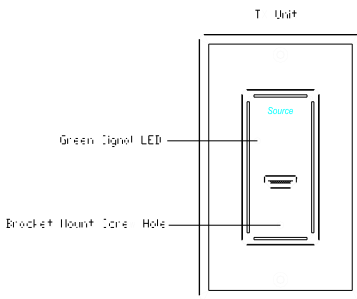

Indicator and front plate legend

- Green LED: Signal Status Good
- Red LED: Signal Status Error
- HDMI IN: HDMI from digital media source
- HDMI OUT: HDMI to digital video display

Technical Specifications

Frequency Bandwidth: 1.65 Gbps

Equalizer Performance: 40 dB at 1.65 Gbps

Supporting Graphic Resolution: Up to display 1080p60 (2200 x 1125@60Hz)

Inputs: HDMI Type A receptacle 1 port, 8P8C
Modular Jack 2 ports

Outputs: HDMI Type A receptacle 1 port, 8P8C
Modular Jack 2 ports

Power Supply: External power from DC Adapter

HDCP (High-bandwidth Digital Content Protection) Compliant

| Connector Pin Assignment for HDMI Type A Receptacle | |
|---|--------------------|
| Pin # | Description |
| 1 | TMDS Data 2 + |
| 2 | TMDS Data 2 shield |
| 3 | TMDS Data 2 - |
| 4 | TMDS Data 1 + |
| 5 | TMDS Data 1 shield |
| 6 | TMDS Data 1 - |
| 7 | TMDS Data 0 + |
| 8 | TMDS Data 0 shield |
| 9 | TMDS Data 0 - |
| 10 | TMDS Clock + |
| 11 | TMDS Clock shield |
| 12 | TMDS Clock - |
| 13 | CEC |
| 14 | RESERVED |
| 15 | SCL |
| 16 | DDC DATA |
| 17 | DDC/CEC GROUND |
| 18 | +5VDC POWER |
| 19 | HOT PLUG DETECT |

Warranty Information

1 (One) Year Warranty

Liberty Wire & Cable warrants this DigitalLinx™ Digital Media Converter to be free from defects in workmanship and materials, under normal use and service, for a period of one (1) year from the date of purchase from Liberty Wire & Cable or its authorized resellers.

If a product does not work as warranted during the applicable warranty period, Liberty Wire & Cable shall, at its option and expense, repair the defective product or part, deliver to the customer an equivalent product or part to replace the defective item, or refund the customer the purchase price paid for the defective product.

All products that are replaced will become the property of Liberty Wire & Cable. Replacement products may be new or reconditioned.

Any replaced or repaired product or part has a ninety (90) day warranty or the remainder of the initial warranty period, whichever is longer.

Liberty Wire & Cable shall not be responsible for any software, firmware, information, or memory data loss of customer contained in, stored on, or integrated with any products returned to Liberty Wire & Cable for repair under warranty or not.

Warranty Limitation and Exclusion

Liberty Wire & Cable shall have no further obligation under the foregoing limited warranty if the product has been damaged due to abuse, misuse, neglect, accident, unusual physical or electrical stress, unauthorized modifications, tampering, alterations, or service other than by Liberty Wire & Cable or its authorized agents, causes other than from ordinary use of failure to properly use the product in the application for which said product is intended.



Troubleshooting

The DigitalLinx™ Digital Media Converter is designed for years of trouble free service, please reference the troubleshooting chart below if experiencing issues with the device.

| Symptom | | Solution | |
|-----------------|----------------------------|--------------------------------|---|
| TX Unit | RX unit | Status | Solution |
| Green Light on | Green light on | Video OK, no Audio | Shorten the cable length |
| Green Light on | Green & Red Light on | Display not connected | Check display connection |
| Green Light on | Green & Red Light Flashing | Display power off | Power up the display |
| | | Cable is too long | Shorten the cable length |
| Green Light off | Green & Red Light on | No source signal | Check and reconnect the source |
| | | Display and Source reversed | Ensure TX is at the source and RX is at the display |
| Green Light off | Green & Red Light off | No power | Connect the DC power unit |
| | | No source or display connected | Connect the source and display |

Customer Service

If you have issues, questions, or require assistance with the use of this device please contact Liberty Wire and Cable with any of the following contact points:

Liberty Wire and Cable
 11675 Ridgeline Drive
 Colorado Springs, CO 80921

Phone: (800) 530-8998 and ask for technical assistance.

Email: Sales@libertycable.com and indicate in Subject Line "Technical Assistance"



© 2008 Liberty Wire & Cable. All Rights Reserved.



Liberty Wire & Cable
11675 Ridgeline Drive
Colorado Springs, CO 80921

800-530-8998

www.libertycable.com