

# AMERICAN AUDIO



## **ELS GO 15BT**

**Professional Powered Two-Way  
Loudspeaker**

CUSTOMER SUPPORT.....	2
UNPACKING.....	2
HANDLING PRECAUTIONS.....	3
FEATURES.....	5
PRODUCT REGISTRATION.....	5
REAR PANEL CONTROLS.....	6
REMOTE CONTROL.....	9
BATTERY CHARGING.....	9
MOUNTING.....	11
AVAILABLE ACCESSORIES.....	11
WARRANTY.....	12
SPECIFICATIONS.....	13

**Introduction:** Congratulations and thank you for purchasing the American Audio® ELS GO 15BT professional sound reinforcement loudspeaker. This loudspeaker is a representation of American Audio's continuing commitment to produce the best and highest quality audio products possible at an affordable price. The ELS GO 15BT is a 15-inch battery powered active speaker. Its extremely high efficiency design, low power consumption, and plenty of output power is ideal for small and mid-size events. The ELS GO 15BT is multifunctional. Users can also utilize the Microphone Inputs and built-in Bluetooth and MP3 player with USB and SD Card inputs. The speaker includes a poll mount slot and rubber feet on the bottom of the unit for portable applications and also includes rigging points on the top, bottom, and rear of the unit for permanent and flight installations. Please read and understand this manual completely before attempting to operate your new speaker system. This booklet contains important information concerning the proper and safe operation of your new speaker.

**Customer Support:** American Audio® provides a toll free customer support line, to provide set up help and answer any question should you encounter problems during your initial set up or operation. You may also visit us on the web at [www.americandj.com](http://www.americandj.com) for any comments or suggestions. Service Hours are Monday through Friday 8:00 a.m. to 4:30 p.m. Pacific Standard Time.

Voice: (800) 322-6337  
 Fax: (323) 582-2610  
 E-mail: [support@americandj.com](mailto:support@americandj.com)

**Caution!** There are no user serviceable parts inside this speaker. Do not attempt any repairs, without being instructed to do so by an authorized American Audio technician. Doing so will void your manufacturer's warranty. In the unlikely event your speaker may require service, please contact American Audio®.

Every ELS GO 15BT has been thoroughly tested and has been shipped in perfect operating condition. Carefully check the shipping carton for damage that may have occurred during shipping. If the carton appears to be damaged carefully inspect your units for any damage and be sure all accessories necessary to operate the system have arrived intact. In the event damage has been found or parts are missing, please contact our toll free customer support number for further instructions. Please do not return the speaker to your dealer without first contacting customer support.

ELECTRICAL PRECAUTIONS



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE THE COVER (OR BACK). THERE ARE NO USER SERVICEABLE PARTS INSIDE. REFER SERVICE TO YOUR AUTHORIZED AMERICAN AUDIO® SERVICE TECHNICIAN.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

IMPORTANT SAFETY INSTRUCTIONS

**READ INSTRUCTIONS** — All the safety and operating instructions should be read before the product is operated.

**RETAIN INSTRUCTIONS** — The safety and operating instructions should be retained for future reference.

**HEED WARNINGS** — All warnings on the product and in the operating instructions should be adhered to.

**FOLLOW INSTRUCTIONS** — All operating and use instructions should be followed.

**CLEANING** — The product should be cleaned only with a polishing cloth or a soft dry cloth. Never clean with furniture wax, benzene, insecticides or other volatile liquids since they may corrode the cabinet.

**ATTACHMENTS** — Do not use attachments not recommended by the product manufacturer as they may cause hazards.

**WATER AND MOISTURE** — Do not use this product near water — for example, near a bathtub, wash bowl, kitchen sink, or laundry tub; in a wet basement; or near a swimming pool; and the like.

**ACCESSORIES** — Do not place this product on an unstable cart, stand, tripod, bracket, or table. The product may fall, causing serious injury to a child or adult, and serious damage to the product. Use only with a cart, stand, tripod, bracket, or table recommended by the manufacturer, or sold with the product. Any mounting of the product should follow the manufacturer's instructions, and should use a mounting accessory recommended by the manufacturer.

**CART** — A product and cart combination should be moved with care. Quick stops, excessive force, and uneven surfaces may cause the product and cart combination to overturn.



**VENTILATION** — Slots and openings in the cabinet are provided for ventilation and to ensure reliable operation of the product and to protect it from overheating, and these openings must not be blocked or covered. The openings should never be blocked by placing the product on a bed, sofa, rug, or other similar surface. This product should not be placed in a built-in installation such as a bookcase or rack unless proper ventilation is provided or the manufacturer's instructions have been adhered to.

**POWER SOURCES** — This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply to your home, consult your product dealer or local power company.

**LOCATION** — The appliance should be installed in a stable location.

**NONUSE PERIODS** — The power cord of the appliance should be unplugged from the outlet when left unused for a long period of time.

**GROUNDING OR POLARIZATION**

- If this product is equipped with a polarized alternating current line plug (a plug having one blade wider than the other), it will fit into the outlet only one way. This is a safety feature. If you are unable to insert the plug fully into the outlet, try reversing the plug. If the plug should still fail to fit, contact your electrician to replace your obsolete outlet. Do not defeat the safety purpose of the polarized plug.
- If this product is equipped with a three-wire grounding type plug, a plug having a third (grounding) pin, it will only fit into a grounding type power outlet. This is a safety feature. If you are unable to insert the plug into the outlet, contact your electrician to replace your obsolete outlet. Do not defeat the safety purpose of the grounding type plug.

**POWER-CORD PROTECTION** - Power-supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to cords at plugs, convenience receptacles, and the point where they exit from the product.

**OUTDOOR ANTENNA GROUNDING** — If an outside antenna or cable system is connected to the product, be sure the antenna or cable system is grounded so as to provide some protection against voltage surges and built-up static charges. Article 810 of the National Electrical Code, ANSI/NFPA 70, provides information with regard to proper grounding of the mast and supporting structure, grounding of the lead-in wire to an antenna discharge unit, size of grounding conductors, location of antenna-discharge unit, connection to grounding electrodes, and requirements for the grounding electrode. See Figure A.

**LIGHTNING** — For added protection for this product during a lightning storm, or when it is left unattended and unused for long periods of time, unplug it from the wall outlet and disconnect the antenna or cable system. This will prevent damage to the product due to lightning and power-line surges.

**POWER LINES** — An outside antenna system should not be located in the vicinity of overhead power lines or other electric light or power circuits, or where it can fall into such power lines or circuits. When installing an outside antenna system, extreme care should be taken to keep from touching such power lines or circuits as contact with them might be fatal.

**OVERLOADING** — Do not overload wall outlets, extension cords, or integral convenience receptacles as this can result in a risk of fire or electric shock.

**OBJECT AND LIQUID ENTRY** - Never push objects of any kind into this product through openings as they may touch dangerous voltage points or short-out parts that could result in a fire or electric shock. Never spill liquid of any kind on the product.

**SERVICING** — Do not attempt to service this product yourself as opening or removing covers may expose you to dangerous voltage or other hazards. Refer all servicing to qualified service personnel.

**DAMAGE REQUIRING SERVICE** - Unplug this product from the wall outlet and refer servicing to qualified service personnel under the following conditions:

- When the power-supply cord or plug is damaged.
- If liquid has been spilled, or objects have fallen into the product.
- If the product has been exposed to rain or water.
- If the product does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operating instructions as an improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the product to its normal operation.
- If the product has been dropped or damaged in any way.
- When the product exhibits a distinct change in performance — this indicates a need for service.

**REPLACEMENT PARTS** -- When replacement parts are required, be sure the service technician has used replacement parts specified by the manufacturer or have the same characteristics as the original part. Unauthorized substitutions may result in fire, electric shock, or other hazards.

**SAFETY CHECK** - Upon completion of any service or repairs to this product, ask the service technician to perform safety checks to determine that the product is in proper operating condition.

**WALL OR CEILING MOUNTING** — The product should not be mounted to a wall or ceiling.

**HEAT** — The product should be situated away from heat sources such as radiators, heat registers, stoves, or other products (including amplifiers) that produce heat.

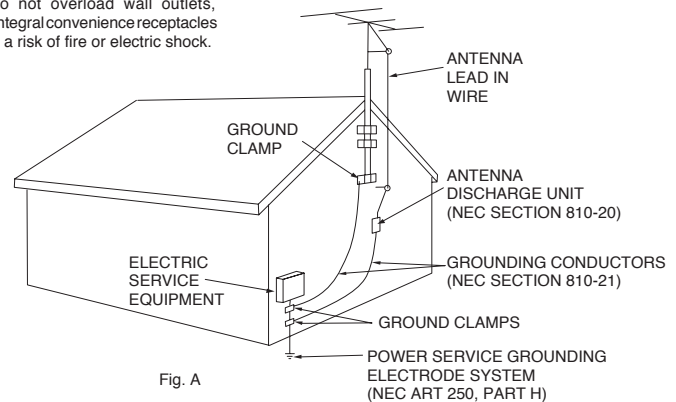


Fig. A

NEC — NATIONAL ELECTRICAL CODE

ELS GO 15BT loudspeaker can easily reproduce sound pressure levels (SPL) sufficient enough to cause sever and permanent hearing damage. A great degree of care should be taken to protect your ears to prolong exposure to SPL in excess of 85dB.

- For adult use only - Keep out of the reach of children.
- Be sure all power is turned off before making speaker connections
- When using the speaker make sure the grille is always attached.
- Always use a power cord that meets the manufactures exact power specifications
- Disconnect from main power before making any type of connection
- To reduce the risk of electrical shock or fire, do not expose this unit rain or moisture
- This speaker is intended for indoor use only, use of this product outdoors voids all warranties.
- Always mount this speaker in safe and stable matter.
- Power Cord Protection - Power supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to cords at plugs, convenience receptacles, and the point where they exit from the speaker.
- Heat -The speaker should be situated away from heat sources such as radiators, heat registers, stoves, or other mixers (including amplifiers) that produce heat
- Be sure to save the packing carton in the event the unit needs to be returned for service
- Read all documentation before attempting to operate your new mixer. Please save all your documentation for future reference
- Do not spill water or other liquids in to or on to your speaker
- Be sure that the local power outlet matches that of the required voltage for your speaker.
- Do not attempt to operate this speaker if the power cord has been frayed or broken. Please route your power cord out of the way of foot traffic
- Always have the gain controls set to their lowest level during initial power-up to prevent speaker damage
- Servicing - The user should not attempt to service the speaker beyond that described in this manual. All other servicing should be referred to qualified service personnel. The speaker should only be serviced by qualified personal when;
  - A. Objects have fallen, or liquid has been spilled into the speaker
  - B. The speaker has been exposed to rain or water
  - C. The speaker does not appear to operate normally or exhibits a change in performance
  - D. The terminal/cross-over plate has been damaged

## ELS GO 15BT

## Main Features

### ELS GO 15BT Speaker System:

- XLR & TRS Mic Inputs
- XLR & RCA Line Inputs
- XLR & TRS Line Outputs
- Bluetooth Connectivity
- SD Card & USB Inputs
- Treble & Bass EQ +/-12dB
- Active Crossover
- Built-In Pole Mount Socket
- Built-in Heavy Duty Carrying Handles
- Attached heavy Duty Rubber Feet
- Durable Wheels

## ELS GO 15BT

## File Formats

The chart located to the right, displays the proper file extensions that can be used with USB/USB Stick drives.

MP3	MPEG 1 Layer 1 MPEG 1 Layer 2 MPEG 1 Layer 3 MPEG 2 Layer 2 MPEG 2 Layer 3 MPEG 2.5 Layer 3
WMA	Windows Media Audio 1 Windows Media Audio 2 Windows Media Audio 7 Windows Media Audio 8 Windows Media Audio 9
MPEG 1	32Khz , 44.1Khz , 48Khz
MPEG 2	16Khz , 22.05Khz , 24Khz
MPEG 2.5	8Khz , 11.025Khz , 12Khz
WMA	8Khz ~ 48Khz
MPEG 1 Layer 1	32 Kbps ~ 448 Kbps
MPEG 1 Layer 2	32 Kbps ~ 384 Kbps
MPEG 1 Layer 3	32 Kbps ~ 320 Kbps
MPEG 2 Layer 2	8 Kbps ~ 160 Kbps
MPEG 2 Layer 3	8 Kbps ~ 160 Kbps
MPEG 2.5 Layer 3	8 Kbps ~ 160 Kbps
WMA	8 Kbps ~ 320 Kbps

## ELS GO 15BT

## Registration

The ELS GO 15BT carry a one year (365 days) limited warranty. Please fill out the enclosed warranty card to validate your purchase. All returned service items whether under warranty or not, must be freight pre-paid and accompany a return authorization (R.A.) number. The R.A. number must be clearly written on the outside of the return package. A brief description of the problem as well as the R.A. number must also be written down on a piece of paper and included in the shipping container. If the unit is under warranty, you must provide a copy of your proof of purchase invoice. You may obtain a R.A. number by contacting customer support at (800) 322-6337. All packages returned to the service department not displaying a R.A. number on the outside of the shipping package will be returned to the shipper unopened.

*The serial and model number for this unit is located on the rear panel Please write down the numbers here and retain them for future reference.*


Model No. \_\_\_\_\_

Date Purchased \_\_\_\_\_

Serial No. \_\_\_\_\_

Dealer Name \_\_\_\_\_

Rear of ELS GO 15BT

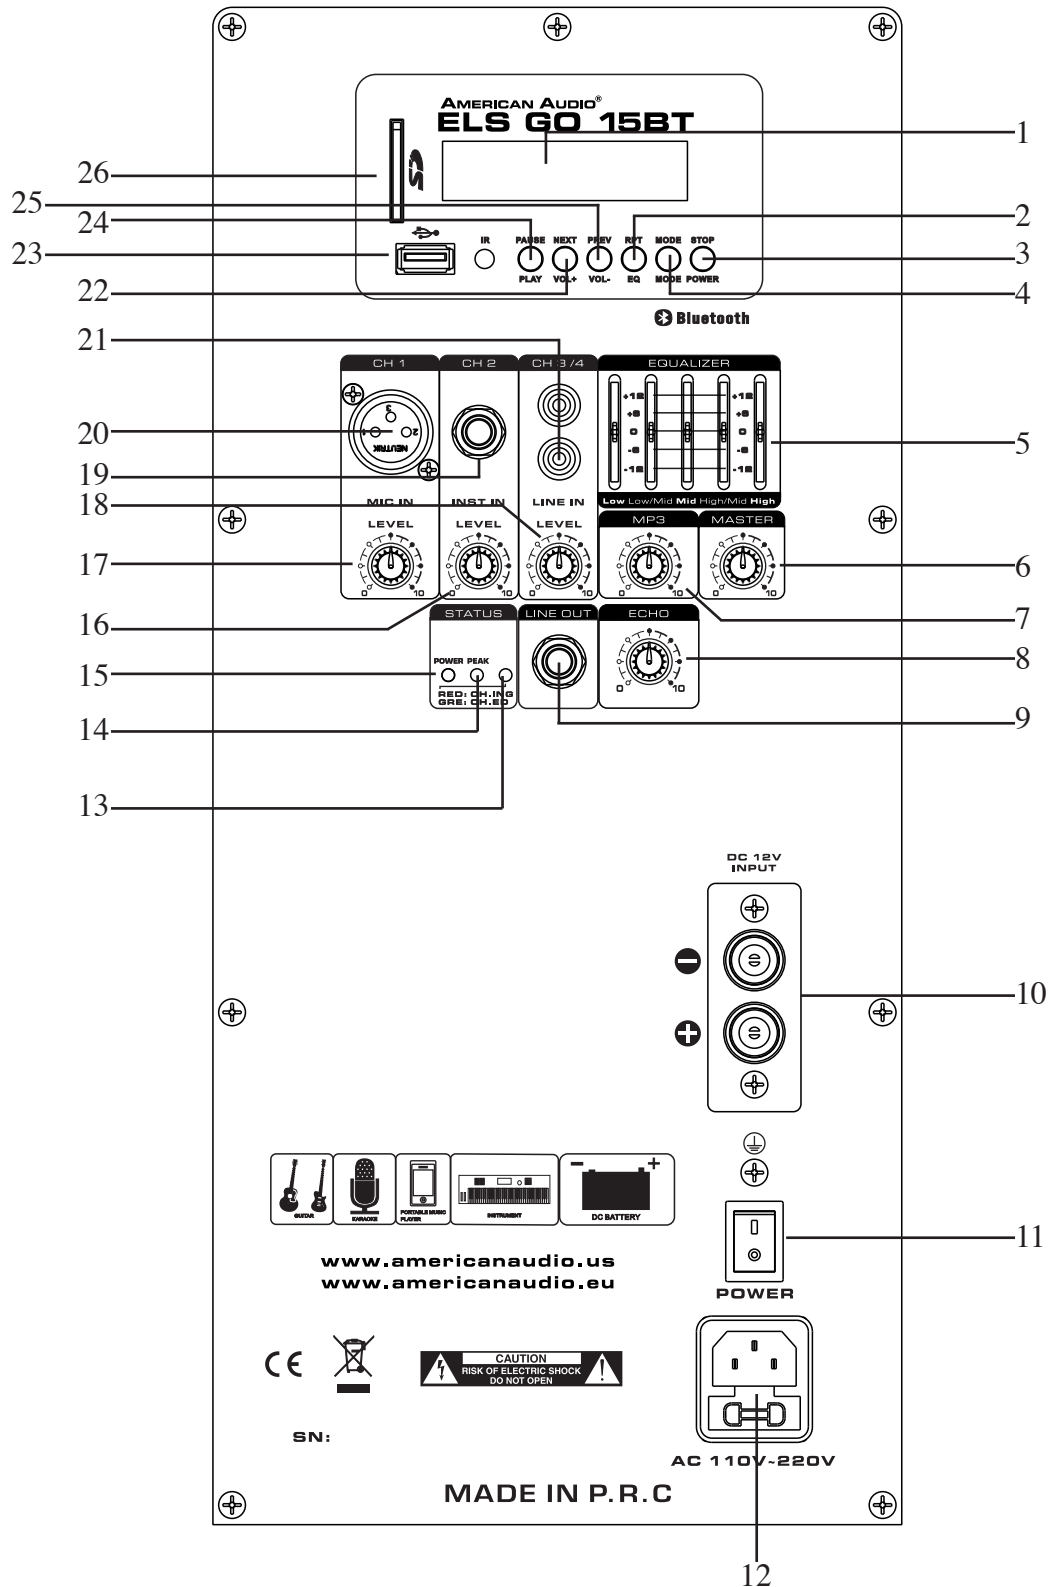

**Rear Panel:**

1. **LCD** - This screen will display all relevant information about the functions being selected or the Mp3 file being played.
2. **REPEAT/EQ BUTTON** - Press this button once to activate repeat, which will repeat the currently playing song until stop is pressed. Press and hold this button to activate EQ mode, which lets you select among the different types equalization that can be applied to a track.
3. **STOP/POWER BUTTON** - Press this button once to stop the Mp3 player. Press and hold this button to the Mp3 player on/off.
4. **MODE (USB/SD/BLUETOOTH) BUTTON** - Press this button to select the USB drive, SD drive, or Bluetooth. Press and hold this button to select the SD drive.
5. **EQ** - This sliders are used to adjust the amount treble, bass, and mids applied to the output signal. The maximum amount of gain is +12dB and the maximum amount of decrease is -12dB.
6. **MASTER VOLUME** - This knob is used to regulate the output volume. Turning the knob in a clockwise direction will increase the volume level.
7. **BLUETOOTH VOLUME CONTROL** - This knob is used to regulate Bluetooth output volume. Turning the knob in a clockwise direction will increase the volume level.
8. **ECHO LEVEL** - This knob is used to regulate the Echo output on the Mic Channel.
9. **1/4" OUTPUT** - This output jack is used to link to another speaker.
10. **DC BATTERY BINDING POST CONNECTIONS** – These inputs are used to connect to a compatible battery source, such as a car battery.
11. **MAIN POWER SWITCH** – This is the main power ON/OFF button. Before main power is applied, be sure you have made all connections to the speaker. Remember to avoid damaging pops to the speakers, the mixer is turned on first and turned off last.
12. **MAIN POWER INLET & FUSE HOLDER** – This connector is used to supply main power to the unit via the included detachable power cord. The power connection uses an I.E.C. type connector, use only the supplied polarized AC power cord. Use only a power cord that matches this type of connection. Be sure to only connect this unit to a power outlet that matches the printed power label on the unit. Never use a power when the ground prong has been removed or broken off. The ground prong is used to reduce the risk of electrical shock in case of an electrical short. This cord is designed to fit in one direction only. Do not attempt to force a cord if it does not fit, be sure the cord is being inserted properly.  
  
**FUSE HOLDER** – This housing stores the 1.6 amp GMA protective fuse. Always replace with the exact same type fuse, unless otherwise instructed, by an authorized American Audio® service technician. Replacing with any other type of fuse than that of the recommended fuse will void your unit warranty.
13. **POWER LED** - This LED indicates that the speaker is on.
14. **PEAK INDICATOR** - If this LED is lit it means that your signal is clipping. To stop the signal from clipping lower the volume to the point where the LED is blinking along with the bass beat.
15. **CHARGING INDICATOR** - When this LED is glowing red, the battery is currently charging. When the LED is glowing green, the battery has reached full charge.


- 16. INSTRUMENT INPUT VOLUME** - This knob is used to regulate the volume of the source connected to the instrument input (18). Turning the knob in a clockwise direction will increase the volume level.
- 17. MIC LEVEL** - This knob is used to regulate the microphone output volume. Turning the knob in a clockwise direction will increase the volume level.
- 18. LINE LEVEL INPUT VOLUME** - This knob is used to regulate the output signal of the line level source connected to the Line Level Input Jack (13).
- 19. 1/4" INSTRUMENT INPUT** - This input jack is for instruments such as guitars.
- 20. MIC XLR/1/4" INPUT** - This jack will accept a XLR or 1/4" plug. The volume output level for this microphone will be controlled by the MIC Volume knob (9).
- 21. BALANCED RCA LINE INPUT** - This connection is designed to accept a balanced line input signal from a mixer or other line level device with a balanced output jack. Use a balanced cable when the signal cable length exceeds 15 feet, this will reduce excessive signal loss. Be sure to connect only line level input devices such as mixers and tape machines to this jack.
- 22. NEXT/VOL + BUTTON** - Press this button once to go to the next song. Press and hold this button to increase the volume of the Mp3 Player.
- 23. USB INPUT** - Plug in any USB memory stick with Mp3 files to be played.
- 24. PAUSE/PLAY BUTTON** - Press this button once to play your chosen song, press this button again to momentarily interrupt playing. Press and hold this button to pause the playing song.
- 25. PREVIOUS/VOL - BUTTON** - Press this button once to go to the previous song. Press and hold this button to decrease the volume of the Mp3 Player.
- 26. SD INPUT** - This slot is used to insert a SD, non-volatile memory card with Mp3 files to be read.

**Battery Charging:** To recharge the battery, plug the supplied power supply into the input on the rear of the unit and plug the other end into a matching power supply. The charging LED indicator will glow red when the speaker battery is charging. When the battery reaches full charge the LED indicator will glow green. It takes about 8 hours to reach full charge.




This remote features all of the selectable functions, so that you can easily operate your speaker at a distance of up to 3 meters from your audio installation.

- 1. POWER**
- 2. USB/SD/BLUETOOTH MODE**
- 3. FORWARD SCAN**
- 4. VOLUME +**
- 5. NEXT**
- 6. PLAY/PAUSE BUTTON**
- 7. VOLUME -**
- 8. EQ SELECT**
- 9. TRACK NUMBERS**
- 10. RANDOM**
- 11. PREVIOUS**
- 12. REVERSE SCAN**

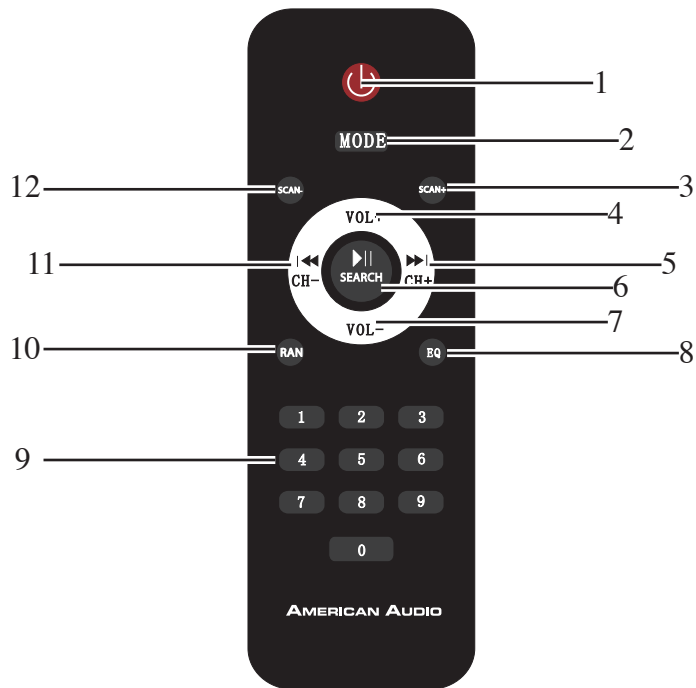

**Typical ELS GO 15BT Output Set-Up**

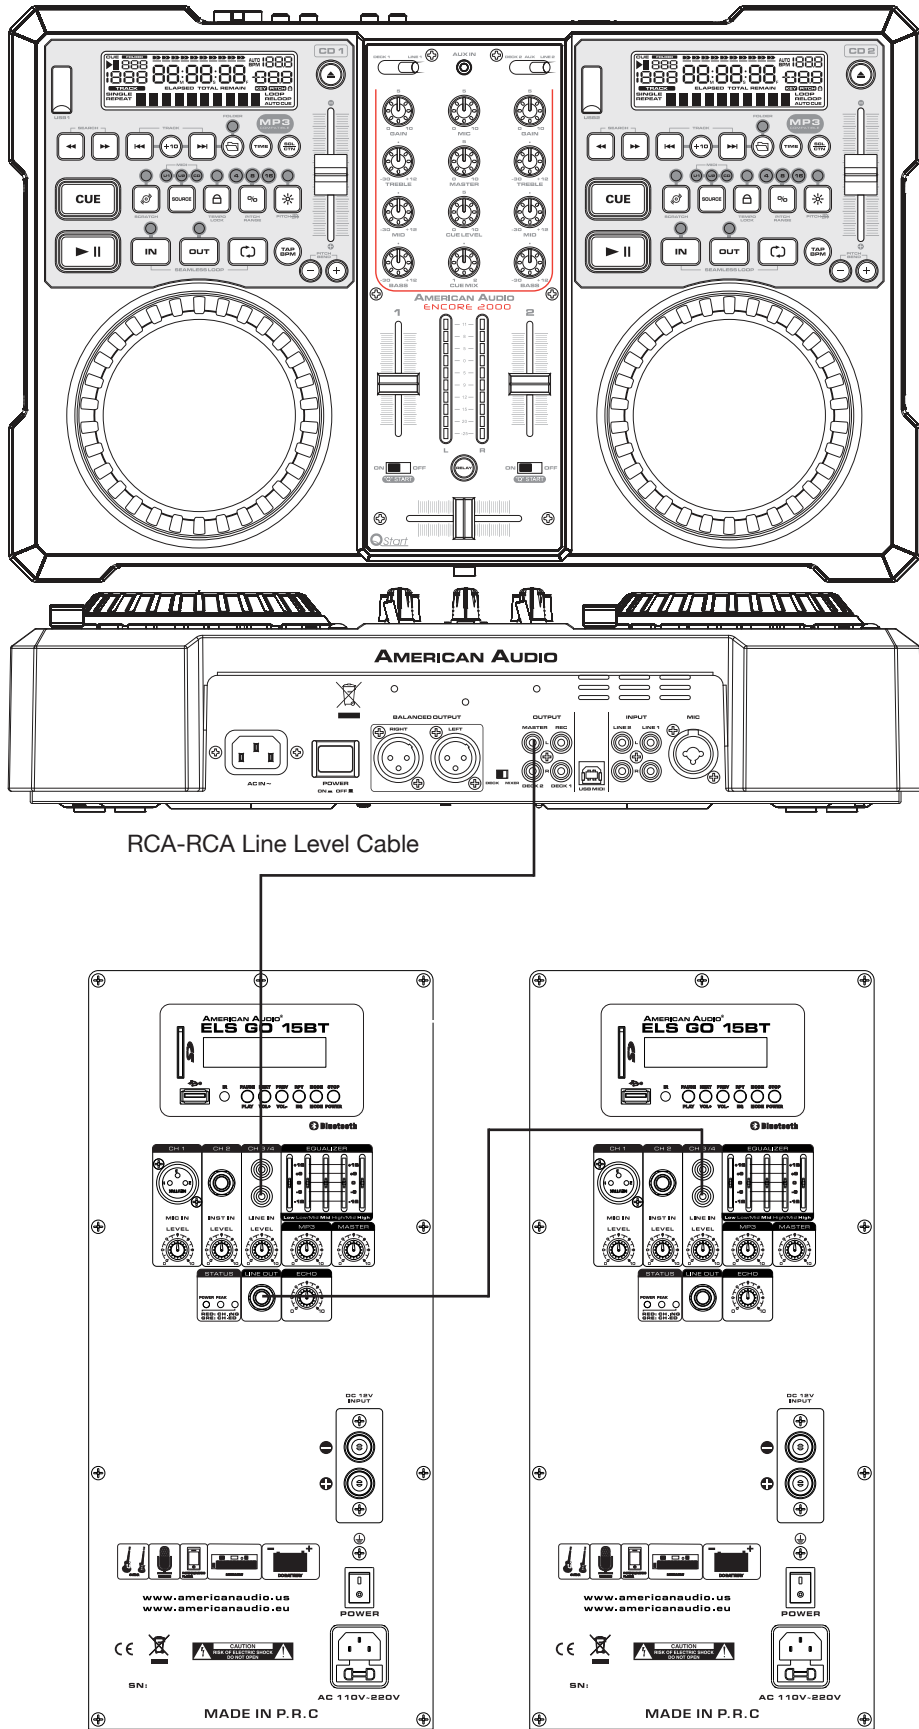



**Pole Mounting** – The ELS GO 15BT also include a pole mount option. The pole mount socket located on the bottom of the speaker may be used to secure the speaker to a speaker tri-pod, such as the American Audio® SPS-1B as illustrated on the left. Always be sure to follow the guidelines listed below when pole mounting your speaker;

- Always be sure the stand is designed to support the weight of the speaker
- In outdoor situations that are prone to windy conditions and strong wind gust, be sure to use sandbags as additional tri-pod support, this will greatly reduce the risk of tipping
- Do not stack speakers on top of each other when mounting on a tri-pod. Only one speaker should be mounted to a tri-pod at one time.
- Always position the tri-pod legs away from foot traffic
- Extend the tri-pod legs to their fully extended position to avoid accidental tipping
- Observe and follow all safety guidelines and regulations specified by the tri-pod's manufacturer
- Be sure the tri-pod is situated on a flat, level, and stable surface
- Always tighten all tri-pod locks.



**SPS-1B - Speaker Stands** - American Audio® carries the SPS-1B speaker stand, which can be used to raise the speakers during use. The SPS-1B is a sturdy aluminum tri-pod and includes a mounting socket bracket for added security. The SPS-1B can raise the speaker to a maximum height of six feet and has a maximum weight capacity of 80 pounds. SPS-1B; weight = 6lbs, pipe diameter - 1 3/8"

**1-YEAR LIMITED WARRANTY**

- A. American Audio® hereby warrants, to the original purchaser, American Audio® products to be free of manufacturing defects in material and workmanship for a period of 1 Year (365 days) from the date of purchase. This warranty shall be valid only if the product is purchased within the United States of America, including possessions and territories. It is the owner's responsibility to establish the date and place of purchase by acceptable evidence, at the time service is sought.
- B. For warranty service, send the product only to the American Audio® factory. All shipping charges must be pre-paid. If the requested repairs or service (including parts replacement) are within the terms of this warranty, American Audio® will pay return shipping charges only to a designated point within the United States. If the entire instrument is sent, it must be shipped in its original package. No accessories should be shipped with the product. If any accessories are shipped with the product, American Audio® shall have no liability whatsoever for loss of or damage to any such accessories, nor for the safe return thereof.
- C. This warranty is void if the serial number has been altered or removed; if the product is modified in any manner which American Audio® concludes, after inspection, affects the reliability of the product; if the product has been repaired or serviced by anyone other than the American Audio® factory unless prior written authorization was issued to purchaser by American Audio®; if the product is damaged because not properly maintained as set forth in the instruction manual.
- D. This is not a service contract, and this warranty does not include maintenance, cleaning or periodic check-up. During the period specified above, American Audio® will replace defective parts at its expense, and will absorb all expenses for warranty service and repair labor by reason of defects in material or workmanship. The sole responsibility of American Audio® under this warranty shall be limited to the repair of the product, or replacement thereof, including parts, at the sole discretion of American Audio®. All products covered by this warranty were manufactured after January 1, 1990, and bear identifying marks to that effect.
- E. American Audio® reserves the right to make changes in design and/or improvements upon its products without any obligation to include these changes in any products theretofore manufactured.
- F. No warranty, whether expressed or implied, is given or made with respect to any accessory supplied with products described above. Except to the extent prohibited by applicable law, all implied warranties made by American Audio® in connection with this product, including warranties of merchantability or fitness, are limited in duration to the warranty period set forth above. And no warranties, whether expressed or implied, including warranties of merchantability or fitness, shall apply to this product after said period has expired. The consumer's and or Dealer's sole remedy shall be such repair or replacement as is expressly provided above; and under no circumstances shall American Audio® be liable for any loss or damage, direct or consequential, arising out of the use of, or inability to use, this product.
- G. This warranty is the only written warranty applicable to American Audio® Products and supercedes all prior warranties and written descriptions of warranty terms and conditions heretofore published.

**Model: American Audio® ELS GO 15BT - Professional Powered Sound Reinforcement Loud Speaker**

<b>Dimensions:</b>	22" (L) x 15" (W) x 12" (H) / 558.8mm x 381mm x 317.5mm
<b>Weight:</b>	25 Lbs. / 12 kgs
<b>Environmental conditions:</b>	Operational temperature: 5 to 35°C (41 to 95°F) Operational humidity: 25 to 85% RH (non-condensation) Storage temperature: -20 to 60°C (4 to 140°F)
<b>Frequency Response:</b>	80Hz - 20KHz
<b>Nominal Dispersion:</b>	LF: 15" (300mm) Non-press paper cone with cloth suspension, 1.6" (40mm) KSV coil, 23OZ magnet

**Amplifier Section:**

<b>Power supply:</b>	AC 115v-230v, 50/60Hz
<b>Accessories:</b>	I.E.C. Power Cord
<b>Input Sensitivity:</b>	0.5V
<b>Output Sensitivity:</b>	92dB(1m/1w)
<b>Max. SPL:</b>	110dB
<b>Input Impedance:</b>	4ohm
<b>Balanced:</b>	Line 20K Ω, Mic 3.6K Ω
<b>Unbalanced:</b>	Line 10K Ω, Mic 1.8 Ω
<b>Crossover:</b>	
<b>Low Pass:</b>	2nd order filter 2.7KHz @ 12dB/octave
<b>Low Cut:</b>	2nd order filter 40Hz 12dB/octave
<b>S/N Ratio:</b>	Line 100dB, Mic 80dB
<b>Channel Equalizer:</b>	
<b>Bass:</b>	100Hz ±15dB
<b>Treble:</b>	10KHz ±15dB

**NOTES:**

*The specifications are subject to change to any improvement by negotiations in advance.  
The parts are subject to change to any improvement within the range of the specifications.*

All Rights Reserved. All content, trademarks and logos are copyright by their respective owners. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks is under license.

**Follow Us On:**



[facebook.com/americanDJ](https://facebook.com/americanDJ)  
[twitter.com/americanDJ](https://twitter.com/americanDJ)  
[youtube.com/adjlighting](https://youtube.com/adjlighting)

©American Audio® World Headquarters:  
6122 S. Eastern Ave. Los Angeles, CA 90040 USA  
Tel: 323-582-3322 Fax: 323-725-6100  
Web: [www.AmericanAudio.us](http://www.AmericanAudio.us) E-mail: [info@americanaudio.us](mailto:info@americanaudio.us)

American DJ Europe  
Junostraat 2  
6468 EW Kerkrade  
Netherlands

[service@americandj.eu](mailto:service@americandj.eu) / [www.americandj.eu](http://www.americandj.eu)  
Tel: +31 45 546 85 00 / Fax: +31 45 546 85 99