


# CUEPIX PAR 300™

SKU# CUE313



## Photometric Data

Specifications are subject to change without any prior written notice.

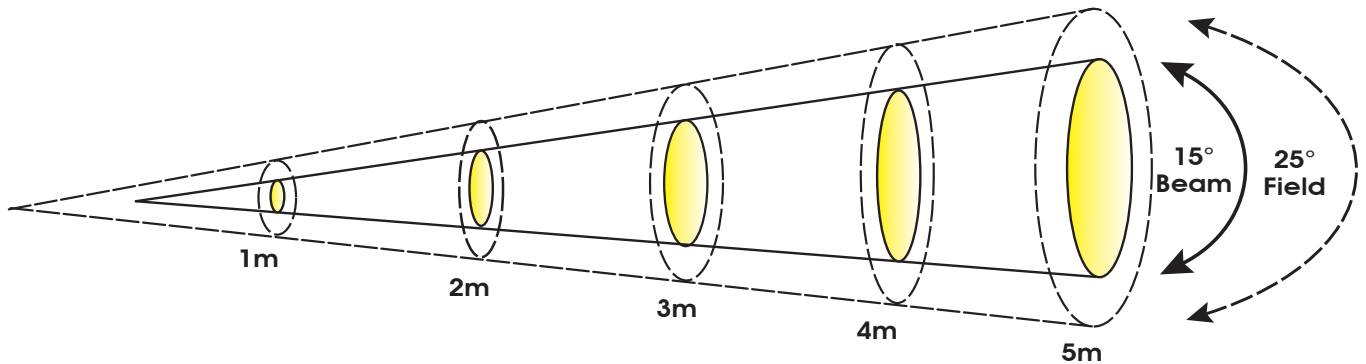

	m		ft		m		ft		m		ft		m		ft	
Distance	1	3.3	2	6.6	3	9.8	4	13.1	5	16.4						
15° Beam Diameter	0.66	2.2	0.84	2.8	1.18	3.9	1.35	4.4	1.62	5.3						
25° Field Diameter	0.75	2.5	1.18	3.9	1.63	5.3	2.07	6.8	2.51	8.2						
<b>Photometrics</b>	<b>lux</b>	<b>fc</b>	<b>lux</b>	<b>fc</b>	<b>lux</b>	<b>fc</b>	<b>lux</b>	<b>fc</b>	<b>lux</b>	<b>fc</b>	<b>lux</b>	<b>fc</b>	<b>lux</b>	<b>fc</b>	<b>lux</b>	<b>fc</b>
RED LEDs	6,458	600	1,860	173	930	86	526	49	331	31						
GREEN LEDs	7,110	661	2,140	199	1,078	100	606	56	395	37						
BLUE LEDs	10,620	987	3,030	281	1,520	141	841	78	552	51						
FULL ON	24,200	2,248	7,110	661	3,230	300	1,925	179	1,250	116						

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands  
 +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu