

SWT24L

HIGH PERFORMANCE UNI-DIRECTIONAL MICRO-LAPEL MICROPHONE



FEATURES

- Provides Crisp, Clear Sound Pickup
- Compact, Miniature, Low-Profile Design
- Professional Quality and Reliability
- Durable Black Copper Case Construction



SPECIFICATIONS

| | |
|-----------------------------------|--|
| Generating Element: | Back Electret Condenser |
| Polar Pattern: | Uni-directional |
| Open Circuit Sensitivity: | -48 dB (re: 1V/ Pa) @ 1 kHz |
| Impedance: | 1000 ohms \pm 20% @ 1 kHz (RL=1.2k ohms) |
| Self Noise: | 33 dBA |
| Frequency Response: | 80 - 17,000 Hz |
| Signal to Noise: | 61 dB @ 1 Pa |
| Operating Voltage (Power Module): | 1.5 - 10V DC |
| Standard Operating Voltage: | 1.5V DC |
| Maximum Input SPL: | 110 dB @ 1% THD |
| Dynamic Range: | 77 dB |
| Cable: | 1.5 m/ 5 ft. (standard) |
| Cable Type: | Single-conductor/Shielded |
| Connector: | TA4 |
| Dimensions: | 18 mm x 7.4 mm / 0.71 in. x 0.29 in. |
| Weight: | 3 g/ 0.1 oz. (without cable) |

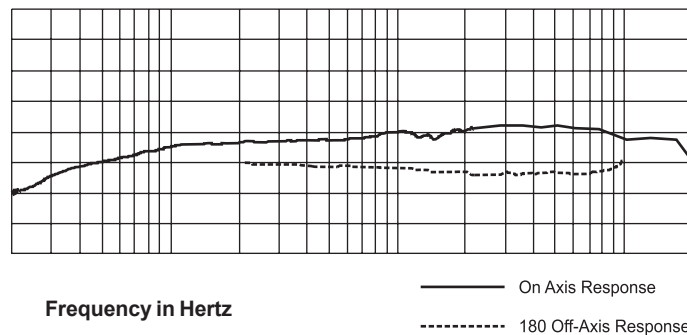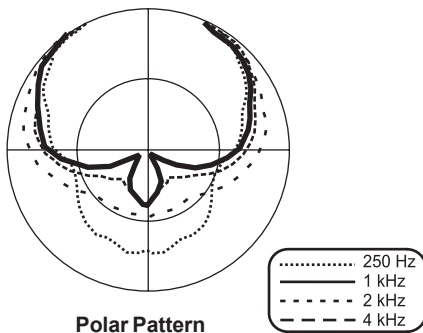

© 2004 Sabine, Inc.

Sabine, Inc.
13301 NW US Highway 441
Alachua, Florida 32615-8544 USA
+USA (386) 418-2000
+USA (386) 418-2001 fax
www.Sabine.com

SABINE[®]
ADAPTIVE AUDIO