

# R.15COAX

TWO-WAY 6.5-INCH COAXIAL  
WEATHER-RESISTANT LOUDSPEAKER



## TECHNICAL SPECIFICATIONS

### SYSTEM

<b>Loudspeaker Type:</b>	Full-range, two-way, coaxial, weather-resistant	
<b>Operating Range:</b>	90 Hz to 16 kHz (-10 dB)	
<b>Frequency Response:</b>	125 Hz to 12.5 kHz (-3 dB)	
<b>Max Input Ratings:</b>	150W RMS, 300W Program 35 volts RMS, 69 volts momentary peak	
<b>Autoformer Taps—70V:</b>	120W, 60W, 30W, 15W and low impedance	
<b>100V:</b>	120W, 60W, 30W	
	<b>MUSIC</b>	<b>SPEECH</b>
<b>Maximum Output:</b>	116 dB (122 dB peak)	117 dB (123 dB peak)
<b>Sensitivity (1W / 1m)</b>	94 dB (125 Hz - 10 kHz)	95 dB (125 Hz - 10 kHz)
<b>Free Space SPL:</b>	92 dB (250 Hz - 4 kHz)	93 dB (250 Hz - 4 kHz)
<b>Nominal Impedance:</b>	8 ohms, 4.2 ohms @12.5 kHz minimum	
<b>Nominal Beamwidth (-6dB):</b>	100° x 100°, 2 kHz to 10 kHz	
<b>Axial Q / DI:</b>	13.2/11.2, 2 kHz to 10 kHz	
<b>Crossover Frequency:</b>	1.3 kHz	
<b>Recommended High Pass:</b>	90 Hz 24 dB / Octave	
<b>Recommended Amplifier:</b>	300W to 450W at 8 ohms	
<b>COAXIAL TRANSDUCERS</b>		
<b>Low Frequency:</b>	1 x 6.5" Carbon ring NeverWet™* treated cone, 2" VC	
<b>High Frequency:</b>	1 x 1.25" exit compression	

### PHYSICAL

<b>Input Connection:</b>	NL4 Speakon-type connector and 2-position terminal strip for low impedance or constant voltage operation
<b>Controls:</b>	5-position wattage/low impedance selector switch, Music / speech switch
<b>Enclosure:</b>	ABS plastic, matte finish, paintable
<b>Finish:</b>	Light Grey, Black or White (standard) RAL # 7038, 9004 or 9003
<b>Mounting/Rigging Provisions:</b>	Two M8 rigging points, zinc-rich epoxy dual-layer powder-coated yoke, included integral safety cable mounting point
<b>Grille:</b>	3-layer Weather-Stop™ featuring NeverWet™ treated polyester mesh, foam, zinc-rich dual-layer powder-coated perforated steel color-matched to enclosure
<b>Input Panel Weather Cover:</b>	Color-matched ABS plastic with 13.5mm ID gland nut installed in .82" knockout
<b>Environmental:</b>	IP55W per IEC 529 at 5° down-tilt, designed to MIL-STD-810G
<b>Dimensions – H x W x D:</b>	9" x 10.15" x 10.2" (229 x 258 x 259 mm)
<b>Loudspeaker Unit Weight:</b>	17 lbs (7.7 kg) with included yoke
<b>Shipping Weight:</b>	21 lbs (9.5 kg)

### ACCESSORIES

<b>Vari-Tilt™ Mounting Yoke:</b>	R-VTY15. Provides pan-tilt aiming functions. Zinc-rich dual-layer powder-coated steel with SS hardware, color-matched to loudspeaker.
----------------------------------	---



Shown with grille removed



Available in Light Grey, Black or White (standard)

### APPLICATIONS

- Theme and Amusement Parks
- Outdoor Entertainment Centers
- Malls, Fairgrounds, Race Tracks
- Multipurpose Indoor/Outdoor Venues
- Background Music / Voice Paging
- Systems
- Athletic Fields
- Swimming Pools
- Convention Centers
- Cruise Ships
- Factories
- Stadiums, Arenas

### FEATURES

- Excellent musicality and intelligibility, and low distortion in an extremely compact enclosure
- Weather-resistant, compact, matte finish paintable high impact ABS plastic modified-trapezoidal enclosure
- NeverWet™ treated grille and LF driver cones, polymer HF diaphragm, and moisture-sealed crossover
- Corrosion-resistant zinc-rich epoxy dual-layer powder-coated steel grille and low-profile yoke
- Real compression driver on Tru-Phase™ waveguide
- 120W Autoformer (standard), selectable 8 ohm or 70V/100V operation
- High sensitivity, high output
- Light Grey, Black and White finish standard - Custom colors available upon request.
- Five-year product warranty / Fifteen-year enclosure warranty

### DESCRIPTION

The R.15COAX is a two-way, full-range loudspeaker system designed to provide high quality voice and music reproduction in applications requiring extreme weather resistance. It is designed to withstand long-term exposure to tough, environmental conditions and to provide performance normally associated only with indoor loudspeakers. The R.15COAX has a 1.25-inch (32mm) exit HF compression driver and an 6.5-inch (165mm) carbon ring cone LF driver. The HF assembly is coaxially mounted with the LF driver allowing wide 100° coverage with low distortion. The flange-less cone design provides a cone area nearly equivalent to a typical 8-inch driver cone.

The Music / Voice switch provides an out-of-the-box selectable response allowing for additional application flexibility. The design uses Community's proprietary Tru-Phase™ phase plug to provide wide dispersion, low distortion and increased intelligibility. The enclosure is sealed to provide maximum vocal clarity and increased intelligibility. The sealed enclosure also provides supreme weather protection for all of the interior components.

NOTE: All wattage figures are calculated using the rated impedance.  
\* NeverWet is a registered trademark of NeverWet, LLC.


Community strives to improve its products on a continual basis. Specifications are therefore subject to change without notice.

# R.15COAX


TWO-WAY 6.5-INCH COAXIAL  
WEATHER-RESISTANT LOUDSPEAKER




## FREQUENCY RESPONSE

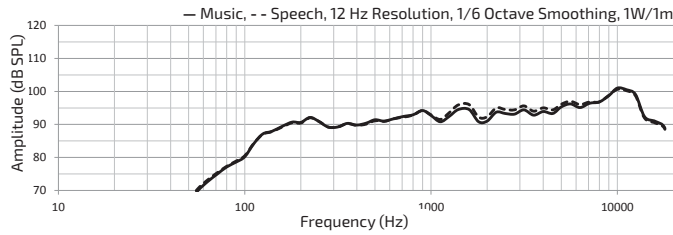


## IMPEDANCE

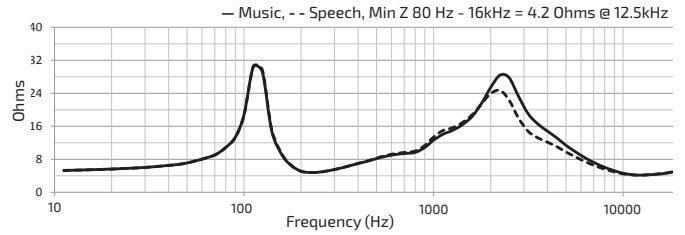




## BEAMWIDTH

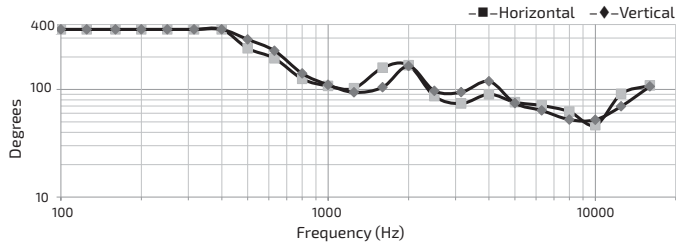

## AXIAL Q

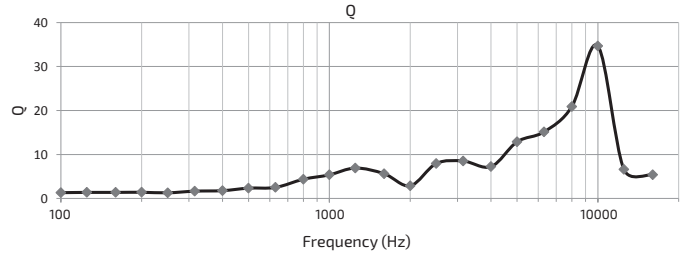

## DIMENSIONS

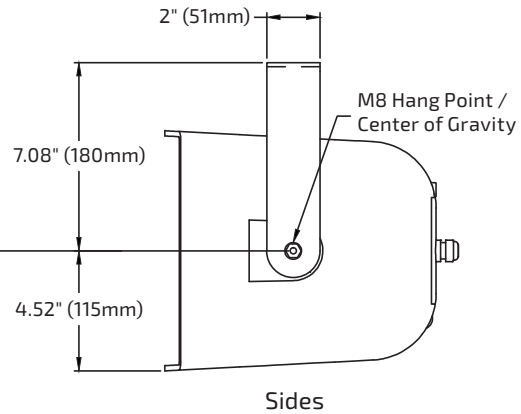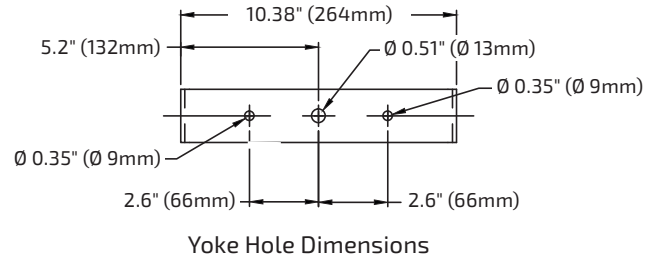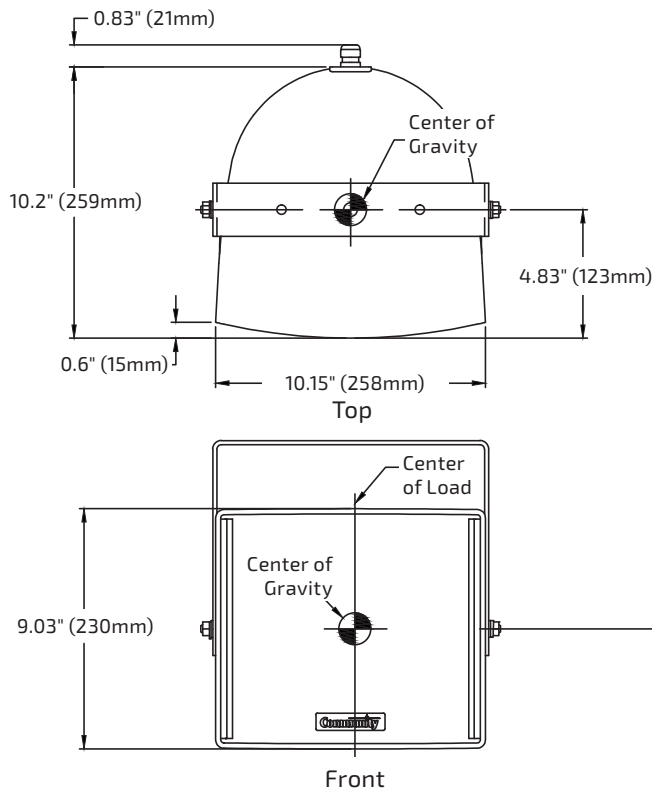

## ARCHITECTURAL SPECIFICATIONS

The loudspeaker system shall be a two-way, full-range modified trapezoidal design with one 6.5-inch (165mm) high-output LF driver and one 1.25-inch (32mm) exit HF driver mounted coaxially. Drivers shall be connected to an integral crossover with a crossover frequency of 1.3 kHz. The input connections shall be an NL4-type connector and a terminal strip. There is also a 2-position switch for voice or music applications and a selector switch for autoformer tap or low impedance operation. The loudspeaker enclosure shall be matte finish high impact ABS plastic with a 1mm perforated steel grille backed by NeverWet™ treated polyester mesh and open cell foam. There shall be two M8 rigging points, and an included steel dual-layer powder-coated mounting yoke. Integrated ribbing and internal reinforcements provide added structural support. The system shall have a frequency response of 125 Hz to 12.5 kHz (-3 dB SPL) and an input capability of 35V RMS. At the music setting, it shall have a sensitivity at 1W / 1m, 8 ohms nominal impedance, of 94 dB (125 Hz - 10 kHz) and 92 dB (250 Hz - 4 kHz). At the voice setting, it shall have a sensitivity at 1W / 1m, 8 ohms nominal impedance, of 95 dB (125 Hz - 10 kHz) and 93 dB (250 Hz - 4 kHz). The nominal dispersion shall be 100° H x 100° V from 2 kHz to 10 kHz. The loudspeaker shall be 9" (229mm) H (front) x 10.2" (259mm) W x 10.2" (259mm) D and shall weigh 17 lbs (7.7 kg) including the mounting yoke.

**CAUTION:** Installation of loudspeakers should only be performed by trained and qualified personnel.  
It is strongly recommended that a licensed and certified professional structural engineer approve the mounting design.