

## SPECIFICATION SHEET



## 2-Port HDMI Switch—Decora Style Wall Plate

- Autosensing function allows automatic device selection when a new source is plugged in such as a tablet or notebook.
- Manual switching provides the user with the control to switch between sources such as a Bluray player or computer.
- Multiple face plate color options to match the decor of a room.
- 2.5Gbps bandwidth
- Supports Deep Color
- 3 Year Warranty

## Specifications: 2-Port HDMI Switch—Decora Style Wall Plate

### Electrical Specifications:

---

Power Requirements	5V (from HDMI source)
Maximum Bandwidth	2.5Gbps per channel
Propagation Delay	≤2ns
Supply Voltage	VDD = 3.3V ±5%
Termination Resistors	Integrated 50Ω (±10%)
Supply Voltage on Ground Potential	-0.5V to +4.0V
DC Input Voltage	-.05V to VDD
DC Output Current	120mA

### Signal Specifications:

---


Maximum Bandwidth	2.5Gbps per channel
HDMI	Supports Deep Color
Maximum Video Resolution	1080p
Video Resolutions Supported	640 x 480 @ 72Hz, 640 x 480 @ 75Hz, 800 x 600 @ 56Hz, 800 x 600 @ 60Hz, 800 x 600 @ 72Hz, 800 x 600 @ 75Hz, 1024 x 768 @ 60Hz, 1024 x 768 @ 70Hz, 1024 x 768 @ 75Hz, 1280 x 1024 @ 75Hz, 1920x1080 @ 60Hz

### Physical Specifications:

---

Inputs	HDMI Female x 2
Output	HDMI Female x 1
Dimensions (HxWxD)	64.55 x 31 x 31.8mm (Output cable 98.5 ± 10mm) 2.54 x 1.22 x 1.25 inches (Output cable 3.88 ± .4 inches)
Operating Temperature	5°C to 40°C; 10-90% RH (Non-Condensing)
Storage Temperature	-20°C to 64°C; 10-90% RH (Non-Condensing)

## Specifications: 2-Port HDMI Switch—Decora Style Wall Plate

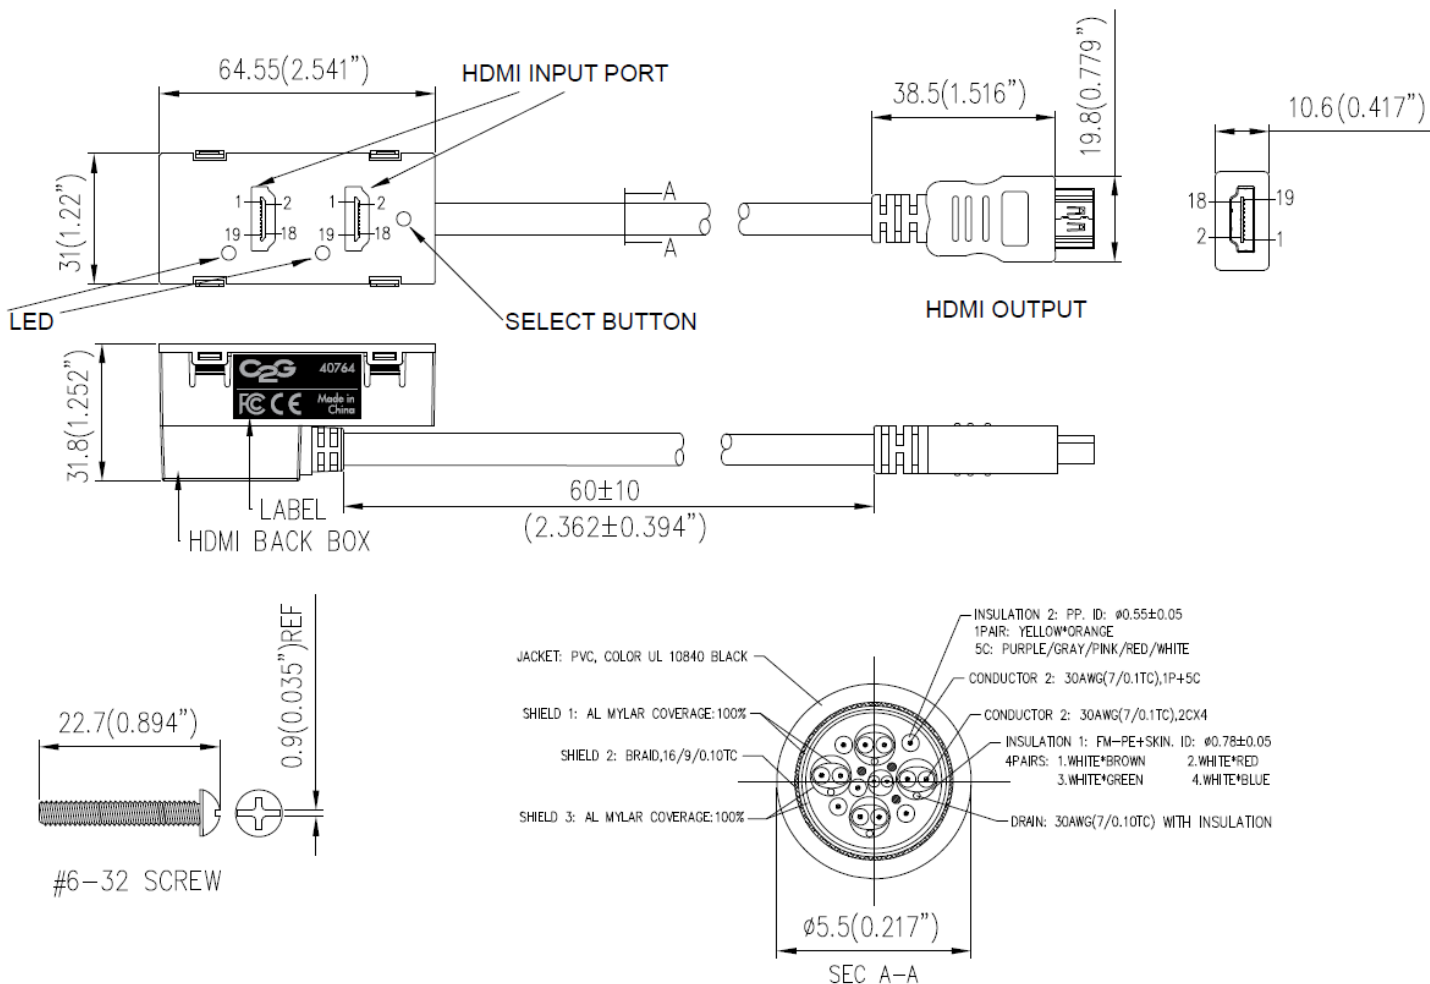

Part Number	Description	Weight (lbs)
40764	2-Port HDMI Switch—Decora Style Wall Plate	.55



**CABLES TO GO**

Cables To Go  
 3555 Kettering Blvd.  
 Moraine, OH 45439  
 Phone: 800.287.2843  
 www.c2g.com

Follow Us

