





DL-HD70LS Technical Specifications

Slim 70m HDMI with IR Extender Set
Rev 161129

The DigitalInX DL-HD70LS extender set transmits HDMI (1080p, 4Kx2K (UHD) & 3D), including HDCP 2.2, and bidirectional IR up to 70 meters away using a single solid core, shielded Category 5e twisted pair cable.

Built-in surge protection helps ensure hassle-free and robust installations. The 12 volt power supply is secured with a screw-on connector to prevent the power from being accidentally disconnected.

The DL-HD70LS is sold only as a set. The individual transmitter and receiver are not compatible with other HDBaseT devices due to proprietary PoE circuitry.

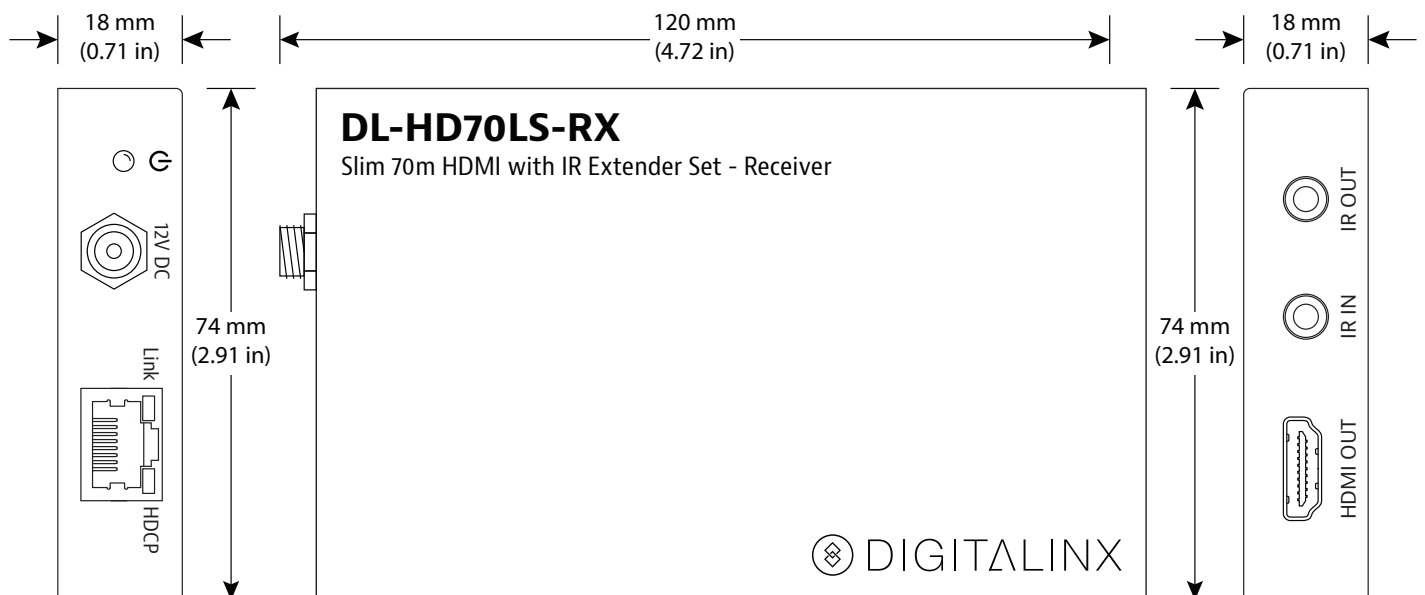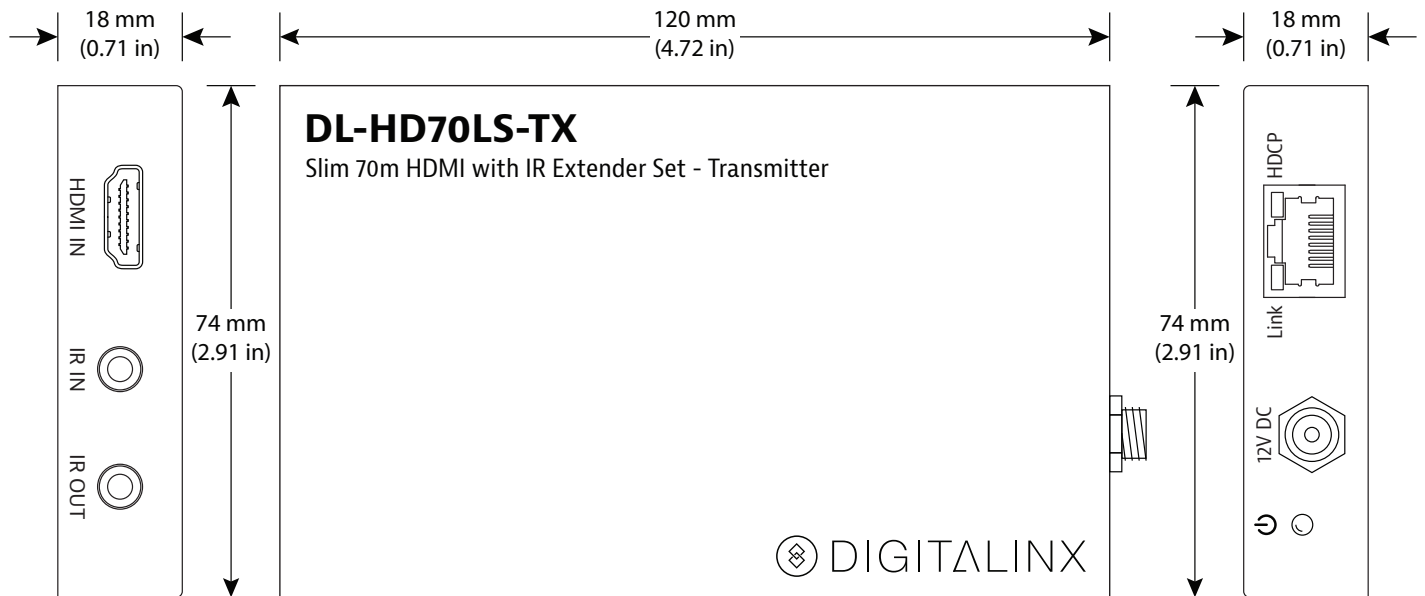

I/O Connections	
HDMI	One (1) HDMI Type A Receptacle
Twisted Pair	One (1) 8P8C port (Shielded RJ45)
IR Input	One (1) 3.5mm TRS Jack
IR Output	One (1) 3.5mm TS Jack
12V DC Power	One (1) 5.5 mm Outside Diameter, 2.1 mm Inside Diameter Barrel (Locking)
Supported Audio and Video	
Maximum Video Compatibility	70 m: Deep Color 36/30/24 Bit at 1080p 40 m: Deep Color 48 Bit at 1080p, 3D, and 4k x 2k (UHD) up to 30 Hz: RGB, YCbCr 4:4:4, YCbCr 4:2:2; up to 60 Hz: YCbCr 4:2:0
Video Compliance	HDMI, HDCP 1.3 through 2.2, and CEC (Consumer Electronics Control)
Embedded Audio	Up to PCM 8 channel, Dolby Digital TrueHD, and DTS-HD Master Audio
Input DDC Signal	5.0 volts p-p (TTL)
Input Video Signal	0.5 to 1.0 volts p-p
IR Carrier Frequency Range	33-55kHz at 5 volts
HDBaseT Signal Characteristics	
Maximum Distance	70 m
Cable Requirements	Solid core shielded Category 5e, Category 6 or greater with TIA/EIA-568B crimp pattern
Bandwidth	10.2 Gbps
Gain	0 dB – 10 dB at 100 MHz
Signal to Noise Ratio (SNR)	> 70 dB at 100 MHz over 100 m
Return Loss	< -30 dB at 5 KHz
Total Harmonic Distortion (THD)	< 0.005% at 1 KHz
Min-Max Signal Level	< 0.3 V – 1.45 Vp-p
Differential Phase Error	±10° at 135 MHz over 100 m
Chassis and Environmental	
Enclosure	Painted aluminum
Dimensions	18 mm x 120 mm x 74 mm (0.71 in x 4.72 in x 2.91 in)
Shipping Weight	0.82 kg (1.8 lbs.)
Operating Temperature (Environment)	0° to +40° C (+32° to +104° F)
Operating Temperature (Chassis)	31° C (88° F) (S); 38° C (100° F) (R)
Operating Humidity (Environment)	20% to 90%, Non-condensing
Storage Temperature (Environment)	-10° to +60° C (+14° to +140° F)
Storage Humidity (Environment)	20% to 90%, Non-condensing
Power, ESD, and Regulatory	
Maximum Power Consumption	3 watts (S), 6 watts (R)
Power Supply	12V DC
ESD Protection	15kV
Regulatory	CE, RoHS
Other	
Standard Warranty	2 Years
Diagnostic Indicators	Power, Status, Link, and HDCP LEDs
Included Items	Installation Guide, power supply, US power cord, mounting "L" brackets (4 ea), mounting screws (4 ea)
IR Transmitter (Included)	DIGIB-EMT
IR Receiver (Included)	DIGIB-EYE, IR-AC

Distances and picture quality may be affected by cable grade, cable quality, source and destination equipment, RF and electrical interference, and cable patches.