

SPECIFICATION SHEET



HDMI, VGA and Stereo Audio HDBaseT over Cat5 Extender Wall Plate Transmitter

- Extend HDMI, VGA and Stereo Audio up to 230 feet at a 1080p resolution
- HDBaseT technology utilizes a single category patch cable for extension and supports HDCP and EDID pass through
- Three methods for input switching, Auto, Manual, Serial RS232
- TruChoice[™] power allows for power at the transmitter or receiver end
- Compatible with any HDBaseT receiver from C2G
- TAA compliant

Specifications: HDMI, VGA and Stereo Audio HDBaseT over Cat5 Extender Wall Plate Transmitter

Electrical Specifications:

Maximum Distance Supported:	230ft (70m) at 1920 x 1080
Maximum Distance Supported:	115ft (35m) at 3840 x 2160
Maximum Resolution Supported:	3840 x 2160 (UHD—HDMI) 1920 x 1200—VGA
Supports:	HDBaseT, HDCP, Serial Control


Power Adapter:

Input Voltage:	100-240 VAC, 50~60HZ
Output Voltage/Amperage:	0.6A, 18VDC, 1.0A
Cable Length:	1530±100mm
Plug Diameter:	4.75mm, ID=1.7mm
Center Pin Polarity:	Positive

Physical Specifications:

Operating Temperature:	0~40°C; 0-80%RH (Non-condensing)
Storage Temperature:	-10~60°C; 0-80%RH (Non-condensing)
Approvals:	CE
Warranty:	3 Years

Specifications: HDMI, VGA and Stereo Audio HDBaseT over Cat5 Extender Wall Plate Transmitter

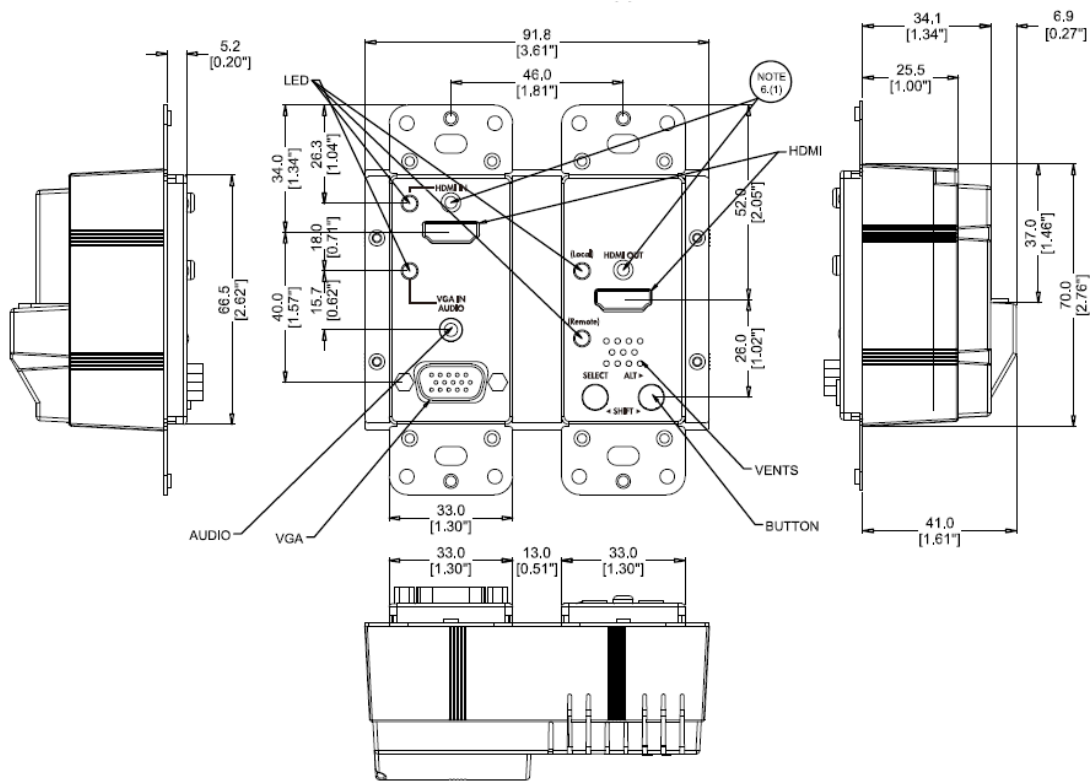

Part Number	Description	Weight (lbs)
29301	HDMI, VGA and Stereo Audio HDBaseT over Cat5 Extender Wall Plate Transmitter	1.768
29218	HDMI, VGA and Stereo Audio HDBaseT over Cat5 Extender Kit	3.413



CABLES TO GO

Cables To Go
 3555 Kettering Blvd.
 Moraine, OH 45439
 Phone: 800.287.2843
 www.c2g.com

Follow Us

