


zylight

Pro-Panel

INTELLIGENT LED LIGHTING

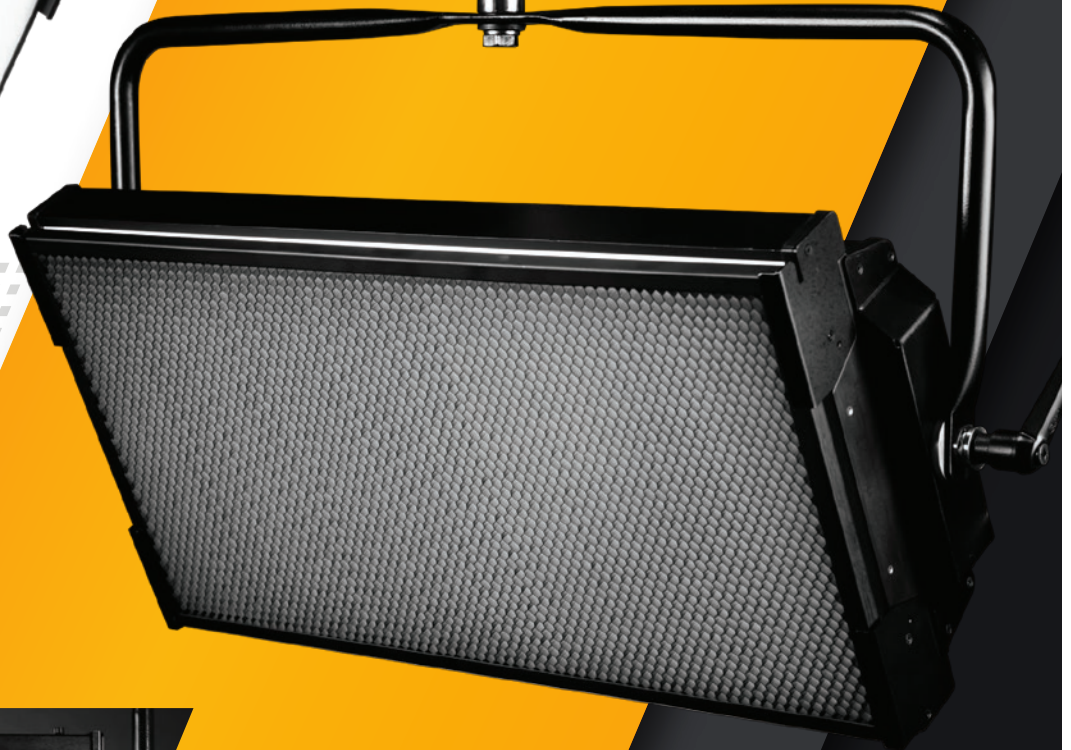

- 2700K – 6500K Variable Color Temperature
- Fully Dimmable with Continuous DMX 512 Control
- Flicker-Free for High Speed Frame Rates
- Up to 95 CRI
- Adjustable Yoke for Studio Grid or Portable Stand
- On-Board Controls and Custom Presets
- Lightweight, Slim Design
- 3-Year Warranty

www.zylight.com | sales@zylight.com


zylight

zylight Pro-Panel

Better Soft Lighting


The diffused softness of Zylight's Pro-Panel™ V2 1x2 and 2x2 panel lights eliminates the harsh glare and multiple shadow effects associated with typical budget LED fixtures. Pro-Panel soft lights also offer variable color temperature and flicker-free operation, as well as the cool operation, energy savings, and long life you expect from LED fixtures.

Pro-Panel 1x2 Specifications


Watt:	100
Weight:	12 lbs
Luminous Flux (lm)	
2700K:	4800
6500K:	5300
Maximum Illumination	
LUX @ 1m: 2700K / 6500K	1750 / 1900
FC @ 1m: 2700K / 6500K	163 / 177
CRI:	90-94
Color Temp (K):	2700K-6500K

Input Voltage (V):	Typical 100~240
Power Factor Min.:	0.9
Beam Angle:	110 degrees


Daylight Spectrum




Tungsten Spectrum



Cone Diagram

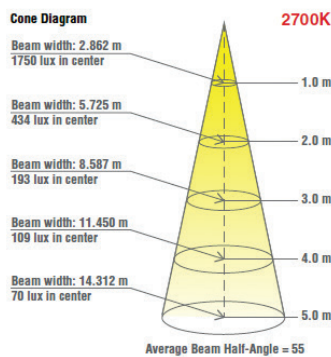

Cone Diagram

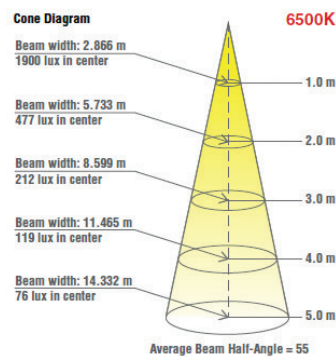


Pro-Panel 2x2 Specifications


Watt:	100
Weight:	16 lbs
Luminous Flux (lm)	
2700K:	6100
6500K:	7000
Maximum Illumination	
LUX @ 1m: 2700K / 6500K	2200 / 2500
FC @ 1m: 2700K / 6500K	204 / 232
CRI:	90-95
Color Temp (K):	2700K-6500K

Input Voltage (V):	Typical 100~240
Power Factor Min.:	0.9
Beam Angle:	110 degrees


Daylight Spectrum




Tungsten Spectrum



Cone Diagram

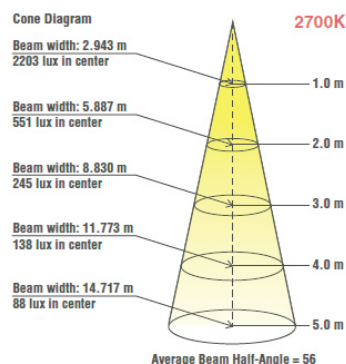

Cone Diagram

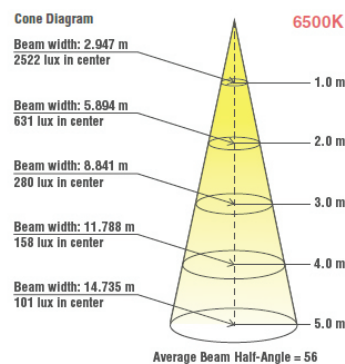

Form No. PRO-PANEL/1217

Specifications may be subject to change without prior notice. Refer to www.ushio.com for the most current product specifications.

zylight