




## 1192A Non-Paired - Microphone and Musical Instrument Cable

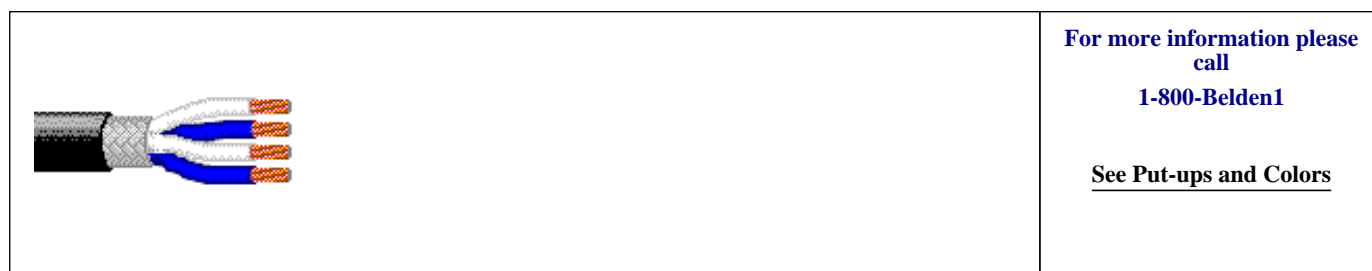

**Description:**

24 AWG stranded (42x40) high-conductivity bare copper conductors, polyethylene insulation, tinned copper braid shield (95% coverage), PVC jacket.

**PHYSICAL CHARACTERISTICS:**

**CONDUCTOR:**

Number of Conductors	4
Total Number of Conductors	4
AWG	24
Stranding	42x40
Conductor Diameter	.024 in.
Conductor Material	SBC - Soft Bare Copper

**INSULATION:**

Insulation Material	PE - Polyethylene
Nom. Insulation Wall Thickness	.016 in.
Insulation Diameter	.056 in.

**OVERALL CABLING:**

Overall Cabling Color Code Chart :

Number	Color	Number	Color
1	Blue	3	Blue w/White Stripe
2	White	4	White w/Blue Stripe

**OUTER SHIELD:**

Outer Shield Type	Braid
Outer Shield Material	TC - Tinned Copper
Outer Shield % Coverage	95 %

**OUTER JACKET:**

Outer Jacket Material	PVC - Polyvinyl Chloride
Outer Jacket Nominal Wall Thickness	.045 in.

**OVERALL NOMINAL DIAMETER:**

Overall Nominal Diameter	.245 in.
--------------------------	----------



## 1192A Non-Paired - Microphone and Musical Instrument Cable

**MECHANICAL CHARACTERISTICS:**

Operating Temperature Range	-30°C To +75°C
Non-UL Temperature Rating	75°C
Bulk Cable Weight	33 lbs/1000 ft.
Max. Recommended Pulling Tension	21 lbs.
Min. Bend Radius (Install)	2.45 in.

**APPLICABLE SPECIFICATIONS AND AGENCY COMPLIANCE:**

**PLENUM/NON-PLENUM:**

Plenum (Y/N)	N
--------------	---

**ELECTRICAL CHARACTERISTICS:**

Nom. Characteristic Impedance	40 Ohms
Nom. Inductance	.21 µH/ft
Nom. Capacitance Conductor to Conductor @ 1 KHz	39.2 pF/ft
Nom. Cap. Between Cond. in a Quad Config. @ 1 KHz	57.4 pF/ft
Nominal Velocity of Propagation	66 %
Nom. Conductor DC Resistance @ 20 Deg. C	26.6 Ohms/1000 ft
Nominal Outer Shield DC Resistance @ 20 Deg. C	7.1 Ohms/1000 ft
Max. Operating Voltage - UL	100 V RMS

Max. Operating Voltage - Other :

Other Voltage	Description
18.0 kV	Nom. breakdown voltage between conductors
16.9 kV	Nom. breakdown voltage conductors to shield

Max. Recommended Current	2.9 Amps per conductor @ 25°C
Other Electrical Characteristic 1	2/c 21 AWG equivalent DCR when connected to a 3-pin XLR

**NOTES:**

Notes	Quad connection scheme: The two blue wires (or wires directly opposite one another) are connected together to form one conductor, and similarly the two white wires (or remaining wires) are connected together to form the second conductor.
-------	---

**PUT-UPS AND COLORS:**

Item	Description	Put-Up (ft.)	Ship Weight (lbs.)	Jacket Color	Notes
1192A B59100	4 #24 PE SH PVC BLK MTT	100	4.1	BLACK, MATTE	
1192A B591000	4 #24 PE SH PVC BLK MTT	1000	37	BLACK, MATTE	C
1192A B59500	4 #24 PE SH PVC BLK MTT	500	18	BLACK, MATTE	C
1192A G7V1000	4 #24 PE SH PVC RED MTT	1000	37	RED, MATTE	C



## 1192A Non-Paired - Microphone and Musical Instrument Cable

1192A G7W1000	4 #24 PE SH PVC GRN MTT	1000	37	GREEN, MATTE	C
1192A G7X1000	4 #24 PE SH PVC BLU MTT	1000	37	BLUE, MATTE	C
1192A G7X500	4 #24 PE SH PVC BLU MTT	500	18	BLUE, MATTE	
1192A G8M1000	4 #24 PE SH PVC YEL MTT	1000	37	YELLOW, MATTE	
1192A U901000	4 #24 PE SH PVC GRY MTT	1000	37	GRAY, MATTE	C

C = CRATE REEL PUT-UP.

Revision Number: 1      Revision Date: 09-23-2004

© 2005 Belden Wire & Cable Company  
All Rights Reserved.

Although Belden Electronics Division ("Belden") makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability. Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein. All sales of Belden products are subject to Belden's standard terms and conditions of sale.