



MSR Hot Restrike

MSR 400 HR 1CT/4

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Product data

General Information		Ignition Supply Voltage (Min)	
Cap-Base	GZZ9.5 [GZZ9.5]		207 V
Operating Position	UNIVERSAL [Any or Universal (U)]	Controls and Dimming	
Main Application	Studio/Theatre	Dimmable	Yes
Life to 50% Failures (Nom)	1000 h	Mechanical and Housing	
System Description	Hot Restrike	Cap-Base Information	-
Light Technical		Luminaire Design Requirements	
Color Code	- [Not Specified]	Bulb Temperature (Max)	700 °C
Luminous Flux (Min)	28500 lm	Pinch Temperature (Max)	350 °C
Luminous Flux (Nom)	32000 lm	Product Data	
Chromaticity Coordinate X (Nom)	323	Full product code	871829122796000
Chromaticity Coordinate Y (Nom)	328	Order product name	MSR 400 HR 1CT/4
Correlated Color Temperature (Nom)	6000 K	EAN/UPC - Product	8718291227960
Luminous Efficacy (Rated) (Nom)	80 lm/W	Order code	928050205115
Color Rendering Index (Nom)	92	Numerator - Quantity Per Pack	1
Operating and Electrical		Numerator - Packs per outer box	4
Power (Rated) (Nom)	400 W	Material Nr. (12NC)	928050205115
Lamp Current (Nom)	6.9 A		


MSR Hot Restrike

Net Weight (Piece)	0.034 kg
--------------------	----------

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




MSR 400 HR

Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 400 HR	23 mm	6.0	59 mm	61 mm	60	110 mm	24 mm	23.5	23 mm
1CT/4		mm			mm			mm	

Photometric data

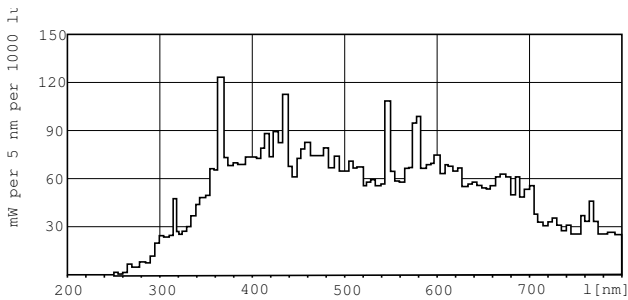

MSR 125, 200, 250, 400, 575, 1200 (C), 2500, 4000, 6000, 12000, 18000 HR

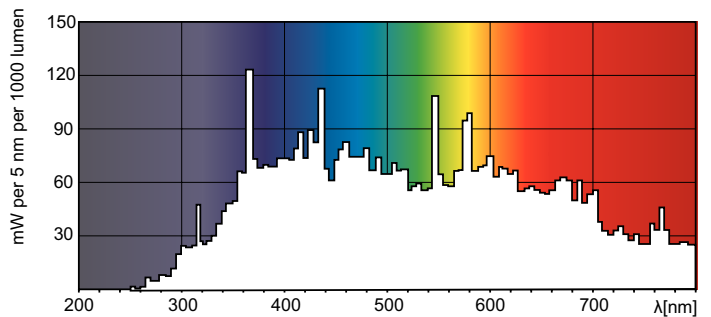

MSR Hot Restrike

