
Intensifier T® HD-TVI 1080p 2MP Outdoor Mini Turret Camera Wall/Ceiling Mount, UTC, 2BNC out for TVI & CVBS HINT71TG – Grey, 2.9mm HINT71TW – White, 2.9mm



200 New Highway, Amityville, NY 11701 800-645-5516 / www.specotech.com

DIMENSIONS

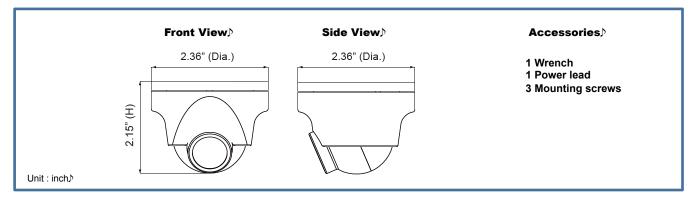

FEATURES

- Full HD resolution over coax (HD-TVI)
- · Supports up to Full HD 1080p @ 30fps
- True WDR operation
- Superior low-light performance
- · Amplify existing light with no distance limitation
- PRESET (Indoor/Outdoor/Lowlight/Hallway/Lobby/Elevator)
- Compact size only 2.36" in diameter
- Weather / Vandal resistant operation
- · 3-axis for wall and ceiling mounting
- Full OSD operation through UTC (up the coax)
- Additional 960H analog output (BNC out in Yellow)
- · Signal distance up to 1600 feet*
- · IP66 compliant
- 12VDC required
- 5 year warranty

SPECIFICATIONS


Image Sensor
Effective Pixels
Total Pixels 2000 (H) x 1121 (V)
Scanning System Progressive
S/N Ratio More than 50dB
Output Resolution 1920x1080 @ 30fps
Video Output 1.0Vp-p / 75 Ohms
Electronic Shutter Auto / Manual (1/30 – 1/30,000 sec.
Day / Night Auto / Color / BW / External
Test Monitor Output CVBS (BNC out in Yellow)
Communication UTC (up the coax)
Power 12VDC (power supply not included)
Power Consumption 12VDC, 150mA max.
Operating Temperature4° F – 122° F
Unit Dimensions 2.15" (H) x 2.36" (Dia.)
Unit Weight
Certifications FCC, RoHS
Signal Distance
(depending on coax quality)*

OSD MENU TREE (through UTC)

PRESET MODE

• INDOOR • OUTDOOR • LOW LIGHT • HALLWAY • LOBBY • ELEVATOR

MAIN SETUP



OSD MENU Details

M OSD Menu available only when using TVI output.
 Not available in standard analog mode.

IRIS: Controls various settings related to the lens.

ELC (Electronic Light Control): Used with manual lens only, stay with this mode for this item.

EXPOSURE: Adjusts exposure settings.

BRIGHTNESS: Adjusts image brightness. (0~20) SHUTTER: Auto / Manual Shutter can be selectable

- AUTO: Shutter can be selectable automatically.
- FLICKER(Flicker Less): Selects this when picture flickering. The picture flickering can be caused by a clash with the frequency of the installed lighting.
- Manual: Controls the shutter speed manually from 1/30 ~1/30000
 INTENSIFY: Sets the desired multiple of the digital exposure length. (OFF/x2 ~ x32)

AGC(Auto Gain Control): Adjusts the AGC level. (0~10)

Intensifier T® HD-TVI 1080p 2MP Outdoor Mini Turret Camera Wall/Ceiling Mount, UTC, 2BNC out for TVI & CVBS HINT71TG – Grey, 2.9mm HINT71TW – White, 2.9mm



200 New Highway, Amityville, NY 11701 800-645-5516 / www.specotech.com

OSD MENU Details

BACKLIGHT: Adjusts backlight options.

WDR: WDR illuminates darker areas of an image while retaining the same light level for brighter areas to even out the overall brightness of images with high contrast between bright and dark area

- Adjusts the WDR Weight (LOW/MIDDLE/HIGH)

* CVBS out cannot adjust this function.

BLC: Produces a clearer image of an object darkened by strong backlighting.

- H-POS : Adjusts the horizontal position(0~20)

- V-POS : Adjusts the Vertical position(0~20)

- H-SIZE : Adjusts the horizontal block size (0~20)

- V-SIZE: Adjusts the vertical block size (0~20)

HLC: Uses to contain extremely bright areas such as from car headlight, the light can be masked out much of the on-screen details.

DAY / NIGHT : Adjust Day / Night options.

COLOR: Always Color mode.

B/W: Always B/W mode.

- ANTI-SAT. : Adjusts the Anti Saturation level (0~20)

EXT: please do not use this function.

- ANTI-SAT.: Adjusts the Anti Saturation level (0~20)

- EXTERN S/W : Selected at manufacturer side

- D → N LEVEL (0~20) : Selected at manufacturer side

- N → D LEVEL (0~20): Selected at manufacturer side

- DELAY: Adjusts the changing delay time (LOW/MIDDLE/HIGH)

AUTO: Day / Night is switching automatically by AGC level.

- ANTI-SAT. : Adjusts the Anti Saturation level (0~20)

- AGC THRES: Adjusts AGC THRES (0~20)

- AGC MARGIN: Adjusts AGC margin (0~20)

- DELAY: Adjusts the changing delay time (LOW/MIDDLE/HIGH)

COLOR: Adjusts white balancing options.

AWB : it goes to optimized color level automatically. COLOR GAIN : Sets the desired Color Gain value (0~20)

MAIN OUTPUT : ANALOG OUT (stay as it is)

ANALOG OUT : TVI (stay as it is)

SPECO DNR: Uses to reduce the background noise in a low luminance environment with 2D + 3D filtering system.

- Adjusts the DNR level (LOW/MIDDLE/HIGH)

IMAGE: Adjusts various image options.

SHARPNESS: Adjusts sharpness level. Increasing this value, the picture outline becomes stronger and clear. (0~10)

GAMMA: Sets the desired Gamma value. (0.45 ~ 0.75)

 $\ensuremath{\mathsf{MIRROR}}$: Change the video direction horizontally.

FLIP: Change the video direction perpendicularly.

ACE (D-WDR): Uses a digital wide dynamic range to balance dark and over

saturated areas within the image.

DEFOG: Activated this mode when the video or the weather is foggy.

PRIVACY: Used to hide regions of the image.

- ZONE NUM: Selects the zone number up 15.

- ZONE DISP: Selects desired zone with ON or OFF

- H-POS : Adjusts the horizontal position(0~60)

- V-POS : Adjusts the vertical position(0~40)

- H-SIZE: Adjusts the horizontal size(0~40)

- V-SIZE: Adjusts the vertical size(0~40)

- Y-LEVEL: Adjusts the yellow color level (0~20)

- CR LEVEL : Adjusts the red color level (0~20)

- CB LEVEL: Adjusts the blue color level (0~20)

MOTION: Adjust motion detection settings.

- SENSITIVITY: Sets the desired of "Motion" (0~20)

- WINDOW TONE : Adjusts the window tone value (0~60)

- WINDOW USE: Adjusts the window setting size (0~3)

- WINDOW ZONE : activate or deactivate motion window

- DET H-POS :Adjusts the horizontal position(0~60)

- DET V-POS : Adjusts the vertical position(0~40)

- DET H-SIZE : Adjusts the horizontal size(0~60)

- DET V-SIZE : Adjusts the vertical size(0~40)

- ALARM : Select Alarm between ON of OFF

SYSTEM: Adjusts various camera system options.

OUTPUT

FRAME RATE: Select the frame rate 30fps/60fps according to the video output mode.

FREQ

COM.

- CAM ID: Sets the camera ID for the RS-485 (0~255)

- BAUD RATE: Sets the baud rate for the RS-485 (2400~115200).

IMAGE RANGE

COLOR SPACE

COLOR BAR: Manufacturer's option LANGUAGE: Sets the desired OSD language

CAMERA TITLE

RESET: Press with long to reset all settings to factory defaults.

speco technologies°

LIMITED WARRANTY - VIDEO PRODUCTS

THIS WARRANTY IS VALID ONLY ON PRODUCTS PURCHASED AND USED IN THE UNITED STATES OF AMERICA AND CANADA. THIS WARRANTY APPLIES ONLY TO THE ORIGINAL USER.

SUBJECT TO CONDITIONS AND EXCLUSIONS FOUND BELOW, THIS PRODUCT IS WARRANTED AGAINST MANUFACTURING DEFECTS IN MATERIAL AND WORKMANSHIP FOR THE FOLLOWING PERIOD FOR PARTS AND LABOR:

SPECO TECHNOLOGIES CA	MERAS5 YEARS	DVRs	3 YEARS
SPECO TECHNOLOGIES IP	CAMERAS2 YEARS	NVRs	3 YEARS
SPECO PTZ AND VL CAMER	AS1 YEAR	BALANCE OF	
SPECO TECHNOLOGIES MO	NITORS1 YEAR	SPECO TECHNOLOGIES LINE	1 YEAR

SPECO TECHNOLOGIES WILL REPAIR OR REPLACE (AT OUR DISCRETION) ANY PARTS FOUND TO BE DEFECTIVE FOR THE WARRANTY PERIOD SPECIFIED. WE WILL PROVIDE A REPLACEMENT FOR ANY DEFECTIVE PART.

CONDITIONS

1. YOU MUST OBTAIN A RETURN AUTHORIZATION (RA) NUMBER FOR ANY MERCHANDISE BEING RETURNED TO SPECO TECHNOLOGIES, WHETHER FOR RETURN/EXCHANGE OR REPAIR, WHETHER IN OR OUT OF WARRANTY.

2. THIS WARRANTY WILL BE HONORED ONLY UPON PRESENTATION OF THE ORIGINAL DATED BILL OF SALE OR SALES SLIP

3. TRANSPORTATION OF THE PRODUCT TO OUR SERVICE DEPARTMENT IS THE RESPONSIBILITY OF THE USER. REPAIRED OR REPLACED PRODUCT WILL BE RETURNED PREPAID DURING THE WARRANTY PERIOD.

PRODUCT WILL BE RETURNED PREPAID DURING THE WARRANTY PERIOD.

4. SPECO TECHNOLOGIES DOES NO JUTHORIZE AN WITENET OR MAIL ORDER PRODUCT SALES. IF A SPECO TECHNOLOGIES PRODUCT IS PURCHASED FROM AN UNAUTHORIZED DISTRIBUTOR OR OTHER SOURCE. INCLUDING RETALERS, MAIL ORDER SELLERS AND ONLINE SELLERS, IT WILL NOT BE HONDEROOF OR SERVICED UNDER THE EXISTING SPECO TECHNOLOGIES WARRANTY POLICY ANY SPECOT TECHNOLOGIES PRODUCT PURCHASED FROM THESE ONLINE WERCHANTS WILL VOID THE APPLICABLE WARRANTY AND IS INELIGIBLE FOR TECHNOLOGIES WARRANTY AND IS INELIGIBLE FOR TECHNOLOGIES WARRANTY AND IS INELIGIBLE FOR TECHNOLOGIES AUPPORT FOR UNIFE OUT AND SECOND THE SELLERS CONTACT SPECO TECHNOLOGIES AT 1-800-645-5516 FOR A LIST OF UNAUTHORIZED DEALERS, VISIT. www.specotech.com/unauthorized.

EXCLUSIONS

THIS WARRANTY SHALL NOT COVER ADJUSTMENT OF CUSTOMER OPERATED CONTROLS AS EXPLAINED IN THE APPROPRIATE MODEL'S INSTRUCTION MANUAL OR PRODUCTS WHICH HAVE BEEN ALTERED, ABUSED, OR HAVE MISSING OR ALTERED SERIAL NUMBERS.

2. THIS WARRANTY SHALL NOT APPLY TO UNCRATING, SETUP, INSTALLATION, OR THE REMOVAL AND REINSTALLATION OF PRODUCTS AFTER REPAIR.

A THIS WARRANTY SHALL NOT APPLY TO REPAIRS OR REPLACEMENTS NECESSITATED BY ANY CAUSE BEYOND THE RESULT OF MANUFACTURE INCLUDING, BUT NOT LIMITED TO, ANY MALFUNCTION, DEFECTS OR FAILURE CAUSED BY OR RESULTING FOR MANUFACTURE INCLUDING, BUT NOT ANY MALFUNCTION DEFECTS OR FAILURE CAUSED BY OR RESULTING SHOULD CAUSE OF THE FLOOD, OR OTHER ACTS OF NATURE INCORRECT LIME VOLTAGE, DAMAGE OR IMAGE BURNIS TO TELEVISION PICTURE TUBES CAUSED BY OR ATTRIBUTABLE TO THE USE OF ANY ACCESSORY, ELECTRONICS GAME OR DEVICE, OR DAMAGE CAUSED TO IMAGE PICKUP DEVICES BY EXCESSIVE LIGHT.

THE FORECOING IS IN LEU OF ALL OTHER EXPRESSED WARRANTES AND WE DO NOT AUTHORIZE ANY PARTY TO ASSUME FOR US ANY OTHER OBLIGATION OR LUBBLITY. IN NO EVENT SHALL WE BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING FROM THE USE OF THIS PRODUCT OR FOR ANY DELAY IN THE USE OF THIS PRODUCT DUE TO CAUSES BEYOND OUR CONTROL. SOME STATES DO NOT ALLOW FLIMITATIONS OF HOW LONG AN IMPLIED WARRANTY LASTS ANDOR DO NOT ALLOW THE EXCLUSION OR LIMITATION OF CONSEQUENTIAL DAMAGES. THE ADDRESS HAND THE PARTY TO YOU.

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS. YOU MAY HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

NOTE: FOR YOUR PROTECTION IN THE EVENT OF THEFT OR LOSS OF THIS PRODUCT, PLEASE FILL IN THE INFORMATION REQUESTED
BELOW AND RETAIN WITH YOUR SALES RECEIPT.

MODEL NO: SERIAL NO: SERIAL NO: DATE OF PURCHASE:

IRCHASED:	PURCHASE PRICE:
Speco Technologies 200 New Highway Amityville, NY 11701 www.specotech.com	FOR MORE INFORMATION REGARDING SERVICE OR RETURN, CALL US TOLL FREE: 1-800-645-5516 IN METRO NY: 631-857-8700

ALWAYS USE DISCRETION WHEN INSTALLING VIDEO AND/OR AUDIO SURVEILLANCE EQUIPMENT ESPECIALLY WHEN THERE IS AN EXPECTATION OF PRIVACY. INCURE REGARDION FEDERAL, STATE AND/OR LOCAL REGULATIONS APPLICABLE TO THE LAWFUL INSTALLATION OF VIDEO AND/OR AUDIO RECORDING OR SURVEILLANCE EQUIPMENT. PARTY CONSENT MAY BE REQUIRED.

Speco Technologies is constantly developing product improvements. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Rev. 161123

12-300 5/1