


# LEVEL PILOT X

## Desktop Speaker Volume Controller with XLR Connectivity



When connecting from a DAW with balanced outputs on 1/4" jacks, use the following type of cable:

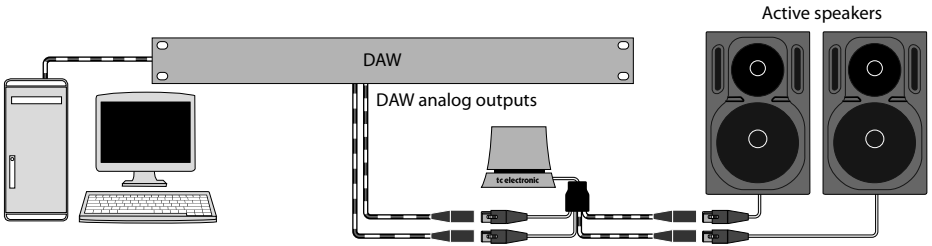

When connecting from a DAW with unbalanced outputs on 1/4" jacks, use the following type of cable:



When connecting to monitors with balanced inputs on 1/4" jacks, use the following type of cable:



When connecting to monitors with unbalanced inputs on 1/4" jacks, use the following type of cable:



## Specifications

### Connectors

Input	2 x XLR female, balanced
Output	2 x XLR male, balanced
Cable	Quad-core, 1.8 m

### System

Potentiometer	High-quality stereo, fully balanced
Range	$-\infty$ to 0 dB
Power requirements	None

### Physical

Finish	Aluminum, sandblast
Bottom surface	Rubberized
Dimensions(H x W x D)	51 x 60 x 60 mm (2 x 2.4 x 2.4")
Weight	0.4 kg (0.9 lbs)

## LEGAL DISCLAIMER

MUSIC Group accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNOY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and DDA are trademarks or registered trademarks of MUSIC Group IP Ltd. © MUSIC Group IP Ltd. 2017 All rights reserved.

## LIMITED WARRANTY

For the applicable warranty terms and conditions and additional information regarding MUSIC Group's Limited Warranty, please see complete details online at [music-group.com/warranty](http://music-group.com/warranty).