

Philips Signage Solutions
Multi-Touch Display

42"

Powered by Android
Multi-touch
500cd/m²

SignageSolutions

42BDL5055TT



Discover a new level of interaction

using the power of Android

Get even closer to your audience than ever before. Fast, precise and extremely durable, its high performance is matched by excellent reliability and functionality.

Supreme audience interaction

- Experience amazing interactivity with true Multi-Touch
- 10 points touch
- Anti-glare glass with low optical parallax

Innovative solutions for any signage application

- Android: Run your own app or choose your favorite app to run
- Save and play content with internal memory
- Enhance your connectivity with an integrated mPCIe slot.

Maximizing the impact of your message

- CMND: Take control of your displays

Care about you, your business and your audience

- Keep your content up and running with FailOver
- Ensure your content is running with automatic screenshots

PHILIPS

Highlights

Plug & Play Multi-Touch



A brand new level of interactivity is now available thanks to integrated touch technology. More flexibility and optimum simultaneous touch performance coupled with excellent operability opportunities to give you the ultimate in user interaction. The Multi-Touch displays are enabled with automatic touch recognition. The USB connector is HID compliant, providing true plug-and-play operation.

Anti-glare glass

With this integrated touch display, the anti-glare glass with low optical parallax allows for the most immersive touch experience. With little to no glare and low reflection on the display, images are crystal clear with pure color and great clarity.

Powered by Android

With Android OS integrated into the display, you can work with the most developed OS on the planet and save your own app directly onto the display. Or, choose from the large library of Android apps and play content from there. With the built-in scheduler, you can daypart your apps and content based on your customer and time of day. The auto orientation feature makes showing content in portrait or landscape as simple as turning the display.

Proof of Play

Content is king, and with the automatic screenshot feature, you can make sure that your content is up and running at all times. Screenshots are taken throughout the day, which are then stored in the FTP server. From there, the screenshots can be viewed no matter when, or where you are.

FailOver



Keeping your content up and running is critical for demanding commercial applications. While it is unlikely you will face a content disaster, FailOver provides content protection with a revolutionary technology that plays back-up content on screen in the event of a media player failure. FailOver automatically kicks in when the primary input fails. Simply select a primary input connection and a FailOver connection and you're ready for instant protection.

Internal Memory



Save and play content with internal memory. Upload your media into the display and playback content immediately. Working in conjunction with the internal browser, it also serves as a memory cache when streaming online content. If the network ever fails, the internal memory keeps content running by playing a cached version of the content, ensuring that your media stays up even if the network goes down.

CMND



A robust display management platform, CMND puts the power back into your hands. Update and manage content with CMND & Create and control your settings with CMND & Control. It's all possible with CMND.

CMND & Control



With CMND & Control, easily manage multiple displays in a central location. With real time display monitoring, setting and software updates from a remote location, and the ability to customize and configure multiple displays at once, such as video wall or menu board displays, controlling your suite of displays has never been easier.

CMND & Create




Design and create compelling content with CMND & Create, a powerful authoring tool. With a drag and drop interface, preloaded templates, and integrated widgets, you'll be able to amaze your customers with compelling content. Available in portrait and landscape mode.

PCI Slot

With an integrated PCI slot, you can connect a 4g LTE module, allowing for even greater communication with the display. Machine to machine communication is also enhanced, with numerous configurations for the customer to use, such as the ability to expand product features or signal-handling capability

OPS Insert

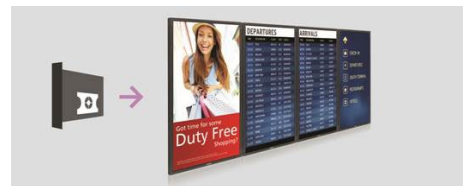

Turn your display into an all-in-one digital signage solution and create a display network which is connected, intelligent and secure. Open Pluggable Specification (OPS) is an industry standard slot into which you can add an OPS-standardized media player. This cable free solution gives you the ability to install, use or maintain your hardware whenever you need.

Specifications

Picture/Display

- Diagonal screen size: 41.9 inch / 106.5 cm
- Panel resolution: 1920x1080p
- Optimum resolution: 1920 x 1080 @ 60Hz
- Brightness: 500 cd/m²
- Contrast ratio (typical): 1300:1
- Dynamic contrast ratio: 500,000:1
- Aspect ratio: 16:9
- Response time (typical): 8 ms
- Pixel pitch: 0.4833 x 0.4833 mm
- Display colors: 1.07 billion
- Viewing angle (H / V): 178 / 178 degree
- Picture enhancement: 3/2 - 2/2 motion pull down, 3D Combfilter, Motion compens. deinterlacing, 3D MA deinterlacing, Dynamic contrast enhancement, Progressive scan

Connectivity

- Video input: DisplayPort (1.2), HDMI (x2), DVI-D, USB, VGA (via DVI)
- Video output: DisplayPort, DVI-I, VGA (via DVI-D)
- Audio input: 3.5 mm jack, Audio Left/Right (RCA)
- Audio output: Audio Left/Right (RCA), External speaker connector
- Other connections: mPCIe, micro SD, micro USB, USB power outlet (5 V. 2 amp), Built-in WiFi antennas, OPS
- External control: RJ45, RS232C (in/out) 2.5 mm jack, IR (in/out) 3.5 mm jack

Supported Display Resolution

Computer formats

Resolution	Refresh rate
3840 X 2160	30Hz (Tiling)
1920 x 1080	60Hz
1440 x 900	60Hz
1366 x 768	60Hz
1360 x 768	60Hz
1280 x 800	60Hz
1280 x 768	60Hz
1024 x 768	60Hz
800 x 600	56, 60, 72, 75Hz
640 x 480	60, 67, 72, 75Hz

Dimensions

- Set dimensions (W x H x D): 983 x 575 x 77.7 mm
- Set dimensions in inch (W x H x D): 38.7 x 22.6 x 3.1 inch
- Bezel width: 22 mm
- Product weight: 55.2 lb
- Product weight: 25.1 kg
- VESA Mount: 200 x 200 mm, M6

Convenience

- Placement: Landscape (24/7), Portrait (24/7)
- Tiled Matrix: Up to 15 x 15
- Keyboard control: Hidden, Lockable
- Signal Loop Through: DVI, VGA, RS232, IR Loopthrough, DisplayPort
- Network controllable: RJ45, RS232, One Wire (HDMI-CEC), HDMI (One Wire)
- Energy saving functions: Smart Power
- Screen saving functions: Pixel Shift, Low Bright
- Ease of installation: AC Out, Smart Insert

Power

- Standby power consumption: <0.4 W
- Mains power: 100 ~ 240 VAC, 50 ~ 60 Hz
- Consumption (Typical): 85 W
- Consumption (EPA 7.0): 71.08 W

Operating conditions

- Temperature range (operation): 0 ~ 40 °C
- Temperature range (storage): -20 ~ 60 °C
- Relative humidity: 20 ~ 80 %
- Altitude: 0 ~ 3000 m
- MTBF: 60,000 hour(s)

Video formats

Resolution	Refresh rate
1080p	50, 60Hz
1080i	50, 60Hz
720p	50, 60Hz
576i	50Hz
576p	50Hz
480p	60Hz
480i	60Hz

Sound

- Built-in speakers: 2 x 10W RMS

Accessories

- Included accessories: Remote Control, Batteries for remote control, Quick start guide, RS232 cable, AC Power Cord
- Optional accessories: Table top stand

Miscellaneous


- On-Screen Display Languages: English, French, German, Spanish, Polish, Turkish, Russian, Italian, Simplified Chinese, Traditional Chinese, Arabic, Japanese, Danish, Dutch, Finnish, Norwegian, Portuguese, Swedish
- Regulatory approvals: EnergyStar 7.0, CE, FCC, Class B, UL/cUL, CCC, C-Tick, RoHS, GOST, BSMI, CB, J-Moss, PSE, VCCI
- Warranty: 3 year warranty

Internal Player

- CPU: Octacore Cortex A53 1.5GHz
- GPU: PowerVR SGX6110
- Memory: 2GB DDR3
- Storage: 16GB EMMC

Multimedia Applications

- USB Playback Audio: AAC, AIF, AIFF, M4A, MP3, WAV, WMA, ASF, LPCM, M3U, MP4
- USB Playback Picture: BMP, GIF, JPEG, JPG, PDF
- USB Playback Video: M2TS, M4V, MK3D, MKV, MP4, MPEG, MPG, MTS, TS, TTS, VOB, WMV

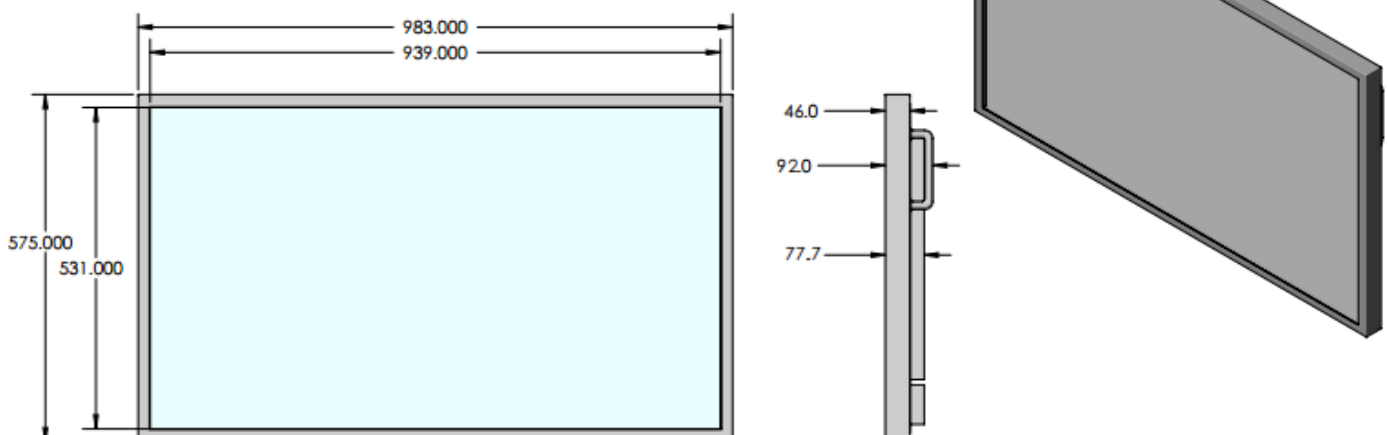

Issue date 2018-07-16

Version: 1.0

UPC: 685417534784

© 2018 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com