


Analog TBC's and Distribution Amplifier

All TBC's re-generate sync. signals to stabilize the video. Frame synchronization with full frame memory. Wide bandwidth, Y/C in 4.5MHz, composite 3.5MHz, Low noise, S/N ratio > 50 dB. Wide bandwidth, 8-bit video resolution, 4:2:2 sampling rate
No external genlock input.



TBC-100

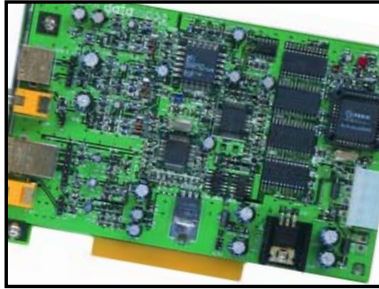

TBC-1000



TBC-3000

	TBC 100	TBC 1000	TBC 3000	TBC 4000	TBC 6000	TBC 7000
FITS IN PC	YES					
BUILT IN VIDEO AND AUDIO DA		YES				
NTSC/PAL AUTO DETECT	YES	YES				
COMPOSITE VIDEO I/O	YES	YES	YES	YES	YES	YES
S-VIDEO I/O	YES	YES	YES	YES	YES	YES
CHANNELS	1	1	2	4	3	3
CHROMA KEY 16 COLORS/15 STEPS					1	2
VIDEO LEVEL CONTROLS					YES	YES
COLOR BAR & PATTERN GENERATOR			YES	YES	YES	YES
FREEZE FRAME					YES	YES
VOLTAGE	5/12 VDC	12 VDC	9 VDC	9 VDC	9 VDC	9 VDC
POWER SUPPLY INCLUDED		YES	YES	YES	YES	YES



VP-299 ANALOG AUDIO & VIDEO DISTRIBUTION AMPLIFIER

One in and four out
Stereo audio pairs
S-Video
Composite video