


TLM-70 7" DV Input LCD Monitor

The TLM-70 is a show anything - go anywhere 7" LCD display. It operates on 12VDC and has an included 110/220V supply. NTSC or PAL, 0 IRE or 7.5 IRE switch. The built in DV to analog converter will let you connect additional monitors or test instruments. You can use the TLM-70 as a client preview monitor, an output monitor for the SE-800 or as a portable monitor.

VIDEO INPUTS	1394 DV-25, COMPOSITE VIDEO
VIDEO OUTPUTS	1394 DV-25, COMPOSITE VIDEO (LOOPED OR CONVERTED FROM DV)
VIDEO CONTROLS	FLIP, 4:3 ASPECT, 16:9 ASPECT, MIRROR IMAGE, SOURCE SELECT, BRIGHTNESS, CONTRAST, COLOR, TINT
AUDIO INPUTS	UNBALANCED RCA, AUDIO IN THE DV STREAM
AUDIO OUTPUTS	UNBALANCED RCA, AUDIO IN THE DV STREAM, EARPHONE, 1W ADDITIONAL SPEAKERS
AUDIO CONTROLS	EARPHONE & SPEAKER LEVEL

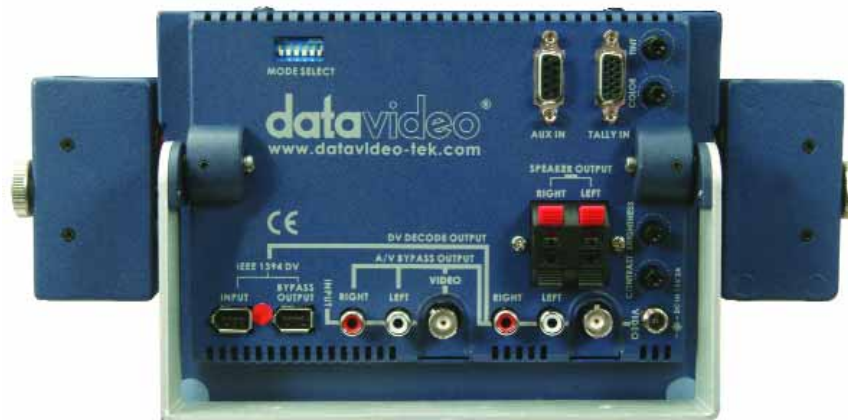

TLM-70

Unit Dimensions/Weight/Power, etc.

Width: 7.5 inches, 190.5 mm, **Depth:** 2.5 inches, 63.5 mm

Height: 5.5 inches, 139.7 mm, **Net Weight:** 3.5 lbs, 1.8 kgs (with speakers)

Brightness: 300 nits, **Aspect Ratio:** 4:3 and 16:9 Selectable, **Resolution:** 480 x 234 pixels

Power: 12 volts, 20 watts, 110/220 volt supply included.



Optional Carrying Case



Removable Sunshade Included



Tilting Handle

