


$\begin{array}{c} \text{MTC-48TRx12} & \text{Tile Rail for} \\ 4' \times 4' & \text{Ceiling Tiles} \end{array}$

Professional Series

Key Features:

- Accessory tile rail for installing many of JBL's ceiling loudspeakers into 4 ft by 4 ft (1200 x 1200 mm; 48 x 48 inch) ceiling tiles in suspended ceiling applications.
- ▶ Can be used with any JBL ceiling speakers having the *C-ring/tile-rail* mounting system. Includes (at product release):
 - Control 24C/CT Micro & 24CT MicroPlus
 - Control 24C/CT, 26C/CT, 19CS/CST
 - Control 47C/T, 47LP, 47HC, 40CS/T, 42C
 - Control 226C/T
 - 8124/8128
 - Not for JBL speakers that install with tile bridges (such as CSS Series, 8138, C227C/CT, C300 Series models). Check with JBL Professional Customer Service for most up-to-date compatibility list.
- ▶ Inverted V-groove provides support to the tile rail grid in case of tile failure while reducing vibration transfer to – and rattling from – ceiling tile grid system.
- ▶ 1.2 mm (0.05 in) metal thickness provides the additional support required by the long span.
- Multiple C-ring mounting holes. Additional hole locations drillable by installer.
- ▶ One MTC-48TRx12 is a pack of 12 tile rails, enough for 6 speakers (2 per speaker).

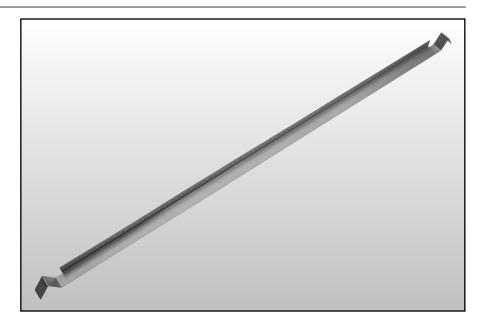


Specifications:

1	
Material:	1.2 mm (0.05 in, 18 gauge) galvanized steel, SECC.
C-Ring Mounting Holes:	30 holes; additional hole locations drillable by installer.
Dimensions:	27 mm (1.1 in) tall x 30 mm (1.2 in) wide x 1267 mm (49.9 in) total length to extend beyond tile grids. 1219 mm (48.0 in) between top of inverted v-grooves, to line up with tile grids.

JBL continually engages in research related to product improvement. Changes introduced into existing products without notice are an expression of that philosophy.

49.9

Dimensions:

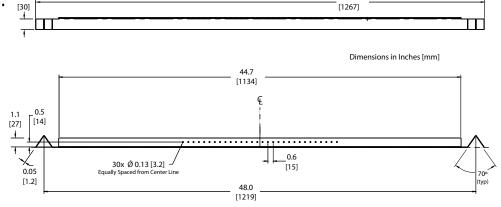

Dimensions in inches (mm)



JBL Professional 8500 Balboa Boulevard, P.O. Box 2200 Northridge, California 91329 U.S.A. © Copyright 2012 JBL Professional