

ATEM 2 M/E Broadcast Panel



The incredible ATEM 2 M/E Broadcast Panel has the power for the most complex live broadcast events and it's perfect when you have the space for a large panel and need all the control at your fingertips. The ATEM 2 M/E Broadcast Panel features an amazing design that not only looks incredible, but perfectly positions all controls just where you need them for the ultimate creativity on complex multi layer live production. The ATEM 2 M/E Broadcast Panel connects via ethernet and includes loop thru for your media management computer.

\$15,405


Connections

Ethernet

2 x 10/100/1000 BaseT with loop output for additional control panels or computers.

Software Updates

1 x USB for firmware updates.

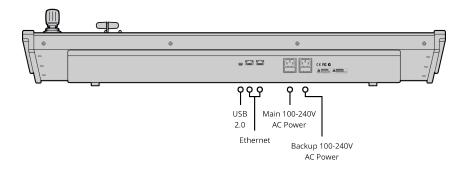

Product Specifics

Direct Cross Points

20

Shifted Cross Points

40

Crosspoint Button Type

Tri-Color LED.

Crosspoint Label

High Contrast RGB Bitmap.

Next Transition Selectors BKG, Key 1 - Key 2 (per M/E).

On-Air Indicator

8

Power Status Indicators

4

DSK Transition Selectors Auto, Cut, Tie/Preview.

Preview Transition

2

Transition Rate Displays

3 Axis Joystick

LED Menu Display

Destination Bus

Numeric Keypad

2

2

2

1

1

Menu Control

Source Select Bus

Multi Control Buttons

24 x LCD Bitmap Buttons.

Dedicated Macro Buttons

10

Fader Bar

Software

Software Applications

ATEM Software Control Panel.

Operating Systems



Mac 10.12 Sierra, Mac 10.13 High Sierra or later.



Windows 8.1 or Windows 10.

Power Requirements

2 x Internal 100 - 240V AC.

Power Supply

Yes

Redundant Power

Power Usage

70W

Physical Specifications



Environmental Specifications

Operating Temperature

0° to 40° C (32° to 104° F)

Storage Temperature

-20° to 60° C (-4° to 140° F)

Relative Humidity

0% to 90% non-condensing