

SPEKTACL

Not just a Show. The Show.


Some people—and things—just don't do subtle. Enter SpektACL™. SpektACL™ creates stunning aerial impact with 10x 4° super bright 3W CREE® warm white LEDs @ 2600K. Plus, 60x 5050SMD RGB "background" LEDs create massive foreground appeal. ALL of SpektACL™'s LEDs are individually pixel mappable, and it's RGB pixel matrix effortlessly belts out full-bar color fades, changes and show-stopping chase effects.

SpektACL™ offers easy-to-use built-in auto programs, sound active mode, and is easily controlled using DMX-512, Art-Net, Arkaos® Kling-Net® or directly using it's easy-to-use 4-button LCD control panel. SpektACL™ is well connected, too, thanks to onboard RJ45 Ethernet data connections, powerCON®-compatible AC in/out and 3/5-pin DMX in/out jacks.

And of course, SpektACL™ is backed by Blizzard's 2-year warranty!

Photometric Data

5° Beam Angle (x10)

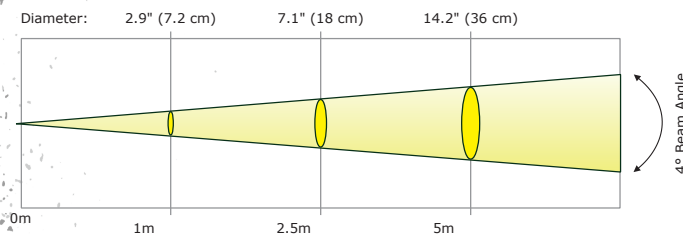

Luminous Intensity:

Beam	1m lux	1m fc	2.5m lux	2.5m fc	5m lux	5m fc
4°	11,745	1,091.1	4,306	400.1	1,624	150.9



Main Features

- 10* 3W CREE® WW LEDs, + 60* 5050SMD RGB LEDs
- Individual pixel control of beams + RGB background pixels
- Super-sharp 4° warm white beams
- Incredible built-in programs for intense, ever changing light shows
- Excellent RGB color consistency while dimming to 0%
- Completely silent, natural convection cooling system
- Backlit alphanumeric 2x16 character LCD display for easy menu navigation
- RJ45 In/out jacks
- 3/5-pin DMX input/output
- Art-Net, Kling-Net, and RDM ready
- PowerCON® compatible AC power input/output
- Standalone, master/slave, auto, sound active modes
- Multifunctional bracket designed for both floor and truss mounting



Optical

10* 3W CREE® LEDs
(2600K WW)
60* 5050SMD RGB LEDs
4° beam angle (x10)



Weight + Dimensions

Width: 30.7" (780 mm)
Depth: 4.1" (103 mm)
Height: 2.9" (73 mm)
Weight: 8 lbs. (3.6 kg)



Control

USITT DMX-512, Art-Net,
Kling-Net, RDM
11/20/47/190-channel
DMX modes
DMX512, M/S, Standalone,
Auto, Sound Active
3/5-pin XLR In/Out
4-button LED control
panel



Power + Current

100-240VAC, 50-60 Hz
Power Consumption:
68W, 0.94A, PF: .94
Fuse: 1.5A, 250V



Warranty

2-year limited warranty,
does not cover
malfunction
caused by damage to
LEDs



blizzardlighting.com

info@blizzardlighting.com

1.866.493.5025

1.866.493.6025