


4x 12G-SDI Input(s)\*  
16-Ch Embedded Audio per SDI Input

*\* SDI connections are bidirectional with support for 12G, 6G, 3G-SDI. For 2K/HD, capture and monitoring can be simultaneous. For 4K/UltraHD with 12G-SDI, capture and monitoring can also be simultaneous. For 8K/UltraHD2 with 12G-SDI, or 4K/UltraHD with 3G-SDI, all four connections must be used for either Input or Output.*

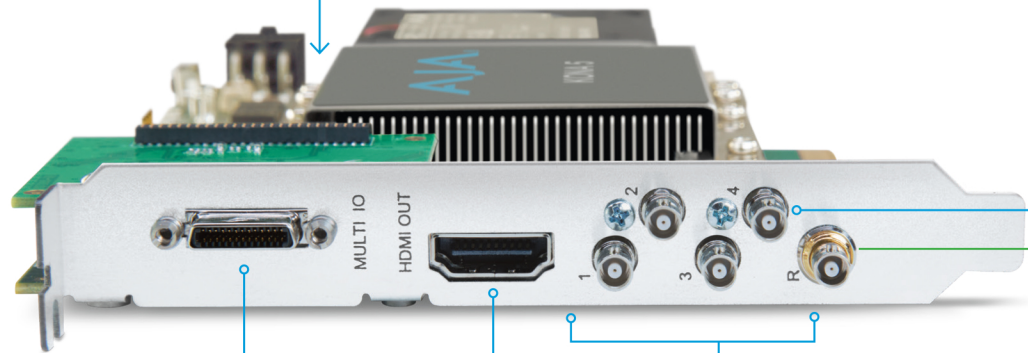

Reference/LTC  
switchable




HDMI 2.0 Output  
8-Ch Embedded Audio

4x 12G-SDI Output(s)\*  
16-Ch Embedded Audio per SDI output



Expanded Connectivity

8-Ch AES/EBU Audio In/Out, RS-422, and LTC In/Out  
via Breakout Cable (supplied)

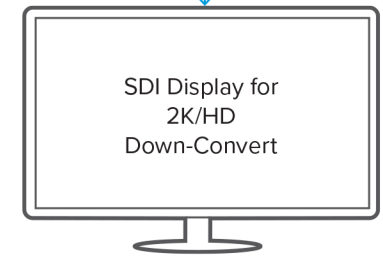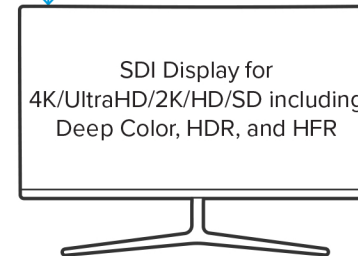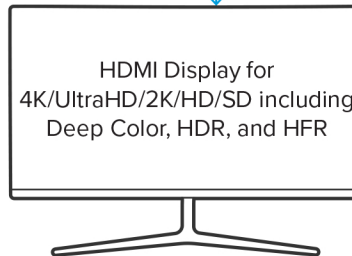

## Workflow Diagram

Connect your digital sources via 12G-SDI to KONA 5 for capture to a wide variety of formats.  
Monitor via HDMI 2.0 output (HDR10, HLG, Dolby Vision\*), and master to destinations using high quality professional SDI outputs, machine control and analog or tri-level reference.  
*\*Dolby Vision integration available when using the AJA SDK.*