

COOLER

Blizzard Lighting, LLC

Phone: 1.866.493.6025 Fax: 1.866.870.0031

Email: info@blizzardlighting.com Website: http://www.blizzardlighting.com

Meet Lil' G™

Small in size, but big on features, Lil G^{TM} is a powerful mini moving spot head, packed with many of the same high quality features found in larger professional moving head fixtures, all for just a fraction of the price!

Under the hood, Lil G[™] has an impressively bright 40-watt LED light source with 9° optics that can produce beautiful beams with 9 gobo patterns + open, 7 colors + white, bi-directional color/gobo rotation, rainbow flow effects, & gobo shake. Then, its fast and precise 540° pan and 220° tilt make it a super aerial performer in a tiny, lightweight package!


Controlling Lil' G™ is a breeze using just 11-channels of DMX, or by using its 4-button LCD control panel, which both offer complete control of every available feature including pan/tilt with fine 16-bit adjustments & speed control, ultrasmooth 16-bit dimming, strobe (1Hz-10Hz), bi-directional color wheel, bidirectional gobo wheel, auto mode, sound active mode, and fixture reset.

The power input connection found on the back side of Lil G™ is industry standard PowerCON® compatible, and DMX 3-pin In/Out jacks + a single clamp mounting bracket round out the many professional features you'll find in this intensively engineered, incredible mini moving head effect fixture!

Main Features:

- · Ultra-bright 40-watt white LED source
- Pan: 540°/Tilt: 220° (8-16 Bit Resolution)
- · 9° beam angle
- 7 color + white color wheel with rainbow effect
- 9 fixed gobos + open w/bi-directional rotation & shake
- Built-in automated programs via master/slave
- Built-in sound activated programs via master/slave
- Ultra-smooth 16-bit dimming system
- Defeatable pan/tilt correction with trim adjustment
- · Intelligent fan cooling system with temperature auto detect
- Easy-to-use 4-button LCD control panel menu
- 1-10Hz/second strobe effects
- · 3-pin male input and 3-pin female output
- · Compact, high quality housing

Luminous Intensity:

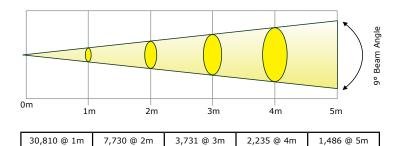



Power:

- AC 110-240VAC, 50/60 Hz
- · Power Consumption: 59W, .79A

Optical:

· Beam Angle: 9 degree

Movement Range:

- · Pan: 540 degree
- · Tilt: 220 degree

Control:

- Protocol: USITT DMX-512
- 11-channel DMX Mode
- Operating Modes: Standalone, Master/Slave, Sound Active
- 3-pin XLR Male / 3-pin XLR Female
- · LCD 4-button control panel

Dimensions:

7.9 x 7.7 x 12.5 inches (20.1 x 19.6 x 7.7 cm)

Warranty:

· 2-year limited warranty, does not cover malfunction caused by damage to LEDs.

7-Color Wheel:

















YELLOW

GREEN

LT. BLUE ORANGE











