




ME 102 ME 104

Quick Guide
Kurzanleitung
Guide de démarrage rapide
Guida rapida
Instrucciones resumidas
Instruções resumidas
Beknopte gebruiksaanwijzing
Krótka instrukcja obsługi
Snabbguide

Kort vejledning
Pikaohje
Γρήγορος οδηγός
Kisa Kilavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
퀵 가이드

SENNHEISER

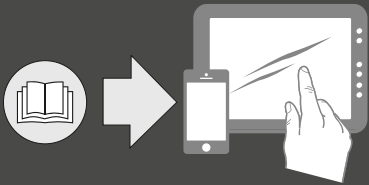

Sennheiser Documentation App



or online at
www.sennheiser.com/download

ME 102_

ME 104_

Sennheiser electronic GmbH & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany, Publ. 08/19, 583975/A01


In the box



ME 102



MZW 102





ME 104



MZW 104



Setup



KA 100*
recommended
for ME 104



KA 100 S*
recommended
for ME 102

System overview

MZW 102



MZW 104



ME 102




ME 104



KA 100...

KA 100 S...


KA 100-4*




KA 100 S-4*



KA 100-P*




KA 100 S-P*




KA 100-5*



KA 100 S-5*




MZQ 102*



MZM 2*/
MZM 10*



ZH 100*



MZQ 02*


* optional accessories

Specifications

	ME 102	ME 104
Pick-up pattern	omni-directional	cardioid
Frequency response	40 – 20,000 Hz	100 – 20,000 Hz
Sensitivity (free field, no load) at 1 kHz	10 mV/Pa \pm 2.5 dB	8 mV/Pa \pm 2.5 dB
Nominal impedance	50 Ω	50 Ω
Min. terminating impedance	1 k Ω	1 k Ω
Equivalent noise level		
A-weighted (DIN IEC 651)	21 dB	38 dB
CCIR-weighted (CCIR 468-3)	33 dB	30 dB
Max. SPL (1 kHz)	127 dB (THD = 1%)	133 dB (THD = 1%)
Supply current	2.6 mA	2.6 mA
Dimensions	\varnothing 6 x 9 mm	\varnothing 6 x 9.5 mm
Weight (without cable)	1 g	1 g


Polar pattern and frequency response

ME 104

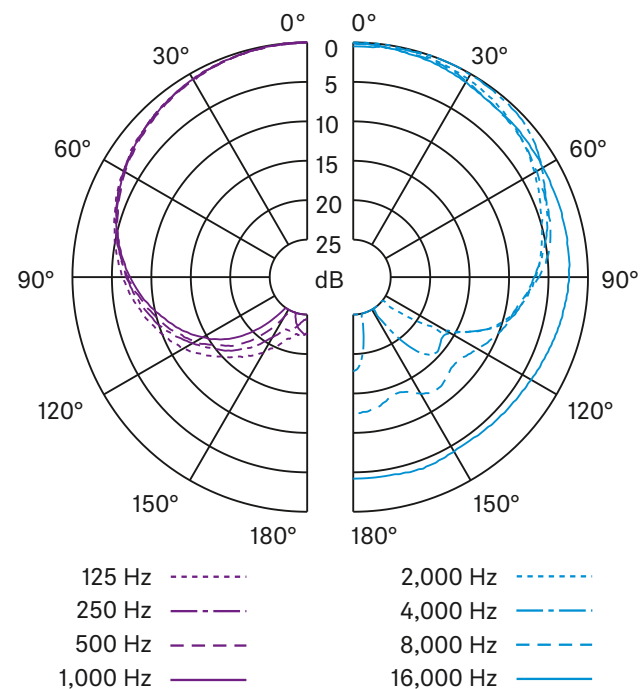


Accessory


MZQ 102*

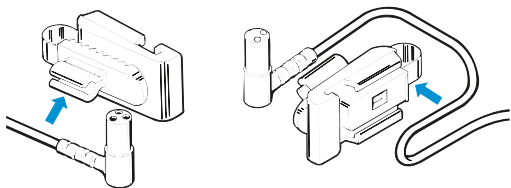


MZM 2* /
MZM 10*



MZQ 02*

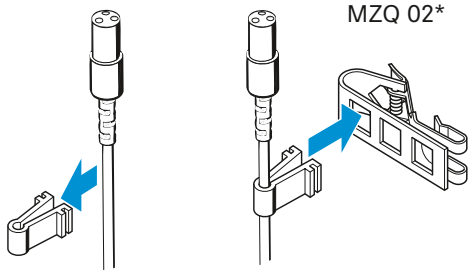


ZH 102*



* optional accessories

ME 104

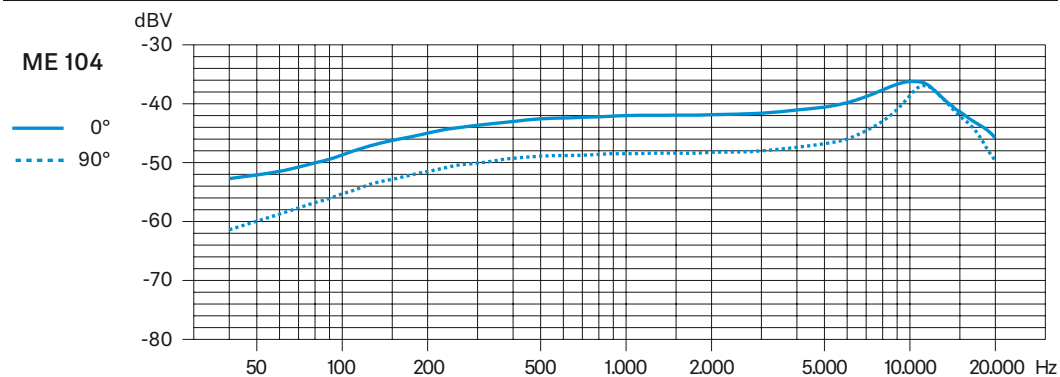

ME 102

