

Advanced Amplification for V-Drums®

Roland's V-Drums, the world's leading electronic drum kits, deserve nothing less than superior amplification. Introducing the PM-30, a new top-of-the-line 2.1-channel advanced speaker system. With 200 watts of Class-D power, a high-performance 12" woofer with tweeter, a pair of 4" satellite speakers, and a proprietary DSP engine, the PM-30 delivers powerful, clear, full-range sound in a package that's cleanly designed and comfortable to transport.



*Actual product appearance may be subject to change.

- 2.1-channel system optimized for V-Drums
- 200W (100W + 50W x 2) power, Class-D amplification
- Carefully tuned for V-Drums via embedded DSP technology
- Subwoofer and Full Range modes for application-specific monitoring performance
- Stereo 3-channel mixer, with versatile input / output options
- 3-band EQ
- Satellite speakers can be mounted on PM-30 or V-Drum rack system
- Casters and side-panel handles for convenient transportation

Full-Range Sound

With its two satellite speakers and matching 12" woofer enclosure with tweeter, the PM-30 delivers a clear, full-frequency sound. The selectable Full-Range and Subwoofer modes, with accompanying value dial, let you customize the amp's low-frequency performance, while the built-in 3-band EQ lets you fine-tune the tone from high to low.

Quad Power Pack

Four Class-D power amplifiers are built into the PM-30 system — 100W, 50W, and 50W — for a total of 200 watts of high-performance impact. It's plenty of power for rehearsals and small- to medium-size venues. Line outputs are provided for tapping into larger systems when needed.

Great for V-Drums®

Roland V-Drum owners will appreciate the PM-30's special V-Drum input, which accepts a single stereo TRS feed from the V-Drums' headphone output. But that's only part of the compatibility story. Roland's engineers carefully optimized the PM-30 for use with V-Drum kits via newly created DSP.




I/O Options

The PM-30 provides a flexible input path with three input channels (both 1/4" and RCA input types are offered) and two sets of outputs (1/4" line outputs (stereo) are provided, plus an additional pair of outputs for the satellite speakers).

Transport & Setup

A solid crossbar spans the top of the PM-30's base unit for convenient carrying; two side handles are provided as well. The two satellite speakers can be clamped onto the crossbar or mounted onto a drum rack (as pictured).

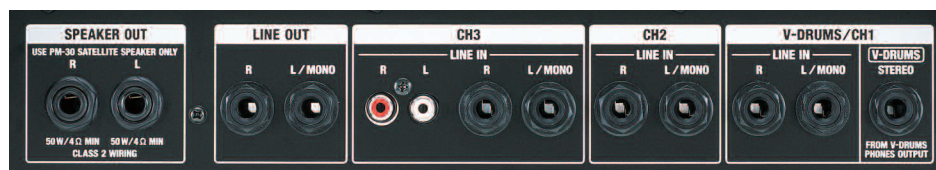

■ Rear Panel



■ **Rated Power Output** 200 W (100 W + 50 W x 2) ■ **Nominal Input Level (1 kHz)** Channel 1 (V-DRUMS / LINE): -20 dBu, Channel 2, 3 (LINE): -20 dBu ■ **Nominal Output Level** LINE OUT: +4 dBu, SPEAKER OUT: 50 W / 4 Ω min ■ **Speakers** 12 inches x 1, TWEETER x 1, 4 inches (Satellite Speaker) x 2 ■ **Controls** V-DRUMS / Channel 1: PUNCH SW, Volume Knob, Channel 2 (LINE): Volume Knob, Channel 3 (LINE): Volume Knob, Woofer Control: Mode Select SW, Volume Knob, MASTER: BASS Knob (Equalizer), MIDDLE knob (Equalizer), TREBLE knob (Equalizer), VOLUME Knob, POWER ■ **Indicator** POWER ■ **Connectors** V-DRUMS / Channel 1: V-DRUMS INPUT JACK (stereo 1/4" phone type), LINE INPUT JACK (1/4" phone type), Channel 2: LINE INPUT JACK (1/4" phone type), Channel 3: LINE INPUT JACK (1/4" phone type), LINE INPUT JACK (RCA PIN type), LINE OUT JACK (1/4" phone type), SPEAKER OUT JACK (1/4" phone type), PHONES JACK (stereo 1/4" phone type) ■ **Power Supply** AC 117 V, AC 230 V, AC 240 V: 50 / 60 Hz, AC 220 V: 60 Hz ■ **Power Consumption** 63W ■ **Dimensions** MAIN UNIT : 451 (W) x 482 (D) x 533 (H) mm (17-13/16" x 19" x 21") (w. CASTER), MAIN UNIT : 451 (W) x 482 (D) x 482 (H) mm (17-13/16" x 19" x 19") (w/o. CASTER), SATELLITE UNIT : 152 (W) x 158 (D) x 209 (H) mm (6" x 6-1/4" x 8-1/4") ■ **Weight** MAIN UNIT: 24.3 kg (53 lbs 10 oz) (w. CASTER), MAIN UNIT: 23.6 kg (52 lbs 1 oz) (w/o. CASTER), SATELLITE UNIT: 2.2 kg / 1 pc. (4 lbs 14 oz / 1 pc.) (w/o. STAND) ■ **Accessory** STAND BAR x 2, CLAMP x 2, SPEAKER CABLE (3.5m) x 2, CASTER x 4, Owner's Manual

type), PHONES JACK (stereo 1/4" phone type) ■ **Power Supply** AC 117 V, AC 230 V, AC 240 V: 50 / 60 Hz, AC 220 V: 60 Hz ■ **Power Consumption** 63W ■ **Dimensions** MAIN UNIT : 451 (W) x 482 (D) x 533 (H) mm (17-13/16" x 19" x 21") (w. CASTER), MAIN UNIT : 451 (W) x 482 (D) x 482 (H) mm (17-13/16" x 19" x 19") (w/o. CASTER), SATELLITE UNIT : 152 (W) x 158 (D) x 209 (H) mm (6" x 6-1/4" x 8-1/4") ■ **Weight** MAIN UNIT: 24.3 kg (53 lbs 10 oz) (w. CASTER), MAIN UNIT: 23.6 kg (52 lbs 1 oz) (w/o. CASTER), SATELLITE UNIT: 2.2 kg / 1 pc. (4 lbs 14 oz / 1 pc.) (w/o. STAND) ■ **Accessory** STAND BAR x 2, CLAMP x 2, SPEAKER CABLE (3.5m) x 2, CASTER x 4, Owner's Manual

* 0 dBu= 0.775 Vrms

* The specifications are subject to change without notice.