



BACK BOX AND TILE BRIDGE

INSTALLATION INSTRUCTIONS BBF-100 & TBF-100

Description



The TOA BBF-100 Back Box and TBF-100 Tile Bridge are designed for easy installation with the TOA model F-101C(M) and F-121C(M) speakers.

Safety precaution

If the ceiling material is not strong enough to support the speaker assembly, including the back box and tile bridge, suspend the assembly directly from a ceiling beam or other substantial structural member.

NOTICE


For sheetrock pre-construction installation, the TBF-100 Tile Bridge must be installed at the same time as the BBF-100 Back Box.

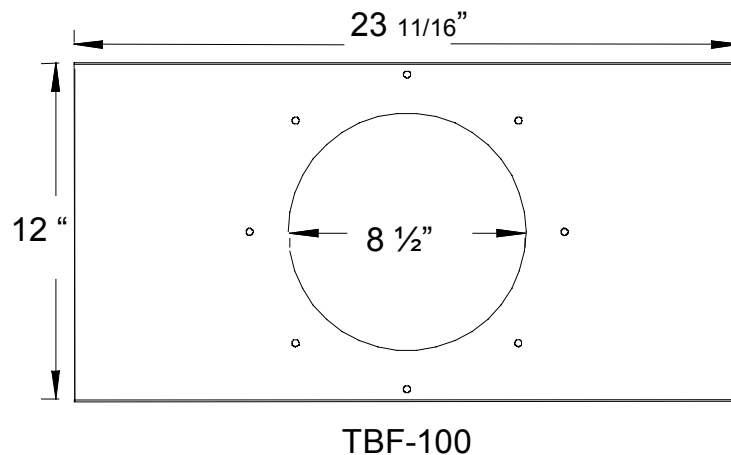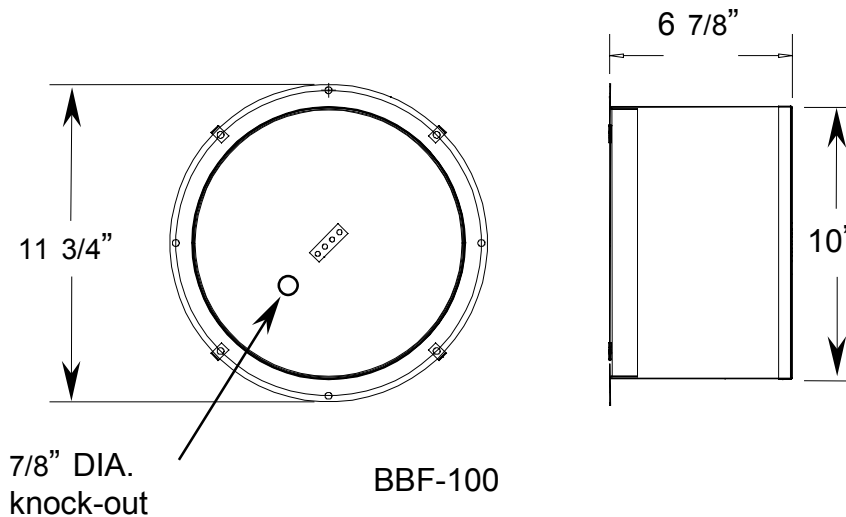

NOTICE


For sheetrock pre-construction installation, the TBF-100 Tile Bridge must be installed at the same time as the BBF-100 Back Box.

1. Attach the TBF-100 to the BBF-100 using the screws provided and install the complete assembly at the desired speaker location.

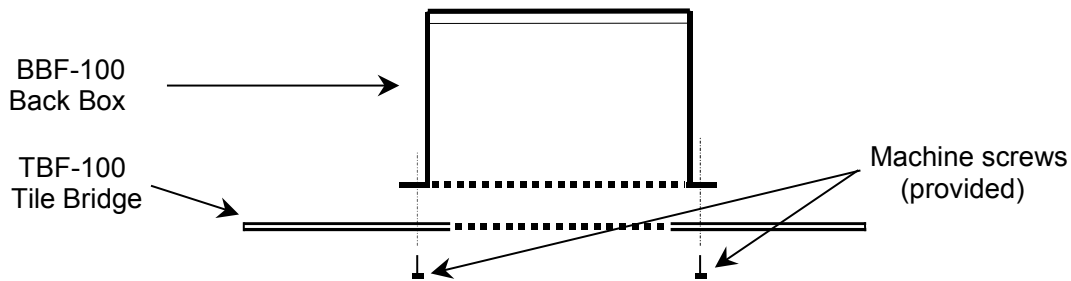

2. Using the template provided with the F-101/121C(M) speaker assembly, cut the speaker assembly opening in the ceiling material.

NOTE: speaker opening diameter

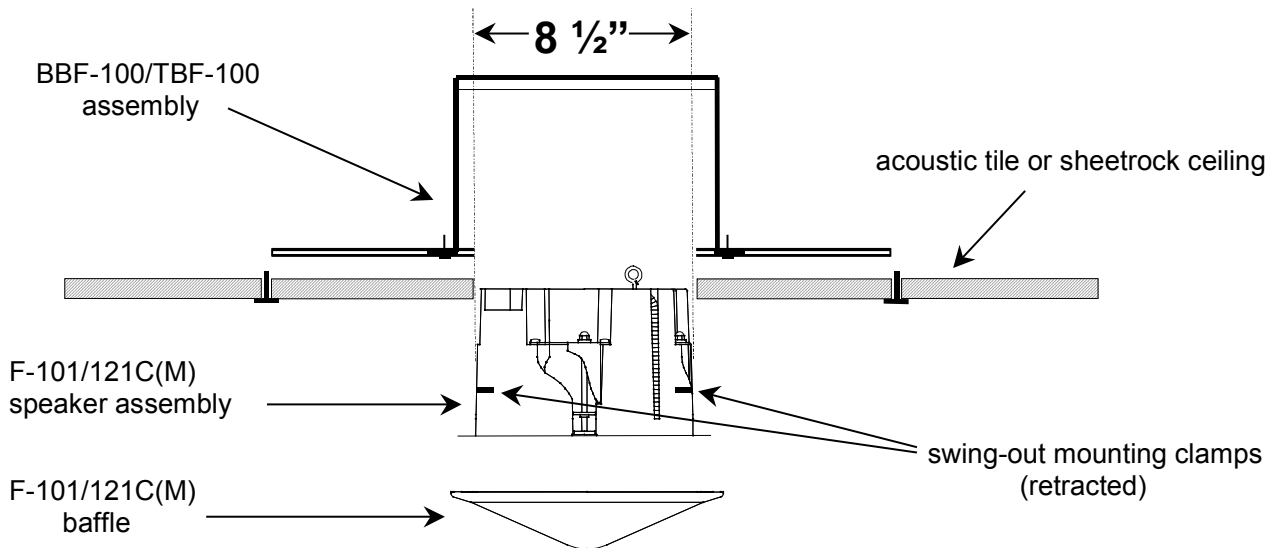

3. Following the instructions provided with the F-101/121C(M) speaker assembly, connect the speaker wiring, then install the speaker assembly and baffle.

