

POWERPLAY

P16-I

16-Channel 19" Input Module with Analog and ADAT* Optical Inputs



- Converts 16 analog inputs into 24-bit digital audio to be transmitted via standard CAT5e cable
- 2 x 8-channel ADAT optical inputs with auto detect and priority select
- 16 balanced, high-headroom TRS audio inputs
- State-of-the-art 24-bit A/D converters for premium audio quality
- 4-position gain switch per channel
- Digital inputs support 44.1 and 48 kHz sample rates
- Ultra-low system latency of less than 1 millisecond
- Signal Present and Clip LEDs per channel plus ADAT status LEDs
- Standard CAT5e connection delivers power and signals for up to 6 Personal Mixers
- 6 ULTRANET expansion network connectors (RJ45)
- Internal autorange power supply for maximum flexibility (100 – 240 V~), noise-free audio, superior transient response plus low power consumption for energy saving
- 3-Year Warranty Program*
- Designed and engineered in Germany

The POWERPLAY P16 system is the easy and affordable way to give live or recording musicians/vocalists what they really want – “more me!” Part of the P16 Personal Monitoring System, the P16-I input module can be used with any analog source, and convert up to 16 analog inputs into 24-bit digital audio to send to your **P16-M** Personal Monitoring Mixers. The P16-I is also equipped with ADAT optical inputs that auto-detect and give priority to incoming signals.



Fast and easy to set up, a basic system can be installed and configured in a matter of minutes – and the system can be expanded to adapt to changing needs. The POWERPLAY P16 Personal Monitoring System puts total control of the monitor mix into the artist’s hands, and when they can hear exactly what they want and need to hear – their best performance is unleashed!

POWERPLAY

P16-I

16-Channel 19" Input Module with Analog and ADAT* Optical Inputs



ADAT-Ready

The P16-I includes a 2 x 8-channel ADAT optical input with auto detect and priority select for use with our existing ADAT equipment. Additionally, 16 balanced, high-headroom TRS audio inputs can be employed to send audio from analog outputs to your P16-Ms. You can choose from 4 gain positions per channel via a convenient onboard switch, and visually monitor by means of the status LEDs on each channel. Sample rates of 44.1 or 48 kHz are supported by the digital inputs, providing ultra-low latency of less than 1 millisecond. Standard Cat 5e cabling delivers power and signals for up to 6 P16-M Personal Monitoring Mixers, or you can use the included external supplies with each P16-M. Plus, the P16-I features an internal auto-ranging power supply for maximum flexibility (100 – 240 V~), noise-free audio, superior transient response and low power consumption.

ULTRANET – Seamless Integration

The world-renowned engineers at [KLARK TEKNIK](#), [MIDAS](#), [TURBOSOUND](#) and [BEHRINGER](#) have all come together to create something truly innovative that will change live and studio workflow forever – ULTRANET. This revolutionary technology seamlessly transmits up to 16 independent channels of 24-bit digital audio and control data via a single CAT5 cable between compatible digital devices – including mixers, I/O stage boxes, powered loudspeakers and personal monitoring systems. Advantages realized through ULTRANET digital networking, versus traditional analog methods: audio signals are impervious to Radio Frequency Interference (RFI); signal crosstalk is eliminated; and ease of setup translates directly into significant time saved during installation. ULTRANET effectuates a powerful digital eco-system that gives you unparalleled control over every element of your audio production environment from one convenient location.



In-Ear Monitor Systems

POWERPLAY

P16-I

16-Channel 19" Input Module with Analog and ADAT* Optical Inputs



Easy Installation

A basic installation consists of one P16-I Input Module, which connects to the main mixing console and up to six P16-M Personal Mixers, creating a system big enough to equip a typical recording studio, small to medium-sized band or worship team. You'll also need a few standard audio and Cat 5e cables. The optional P16-MB mounting bracket allows the P16-M Digital Personal Mixer to be attached to any standard microphone, music or drum stand. As many as six P16-D Digital ULTRANET Distributors can be added to your system to accommodate up to forty-eight P16-M Personal Mixers

Extraordinary Value

The POWERPLAY P16 Personal Monitoring System puts total control of the monitor system where it belongs – in the hands of the performers, freeing up the engineer to sculpt the perfect front-of-house mix. By putting dynamic control over virtually all elements (Volume, Pan, Solo & Mute) of up to 16 input signals within each performer's reach, the P16 Personal Monitoring System provides the easy and affordable way to give them exactly what they want – "more me!" Check the P16-I out today – and experience the ultimate in live and studio personal monitoring.



You Are Covered


We always strive to provide the best possible Customer Experience. Our products are made in our own MUSIC Group factory using state-of-the-art automation, enhanced production workflows and quality assurance labs with the most sophisticated test equipment available in the world. As a result, we have one of the lowest product failure rates in the industry, and we confidently back it up with a generous 3-Year Warranty program.

In-Ear Monitor Systems

POWERPLAY

P16-I

16-Channel 19" Input Module with Analog and ADAT* Optical Inputs

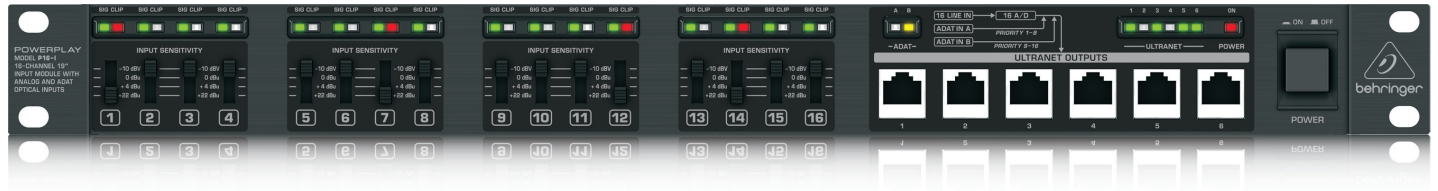


In-Ear Monitor Systems

POWERPLAY

P16-I

16-Channel 19" Input Module with Analog and ADAT* Optical Inputs

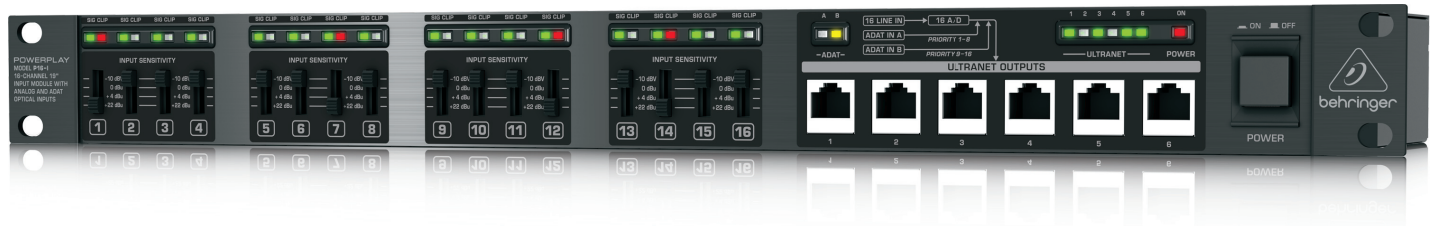

For service, support or more information contact the BEHRINGER location nearest you:

Europe
MUSIC Group Services UK
Tel: +44 156 273 2290
Email: CARE@music-group.com

USA/Canada
MUSIC Group Services NV Inc.
Tel: +1 702 800 8290
Email: CARE@music-group.com

Japan
MUSIC Group Services JP K.K.
Tel: +81 3 6231 0454
Email: CARE@music-group.com

MUSIC Group accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNØY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and DDA are trademarks or registered trademarks of MUSIC Group IP Ltd.
© MUSIC Group IP Ltd. 2016 All rights reserved.

