


4K Wireless Display & Presentation System

QuickCast Pro-4K



Easily broadcast 4K sources wirelessly

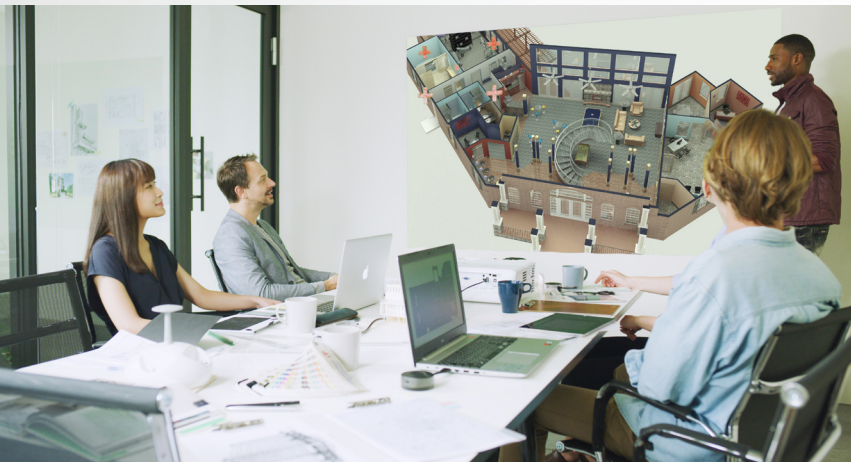

Easily share content from HDMI sources wirelessly via the Optoma Quickcast Pro. Simply connect the QuickCast Pro receiver to an HDMI input and plug the HDMI transmitter into the source and begin wirelessly transmitting office documents, presentations, videos and digital content with the click of a button.

The HDMI transmitter features an integrated battery with up to 6 hours of battery life for crystal clear digital video and presentations without being tethered to a power adapter. Operating on 802.11ac MIMO technology on a 5 GHz frequency ensures maximum connection stability with minimal interference signal interference up to 30-feet away.

SUPPORTED DEVICES

PC	Windows 7, 8, 8.1 & 10
Mac	Mac OS X 10.11.x or higher
iOS	iOS 11.x or higher (iPhone, iPad and iPad Pro)
Android	Android 6.x or higher (smartphones and tablets)
Devices	UHD Blu-ray, Blu-ray players, FireTV, AppleTV, Roku, Chromecast and other HDMI devices (streaming sticks require male-to-male HDMI coupler).
Protected Content Support	Netflix, Hulu, Vudu, HBO Go, Amazon Prime Video and other protected digital content

TECHNICAL SPECIFICATIONS

Native Resolution	4K UHD (3840 x 2160)
Maximum Resolution	4K UHD (3840 x 2160)
Wireless Display Features	Screen mirroring, side-by-side, Samsung Dex
EDID	Auto EDID
Audio	2-channel PCM (stereo)
Video Encoder & Decoder	H.264
Latency	250ms
Operating Room Temperature	41–104°F (5–40°C), 85% max humidity
Power Supply	AC input 100-240V, 50-60Hz, auto-switching

HDMI TRANSMITTER SPECIFICATIONS

Connectivity	HDMI 1.4 (HDCP 1.4)
Wireless Display Technology	802.11ac MIMO (5 GHz)
Power Source	USB-C (5V, 2-amps) Internal battery
Power Consumption	550mA
Battery Life	6 hours
Battery Charge Time	4 hours
Battery Capacity	3500mAh

HDMI RECEIVER SPECIFICATIONS

Connectivity	HDMI 2.0 (HDCP 2.2)
Wireless Display Technology	802.11ac MIMO (5 GHz)
Power Source	DC power adapter (5V, 2-amps)
Power Consumption	750mA
Receiving Distance	30ft (10M)

PHYSICAL SPECIFICATIONS

Weight	HDMI receiver: 2.2 oz. HDMI transmitter: 4.3 oz.
Dimensions (W x H x D)	HDMI receiver: 2.8" x 0.9" x 6.7" HDMI transmitter: 2.8" x 1.2" x 6.7"



*Optional cradle accessory available

AVAILABLE BUNDLES & SKUS

QuickCast Pro 4K	SKU	HDMI Receiver	HDMI Transmitter
HDMI Starter Kit	QCP-SK-4K-HDMI	✓	✓
HDMI Receiver	QCP-4K-HDMIRX	✓	
HDMI Transmitter	QCP-4K-HDMITX		✓

Warranty

1-year limited warranty

What's in the Box

Varies by bundle or SKU.

Part Numbers and UPC

HDMI Starter Kit (QCP-SK-4K-HDMI): UPC: 796435 09 156 3

Replacement Receiver/Transmitter and Accessories

HDMI Receiver (QCP-4K-HDMIRX): UPC: 796435 09 153 8
HDMI Transmitter (QCP-4K-HDMITX): UPC: 796435 09 150 7
Cradle accessory (QCP-CRADLE): UPC: 796435 09 158 3

Optoma.com



Copyright © 2019 Optoma Technology, Inc. All specifications subject to change at any time.
*Optional cradle accessory sold separately. 12112019