

Install

VSX 8.2BP-WH

Twin 8" Compact Band Pass
Passive Subwoofer for Portable and
Installation Applications (White)



- Compact band pass subwoofer for portable and installation applications
- 400 Watts continuous, 1,600 Watts peak power
- Twin 8" bass drivers for extended low frequency system response to below 40 Hz
- Low distortion dual port design for maximum sound pressure levels
- Ideal for background music playback in clubs, bars, theatres and AV applications
- Internally braced plywood enclosure
- Finished with a hard wearing semi matt white paint finish
- Blanking plate for optional VTH pole mount
- Integral M10 rigging points for ease of installation
- Integrip handles ergonomically integrated into rear of cabinet
- Neutrik speakON* NL4 and barrier strip connectors for input and link output
- 10-Year Warranty Program*
- Designed and engineered in the U.K.

The VSX 8.2BP-WH is a compact dual 8" 1,600-Watt passive band pass subwoofer that is ideally suited for a broad range of speech and music sound reinforcement applications in both fixed, portable, and touring audio systems. VSX 8.2BP-WH's superb low frequency reproduction makes it the perfect choice for deployment in clubs, bars, theatres and AV applications.



Stunning Performance

A dual ported band pass system, the VSX 8.2BP-WH features twin 8" low frequency drivers that provide extended low frequency response to well below 40 Hz – for chest-pounding bass. Fast and accurate transient response enables the VSX 8.2BP-WH Subwoofer to generate copious quantities of tight low end output that is virtually distortion-free.


Install

VSX 8.2BP-WH

Twin 8" Compact Band Pass
Passive Subwoofer for Portable and
Installation Applications (White)

Band Pass Enclosure Design

Band pass enclosures are extremely efficient, creating maximum bass output within a specific frequency range by increasing the acoustic load presented to the driver. The low distortion band pass design utilised in the VSX 8.2BP-WH reinforces the bass musical instrument frequencies, and steep cut-off slopes ensure an effective acoustic transition for use with full-range loudspeakers. A typical application could consist of a VSX 8.2BP-WH providing the low-frequency bass extension for one, or two top cabinets.

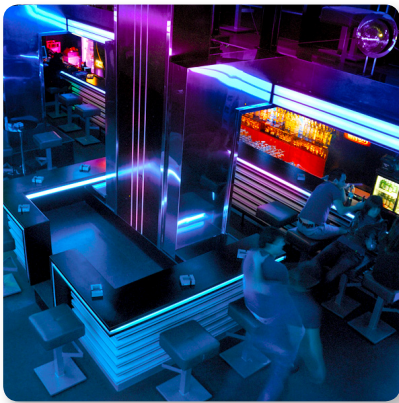

Versatility

VSX 8.2BP-WH Subwoofers can be easily deployed in a multitude of configurations, thanks to the integral M10 rigging points and blanking plate for an optional VTH pole mount. For touring and portable applications, the enclosures also feature our Integrip handles, which are ergonomically integrated into the rear of each cabinet.

Construction and Connectivity

Finished in a hard wearing semi matt white paint, the cabinet is constructed of internally braced plywood and includes a rugged powder coated perforated steel mesh grille backed with reticulated foam. The rear panel connector plate carries Neutrik speakON® NL4 and barrier strip connectors for input and link connections to accommodate additional subwoofer, or satellite full range loudspeakers.



VSX 8.2BP-WH

Twin 8" Compact Band Pass
Passive Subwoofer for Portable and
Installation Applications (White)



You Are Covered


We always strive to provide the best possible Customer Experience. Our products are made in our own [MUSIC Tribe](#) factory using state-of-the-art automation, enhanced production workflows and quality assurance labs with the most sophisticated test equipment available in the world. As a result, we have one of the lowest product failure rates in the industry, and we confidently back it up with a generous [Warranty program](#).

Install


VSX 8.2BP-WH

Twin 8" Compact Band Pass
Passive Subwoofer for Portable and
Installation Applications (White)

Frequency Response Sensitivity 1 W / 1 m

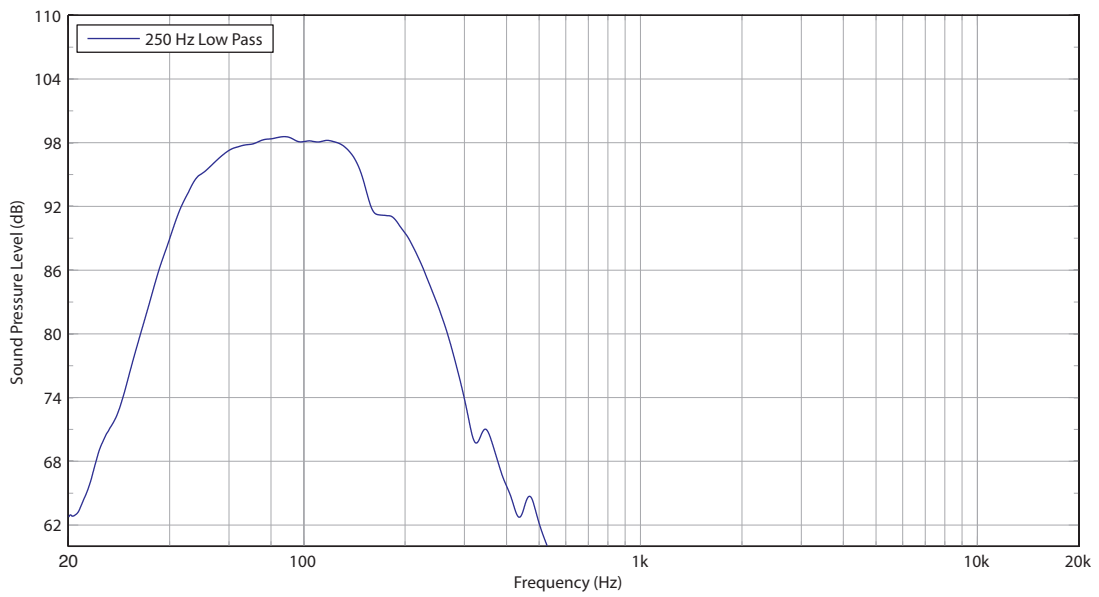

Impedance

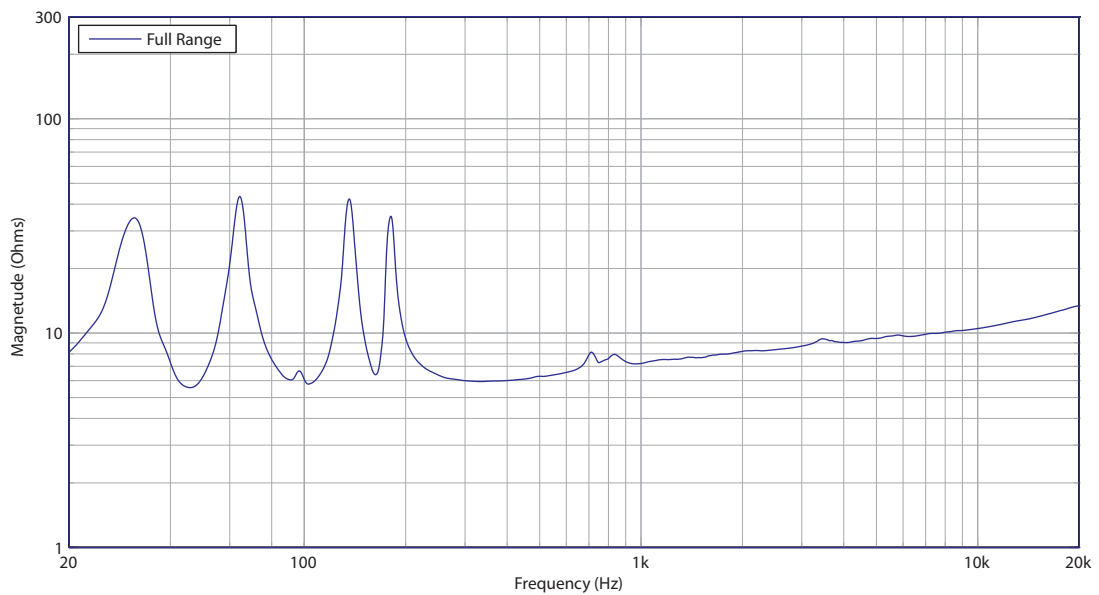


Install

VSX 8.2BP-WH

Twin 8" Compact Band Pass
Passive Subwoofer for Portable and
Installation Applications (White)

Dimensions

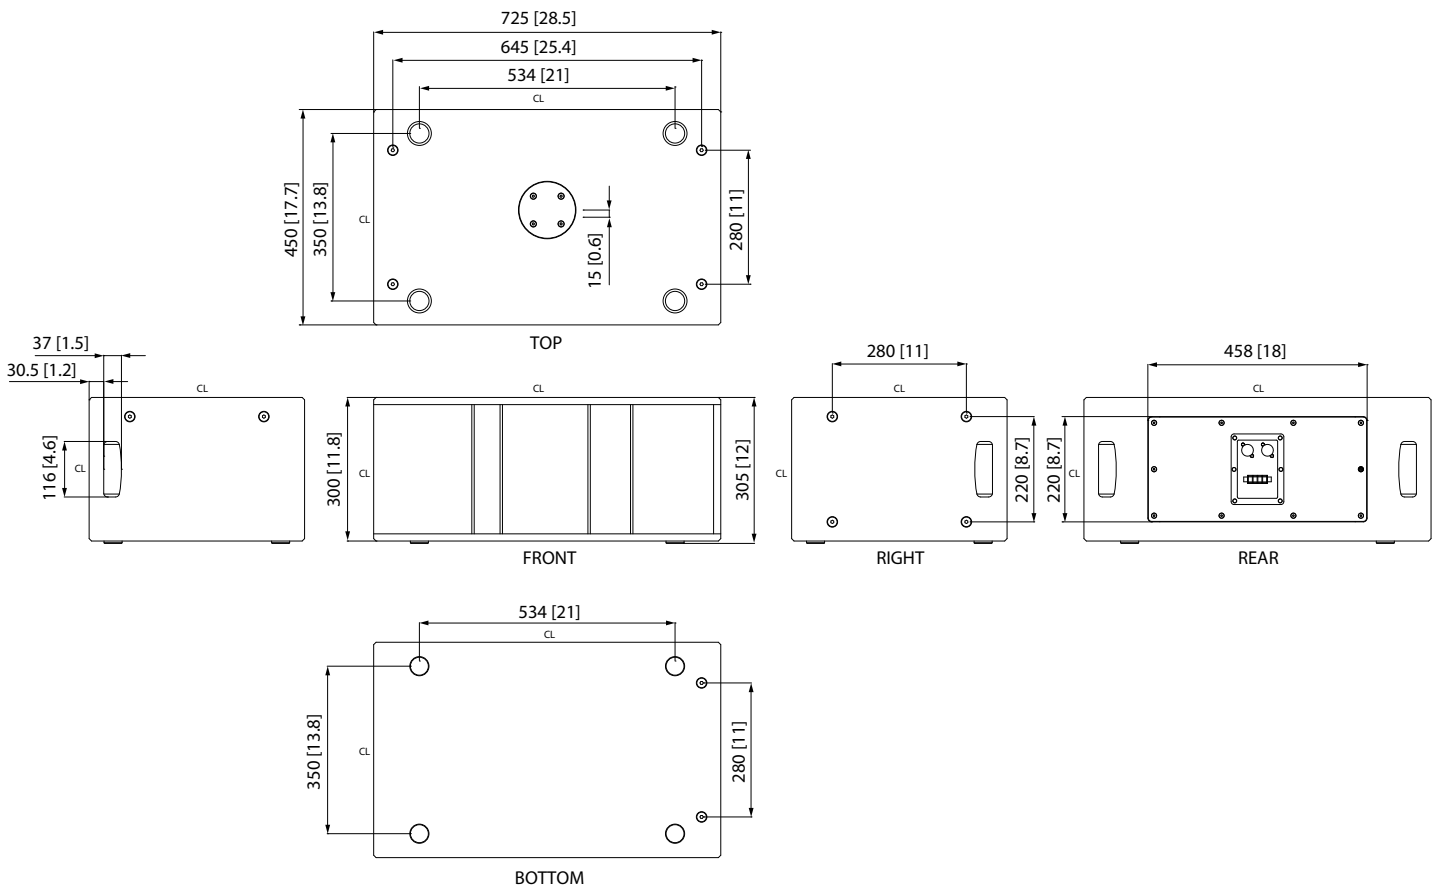

Install

VSX 8.2BP-WH

Twin 8" Compact Band Pass
Passive Subwoofer for Portable and
Installation Applications (White)

Technical Specifications

System

Frequency Response	46 Hz – 160 Hz, ± 3 dB 38 Hz – 200 Hz, -10 dB
Recommended Low Pass Crossover	80 – 150 Hz, 24 dB/Oct
Power Handling (IEC)	400 W continuous, 1600 W peak
Sensitivity	97 dB (1 W @ 1 M)
Maximum SPL	123 dB continuous, 129 dB peak
Impedance	8 Ω
Components	2 x 8" (212 mm) LF driver

Enclosure

Connectors	2 x Neutrik speakON* NL4, 1 x barrier strip terminals
Wiring Parallel	Pins 1+ / 1- input, pins 2+ / 2- link —
Discreet	—
Dimensions H x W x D	306 x 725 x 450 mm (12.0 x 28.5 x 17.7")
Net Weight	24.1 kg (53.1 lbs)
Construction	15 mm ($\frac{5}{8}$ ") plywood
Finish	Semi matt black paint (white optional)
Grille	Powder-coated perforated steel
Flying Hardware	M10 x 8 points


Accessories

Blanking plate for optional VTH pole mount

Install

VSX 8.2BP-WH



Twin 8" Compact Band Pass
Passive Subwoofer for Portable and
Installation Applications (White)

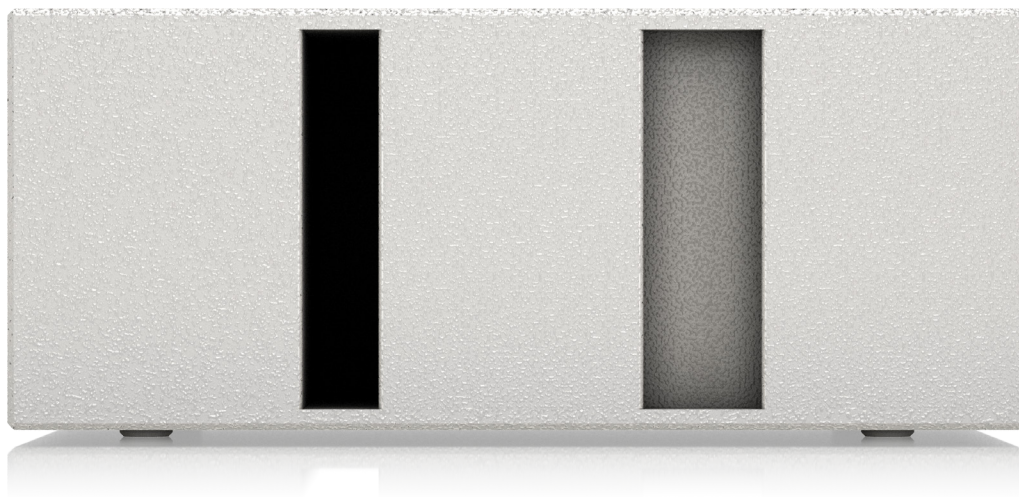

Install

VSX 8.2BP-WH

Twin 8" Compact Band Pass
Passive Subwoofer for Portable and
Installation Applications (White)

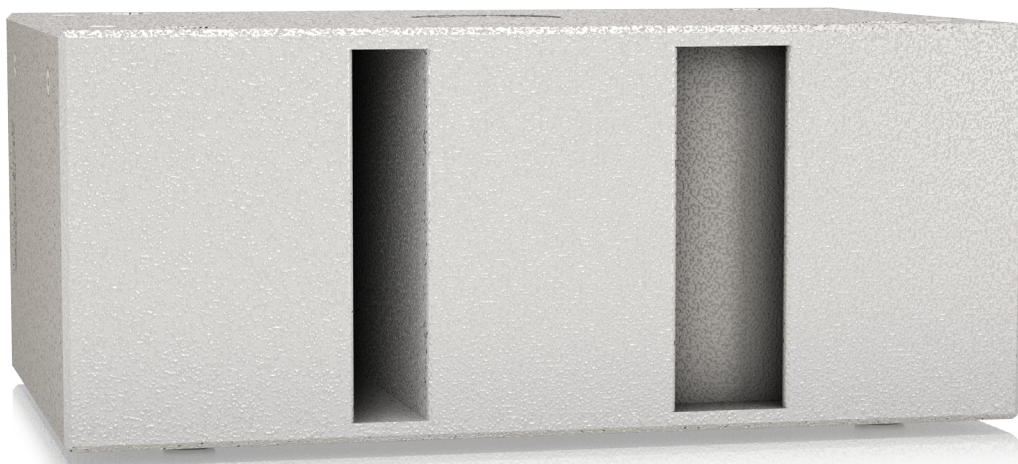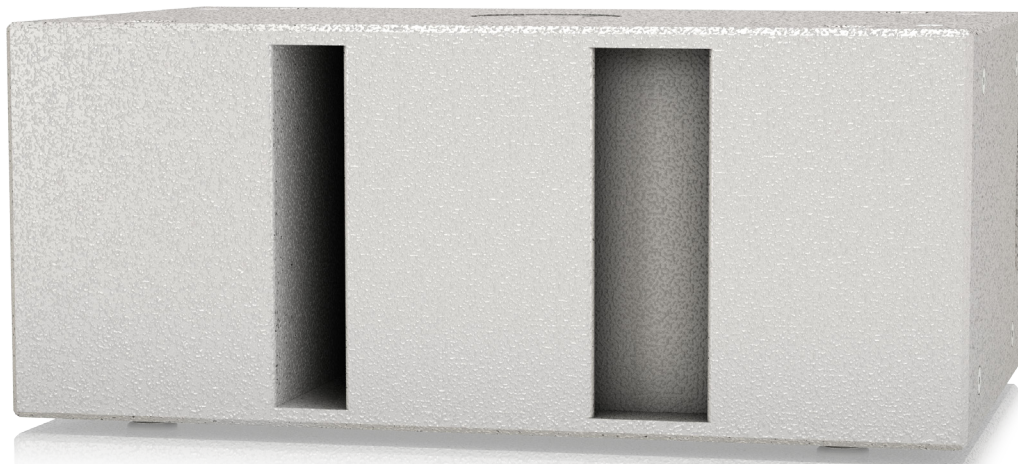

Install

VSX 8.2BP-WH

Twin 8" Compact Band Pass
Passive Subwoofer for Portable and
Installation Applications (White)



For service, support or more information contact the TANNOY location nearest you:

Europe
MUSIC Tribe Brands UK Ltd.
Tel: +44156 273 2290
Email: CARECrea@music-group.com
CAREnte@music-group.com
CARELife@music-group.com

USA/Canada
MUSIC Tribe Commercial NV Inc.
Tel: +1 702.800 8290
Email: CARECrea@music-group.com
CAREnte@music-group.com
CARELife@music-group.com

Japan
MUSIC Tribe Services JP K.K.
Tel: +81 3 6231 0453
Email: CARECrea@music-group.com
CAREnte@music-group.com
CARELife@music-group.com

MUSIC Tribe accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNNOY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and COOLAUDIO are trademarks or registered trademarks of MUSIC Tribe Global Brands Ltd. © MUSIC Tribe Global Brands Ltd. 2018 All rights reserved.

TANNOY