



# SPECIFICATIONS ASR690e

## DESCRIPTION

A bi-amplified (passive mid/high crossover) or tri-amplified 3-way full range system in a rectangular enclosure. Includes 2x 12-in woofers (separated vertically), a horn-loaded 10-in MF cone with Radial Phase Plug™ and a 1.4-in exit/2.5-in voice coil HF neodymium compression driver on a 90° x 45° constant directivity horn.

## APPLICATION

The ASR690e is engineered for use in permanent installations. Optimized subsections provide excellent full range frequency response in a medium format enclosure. The low profile 22.5-in enclosure height is optimized for use in applications where mounting space is limited. Includes comprehensive 3/8"-16 mounting/suspension points. Six year warranty.

Applications include:

Stadiums	Arenas
Performing Arts Centers	Houses of Worship

## PERFORMANCE

### Frequency Response (Hz)

±3 dB	67 Hz to 15 kHz
-10 dB	50 Hz

### Axial Sensitivity (dB SPL, 1 Watt @ 1m)

Passive MF/HF	107
LF	102
MF	109
HF	109

### Impedance (Ohms)

Passive MF/HF	8
LF	4
MF	8
HF	8

### Power Handling (Watts, Continuous)

Passive MF/HF	450
LF	800
MF	400
HF	125

### Recommended High-Pass Frequency

24 dB/Octave	40 Hz
--------------	-------

### Calculated Maximum Output (dB SPL)

Passive MF/HF Peak	139
LF Peak	137
MF peak	141
HF Peak	136
Passive MF/HF Long term	133
LF Long Term	131
MF long Term	135
HF Long Term	130



### Nominal Coverage Angle/-6 dB points (degrees)

Horizontal	90
Vertical	45

## PHYSICAL

Product Group	I	
System Configuration	3-way, full range	
Powering Configuration(s)	Bi-amplified (passive MF/HF) or tri-amplified	
LF Subsystem & Loading	2x 12-in, vented	
MF Subsystem & Loading	1x 10-in cone, Radial Phase Plug™ horn-loaded	
HF Subsystem & Loading	1x 1.4-in exit/2.5-in voice coil neodymium compression driver on constant directivity horn	
Cabinet Type (shape)	Rectangular	
Enclosure Materials	Exterior grade Baltic birch plywood	
Finish	Wear-resistant textured black paint	
Connectors	2 x 6-Contact terminal strip, jumpers used for powering configuration	
Suspension Hardware	(18) 3/8"-16 threaded mounting/suspension points (4 each top, bottom and sides, 2 on back)	
Grille	Powder coated perforated steel	
Dimensions	inches	millimeters
	Height	22.5 572
	Width	41.5 1054
	Depth	22.5 572
Weights	pounds	kilograms
	Net Weight	175 79.6
	Shipping Weight	190 86.5







# SPECIFICATIONS ASR690e

## DIMENSIONAL DRAWING


- ⊙ INDICATES MOUNTING POINT, 3/8-16 THREADED HOLE (PI ANGLE).
- INDICATES MOUNTING POINT, 3/8-16 THREADED HOLE (NUT PLATE).
- ⊕ SYMBOL INDICATES CENTER OF BALANCE.




FRONT

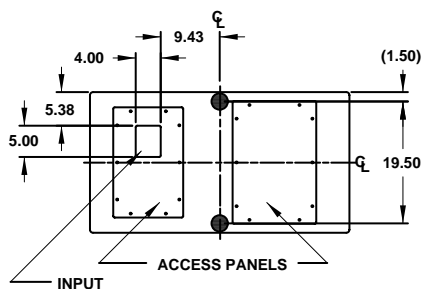

BACK

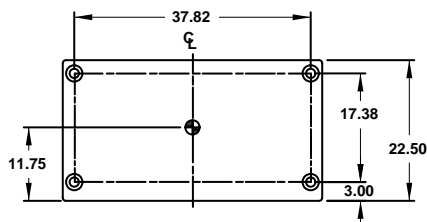

TOP/BOTTOM



LEFT SIDE  
DIMENSIONS APPLY  
TO BOTH SIDES

## A & E SPECIFICATIONS

The bi-amplified or tri-amplified 3-way full range loudspeaker system shall incorporate 2x 12-in LF transducers, a horn-loaded 10-in MF cone with Radial Phase Plug™ and a 1.4-in exit/2.5-in voice coil HF neodymium compression driver.

The LF drivers shall be mounted in slanted baffles and separated vertically. The MF driver shall be loaded into a midrange horn constructed of 1/8-in birch plywood backed with high density polyurethane foam. The HF driver shall be loaded on a constant directivity horn with a nominal coverage pattern of 90° (h) x 45° (v). An internal passive filter network shall provide fourth order acoustical crossover and system equalization between the MF and HF subsystems.

System frequency response shall vary no more than  $\pm 3$  dB from 67 Hz to 15 kHz measured on axis. The mid/high section shall produce a Sound Pressure Level (SPL) of 107 dB SPL on axis at 1 meter with a power input of 1 Watt, and shall be capable of producing a peak output of 139 dB SPL on axis at 1 meter. The low frequency section shall produce a Sound Pressure Level (SPL) of 102 dB SPL on axis at 1 meter with a power input of 1 Watt, and shall be capable of producing a peak output of 137 dB SPL on axis at 1 meter. The mid frequency section shall produce a Sound Pressure Level (SPL) of 109 dB SPL on axis at 1 meter with a power input of 1 Watt, and shall be capable of producing a peak output of 141 dB SPL on axis at 1 meter. The high frequency section shall produce a Sound Pressure Level (SPL) of 109 dB SPL on axis at 1 meter with a power input of 1 Watt, and shall be capable of producing a peak output of 136 dB SPL on axis at 1 meter. The mid/high section shall handle 450 Watts of amplifier power (continuous) and shall have a nominal impedance of 8 Ohms. The low frequency section shall handle 800 Watts of amplifier power (continuous) and shall have a nominal impedance of 4 Ohms. The mid frequency section shall handle 400 Watts of amplifier power (continuous) and shall have a nominal impedance of 8 Ohms. The high frequency section shall handle 125 Watts of amplifier power (continuous) and shall have a nominal impedance of 8 Ohms.

The loudspeaker enclosure shall be rectangular in shape. It shall be constructed of multi-ply, void-free, cross-grain-laminated, exterior grade, Baltic birch plywood and shall employ extensive internal bracing. It shall be finished in wear-resistant, textured black paint. Input connectors shall be 2x 6-contact terminal barrier strips. Eighteen (18) 3/8"-16 threaded mounting/suspension points (4 each top, bottom and sides, 2 on back) shall be provided. The front of the loudspeaker shall be covered with a powder coated perforated steel grille.

The bi-amplified or tri-amplified 3-way full range loudspeaker shall be the EAW model ASR690e.

509137(0)  
5/10/01

Manufacturing tolerances are  $\pm 0.13$  and  $\pm 1^\circ$

