

FUZE PENDANT

The **FUZE PENDANT™** provides powerful illumination for a variety of house and area lighting applications. Crisp whites with a high CRI, plus subtle pastels and powerful pure colors with 16-bit dimming, allow for a wide range of smooth illumination and dynamic effects for any environment. At up to 11,000 total lumens, the FUZE PENDANT is ideal for large areas and high-ceiling applications yet is compact enough to be adaptable to smaller spaces.

P R E L I M I N A R Y



Pendant and optional yoke or recessed ceiling options provide flexibility when finding the ideal mounting position and a variety of lens choices (25, 35, 45, 60 degree) allows for precise light distribution. Industry standard power and DMX connections, plus included terminal block connections for power, emergency battery input and 0-10V control, support multiple permanent or temporary install requirements with a single product design.



KEY FEATURES

- Full Spectrum 230W 5-in-1 LED Array
- 2,000 - 10,000K Color Temperature
- CRI 90 @ 4,000K
- 11,000 Total Lumen Fixture Output
- 45-Degree Lens (included)
- Optional 25, 35, and 60 Degree Lens Available
- Compact Fanless Design
- DMX, RDM, 0-10V and E-FLY Wireless Support
- 48V Emergency Battery Input
- Bare Wire Block Terminal Connections (connectors included)
- Pendant Bracket (included)
- Optional Yoke or Recessed Ceiling Mount Kits Available
- Optional Half and Full Snoot Kits Available

Optional Accessories



Half Snoot Kit



Recessed Ceiling Kit



ELATION FUZE PENDANT | PRELIMINARY Technical Specifications

Specifications subject to change without notice ©Elation Professional 11/22/19

SOURCE

230W 5-in-1 RGBWL (Red, Green, Blue, White, Lime) LED Array
50,000 Hour Average LED Life*

*Test lab conditions. May vary depending on several factors including but not limited to:
Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, Dimming, and Lamp Mode.

PHOTOMETRIC DATA

11,000 Total Lumen Fixture Output
CRI 90 @4,000K
45-Degree Lens (included)

EFFECTS

Color Temperature Control 2,000K - 10,000K
Virtual Color Gels
Dimmer, RGB, RGBWL and HSI Control Options
Variable 16-bit Dimming Curve Modes
High Speed Electronic Shutter and Strobe
DMX and Menu Adjustable LED Refresh Rate Frequency

CONTROL / CONNECTIONS

4 DMX Channel Modes
Standalone and Master Slave Modes
RDM (Remote Device Management)
0-10V Dimming (Current-Sink)
E-FLY™ Internal Extended Range Wireless DMX Transceiver
4 Button Control Panel and OLED Menu Display
Locking 5pin XLR Connector In/Out
Locking IP65 Power Connector Power In
3pin Bare Wire Terminal Block for Power
5pin Bare Wire Terminal Block for 0-10V, DMX
2pin Bare Wire Terminal Block for 48V Emergency Battery Input

SIZE / WEIGHT

Length: 12.5" (318mm)
Diameter: 7.8" (197mm)
Weight: 15.8lbs. (7.2 kg)

ELECTRICAL / THERMAL


AC 100-277V - 50/60Hz
Max Power Consumption 230W
14°F to 113°F (-10°C to 45°C)

APPROVALS / RATINGS

CE | cETLus (pending) | IP20

ORDERING INFORMATION

#FUZ260	FUZE PENDANT (US)
TBA	FUZE PENDANT 20-DEGREE LENS (US)
TBA	FUZE PENDANT 35-DEGREE LENS (US)
TBA	FUZE PENDANT 45-DEGREE LENS (US)
TBA	FUZE PENDANT 60-DEGREE LENS (US)
TBA	FUZE PENDANT YOKE MOUNT KIT (US)
TBA	FUZE PENDANT HALF SNOOT (US)
TBA	FUZE PENDANT FULL SNOOT (US)
TBA	FUZE PENDANT RECESSED CEILING KIT (US)
#1237000225	FUZE PENDANT (EU)
TBA	FUZE PENDANT 20-DEGREE LENS (EU)
TBA	FUZE PENDANT 35-DEGREE LENS (EU)
TBA	FUZE PENDANT 45-DEGREE LENS (EU)
TBA	FUZE PENDANT 60-DEGREE LENS (EU)
TBA	FUZE PENDANT YOKE MOUNT KIT (US)
TBA	FUZE PENDANT HALF SNOOT (EU)
TBA	FUZE PENDANT FULL SNOOT (EU)
TBA	FUZE PENDANT RECESSED CEILING KIT (EU)

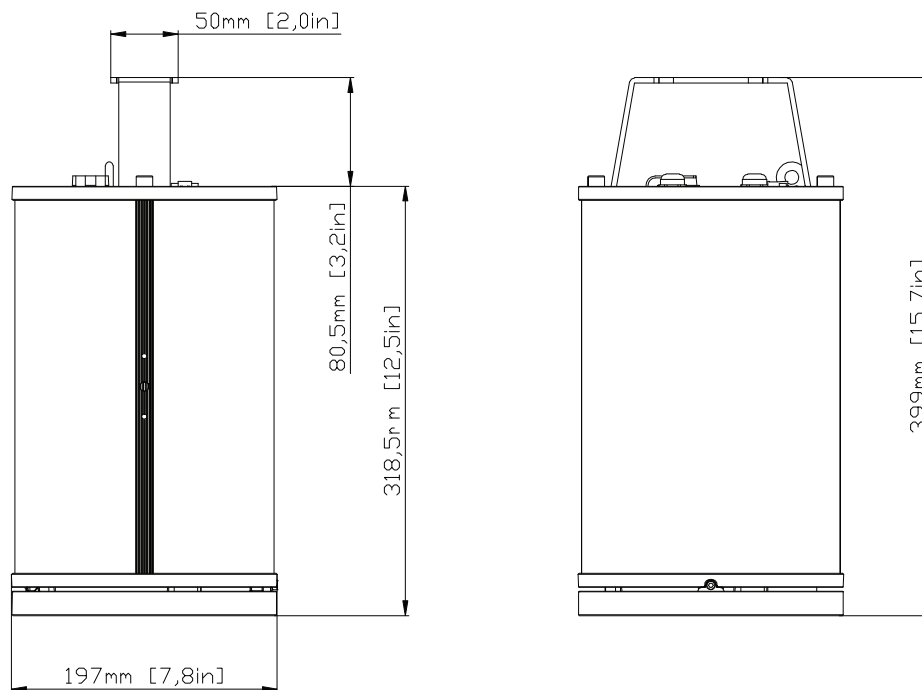

Elation Professional USA
6122 S. Eastern Ave. | Los Angeles, CA, 90040
323-582-3322 | info@elationlighting.com

Elation Professional B.V.
Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | info@elationlighting.eu

Elation Professional Mexico
AV Santa Ana 30 | Parque Industrial Lerma, Lerma, Mexico 52000
+52 (728) 282-7070

*PRELIMINARY DRAWINGS NOT TO SCALE