PERFORMER TPX122M

2 Way 12" Full Range Loudspeaker and Stage Monitor for Portable PA Applications

- 2 way full range loudspeaker and stage monitor for portable PA applications
- 250 Watts continuous,1,000 Watts peak power
- High excursion 12" low frequency driver with low mass voice coil for improved transient response
- Aluminium dome 1" compression driver with extended high frequency reproduction
- Low profile design to maximise audience sight lines
- Low distortion waveguide provides 70° H x 50° V dispersion
- Hard wearing carpet covered 18mm (¾") wood construction
- Rugged powder coated perforated steel mesh grille
- Durable handles for easy lifting and carrying
- Dual angle pole mount for accurate audience coverage
- Neutrik speakON* NL4 connectors for reliable long life operation
- 10-Year Warranty Program*
- Designed and engineered in the U.K.



The 2-way full range TPX122M is a passive 12" 1,000 Watt loudspeaker system that is ideally suited for a wide range of portable speech and music sound reinforcement, including FOH, side fill and monitor applications. Engineered as a standalone 2-way system not requiring any external equalization or filtering, the TPX122M achieves optimal performance when paired with a subwoofer and



TURBOSOUND loudspeaker management systems.

The TPX122M loudspeaker features a high excursion 12" low frequency driver with a low mass voice coil for improved transient response, and an aluminium dome 1" compression driver mounted on a 70° horizontal by 50° vertical low distortion waveguide. All drivers are matched with an internal passive crossover network in a reflex-loaded enclosure.

Covered in hard wearing black carpet, the cabinet is of 18 mm (¾") wood construction – and includes a rugged powder coated perforated steel mesh grille backed with reticulated foam, a dual-angle pole mount socket for use with 35 mm poles/speaker stands to optimise audience coverage, and durable handles for easy transport. The symmetrical wedge angle and high frequency dispersion pattern enable the TPX122M to be utilized as mirrored left/right floor monitors. A side panel connector plate carries Neutrik speakON* NL4 connectors for input and link connections to additional enclosures.



PERFORMER TPX122M

2 Way 12" Full Range Loudspeaker and Stage Monitor for Portable PA Applications



You Are Covered


We always strive to provide the best possible Customer Experience. Our products are made in our own MUSIC Tribe factory using state-of-the-art automation, enhanced production workflows and quality assurance labs with the most sophisticated test equipment available in the world. As a result, we have one of the lowest product failure rates in the industry, and we confidently back it up with a generous Warranty program.




PERFORMER TPX122M

2 Way 12" Full Range Loudspeaker and Stage Monitor for Portable PA Applications

Frequency Response Sensitivity 1 W / 1 m

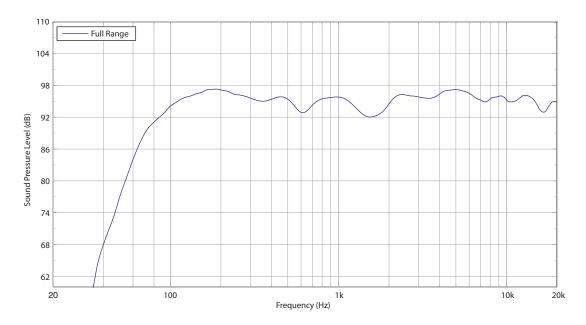

Impedance

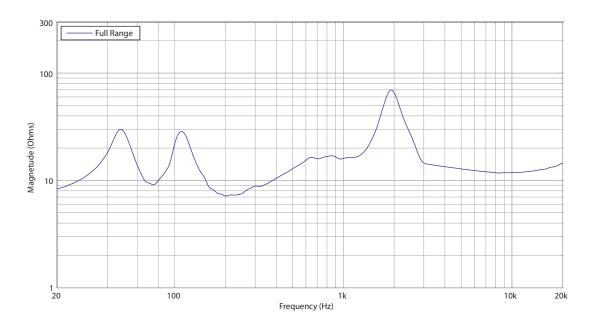





PERFORMER TPX122M

2 Way 12" Full Range Loudspeaker and Stage Monitor for Portable PA Applications

Horizontal Beamwidth

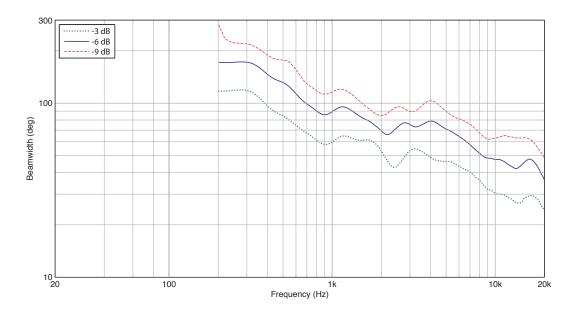

Vertical Beamwidth

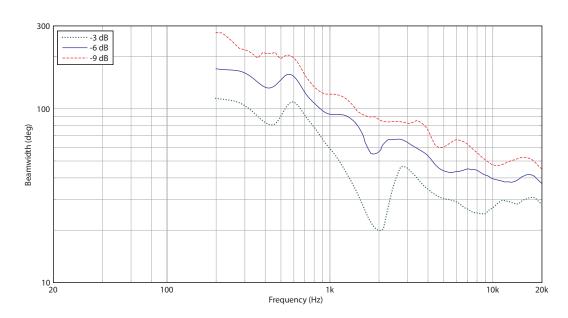






PERFORMER TPX122M


2 Way 12" Full Range Loudspeaker and Stage Monitor for Portable PA Applications


Horizontal Polar Plots
















PERFORMER TPX122M


2 Way 12" Full Range Loudspeaker and Stage Monitor for Portable PA Applications


Vertical Polar Plots














PERFORMER TPX122M

2 Way 12" Full Range Loudspeaker and Stage Monitor for Portable PA Applications

Dimensions

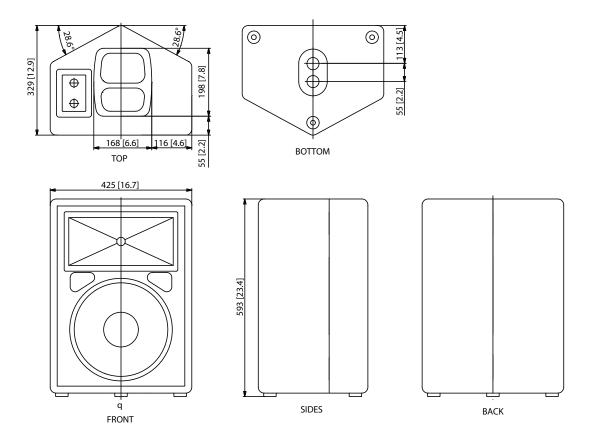



PERFORMER TPX122M

2 Way 12" Full Range Loudspeaker and Stage Monitor for Portable PA Applications

Technical Specifications

System	
Frequency Response	75 Hz – 20 kHz ±3 dB
	60 Hz – 20 kHz -10 dB
Nominal Dispersion	70° H x 50° V @ -6 dB points
Power Handling (IEC)	250 W continuous, 1,000 W peak
Sensitivity	97 dB (1 W @ 1 m)
Maximum SPL	121 dB continuous, 127 dB peak
Impedance	8 Ohms
Components	1 x 12" (308 mm) LF driver
	1 x 1" (25 mm) HF compression driver

Enclosure	
Connectors	2 x Neutrik speakON NL4
Wiring	Pins 1+ / 1- input, pins 2+ / 2- link
Dimensions HWD	593 x 425 x 329 mm (23.4 x 16.7 x 12.9")
Net Weight	18.9 kg (41.7 lbs)
Construction	18 mm (¾") particle board
Finish	Black carpet covering
Grille	Powder-coated perforated steel
-	· · · · · · · · · · · · · · · · · · ·



PERFORMER TPX122M

2 Way 12" Full Range Loudspeaker and Stage Monitor for Portable PA Applications





PERFORMER TPX122M

2 Way 12" Full Range Loudspeaker and Stage Monitor for Portable PA Applications







PERFORMER TPX122M

2 Way 12" Full Range Loudspeaker and Stage Monitor for Portable PA Applications





PERFORMER TPX122M

2 Way 12" Full Range Loudspeaker and Stage Monitor for Portable PA Applications





For service, support or more information contact the TURBOSOUND location nearest you:

MUSIC Tribe Brands UK Ltd. Tel: +44156 273 2290 Email: CARECrea@music-group.com

CAREEnte@music-group.com CARELife@music-group.com

USA/Canada **MUSIC Tribe Commercial NV Inc.** Tel: +1 702 800 8290

Email: CARECrea@music-group.com CAREEnte@music-group.com CARELife@music-group.com

MUSIC Tribe Services JP K.K. Tel: +81 3 6231 0453 Email: CARECrea@music-group.com CAREEnte@music-group.com

CARELife@music-group.com

