

Features

- Unidirectional Dynamic Microphone
- 14" Gooseneck
- Mic On/Off Switch
- Remote Chime Switch



Description

The RM-01 is an ideal remote paging microphone with push-to-talk and push-to-chime control. It features a unidirectional dynamic microphone with a 14" gooseneck. The microphone has a frequency range of 100Hz to 18 kHz. The stand is of heavy diecast-zinc construction to provide stability and minimize noise caused by the operator touching the stand.

Technical Specifications

ELECTRICAL	RM-01
Input Sensitivity/Impedance	-75dB \pm 3dB (0dB=1V/ μ bar@1kHz), 600 Ω
Frequency Response	100Hz - 18kHz
Type	Moving Coil Dynamic
Directional Characteristic	Unidirectional
GENERAL	
Weight	3.8lbs.
	1.4kg
Dimensions (W x H x D)	3.5" x 1.8" x 5.2"
	90mm x 45mm x 133mm

RM-01 Architects and Engineers Specifications

The remote paging microphone shall have push-to-talk and push-to-chime switches. It shall feature a unidirectional dynamic microphone element with a 14" gooseneck extension. The stand shall be of diecast-zinc construction to provide stability and minimize noise caused by an operator touching the stand.


The remote paging microphone shall meet the following performance criteria:

Frequency response shall be 100Hz to 18kHz. Input sensitivity and impedance shall be $-75\text{dB} \pm 3\text{dB}$ ($0\text{dB}=1\text{V}/\mu\text{bar}@1\text{kHz}$), 600Ω .

The remote paging microphone base shall measure 3.5"(90mm) wide x 1.8"(45mm) high x 5.2"(133mm) deep.

The remote paging microphone shall be an Inter-M model RM-01.

RM-01 Top, Side and Rear Views

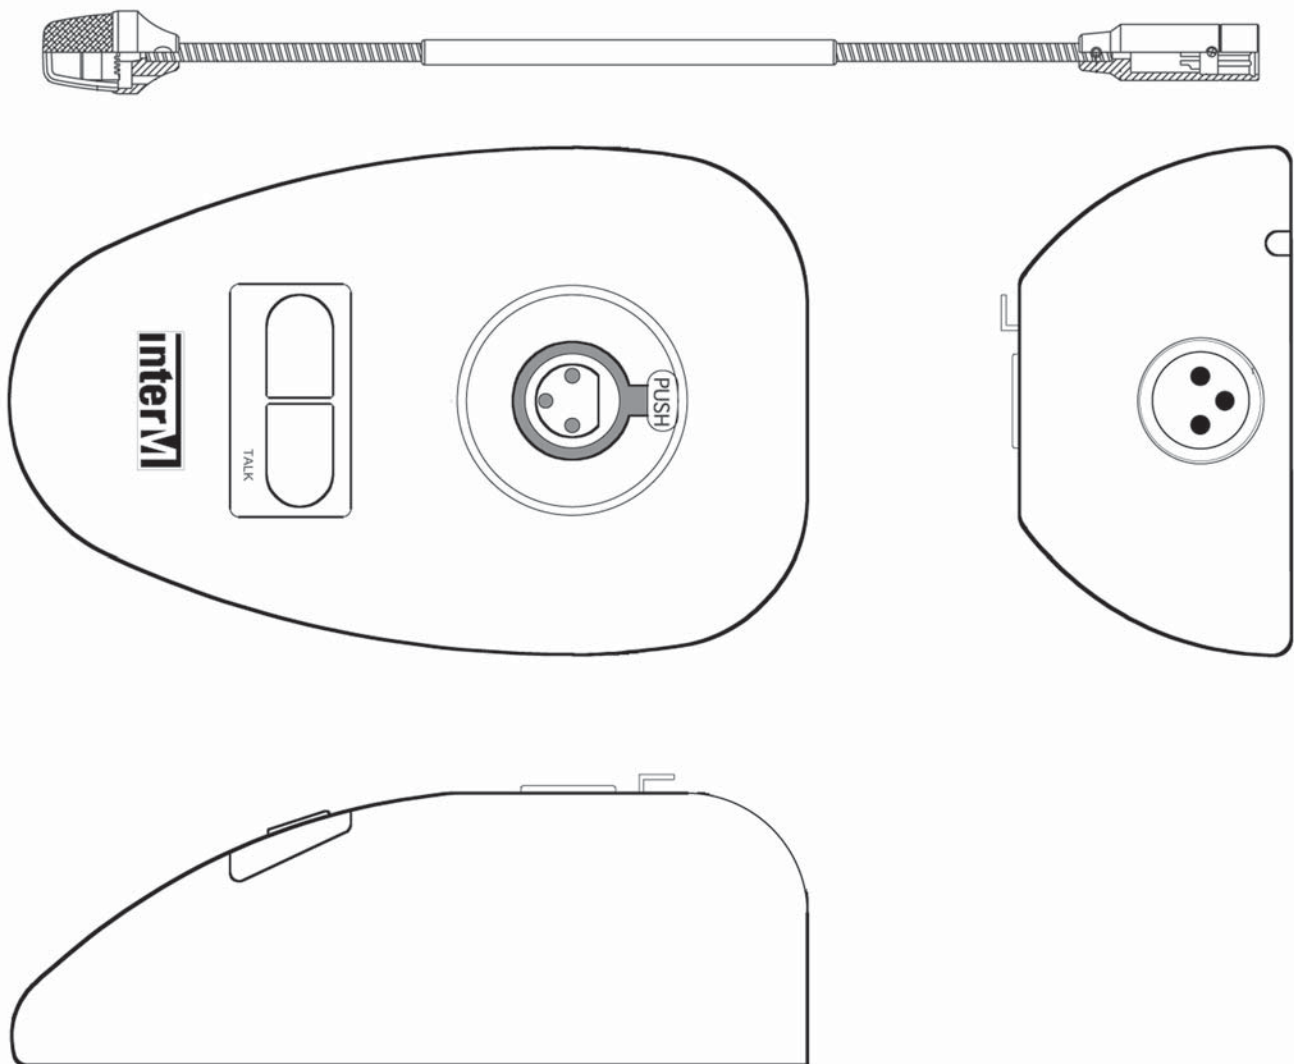

Inter-M Americas, Inc. • 1 E. Beacon Light Lane • Chester, PA 19013
Tel: 610-874-8870 • Fax: 610-874-8890 • E-mail: info@inter-m.net
Website: www.inter-m.net

Inter-M Corp. (Korea) • 653-5 Banghak-Dong • Dobong-Ku • Seoul • Korea
Tel: 82-2-2289-8140~8 • Fax: 82-2-2289-8149 • E-mail: export@inter-m.com
Website: www.inter-m.com