

RDB109 SOUND CENTER



The RDB109 is an audio distribution device with a single balanced XLR input, distributed via transformer isolation to ten balanced XLR outputs. The RDB109 may be combined with a Rolls MP13 Mic Preamp, CL151 Mic Preamp/Compressor Limiter, or DU30 Mic Preamp/Ducker for clear microphone access to the RDB109.

FEATURES:

- Balanced female XLR Input
- Ten transformer balanced male XLR Outputs
- Docking Bay for addition of Rolls Mic Preamp Accessories including:
 - MP13 Mini Mic Preamp
 - CL151 Mic Preamp with Compressor/Limiter and Noise Gate
 - DU30 Ducker Mic Preamp with automatic ducking

SPECIFICATIONS

Connectors:	1 XLR Female Input Jack 1 XLR Male Loop Through Jack 10 XLR Male Output Jacks
Frequency Response:	30 - 20kHz +0 /- 3 dB
Output Impedance:	600 Ω each
Input Impedance:	60 Ω
Size (W x H x D):	19" x 1.75" x 2.5" (480 x 45 x 64 mm)
Weight:	4 lbs.

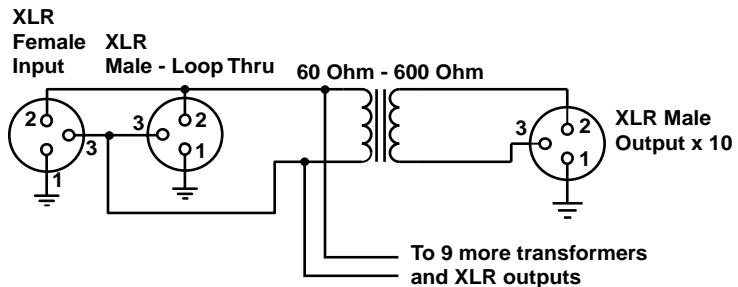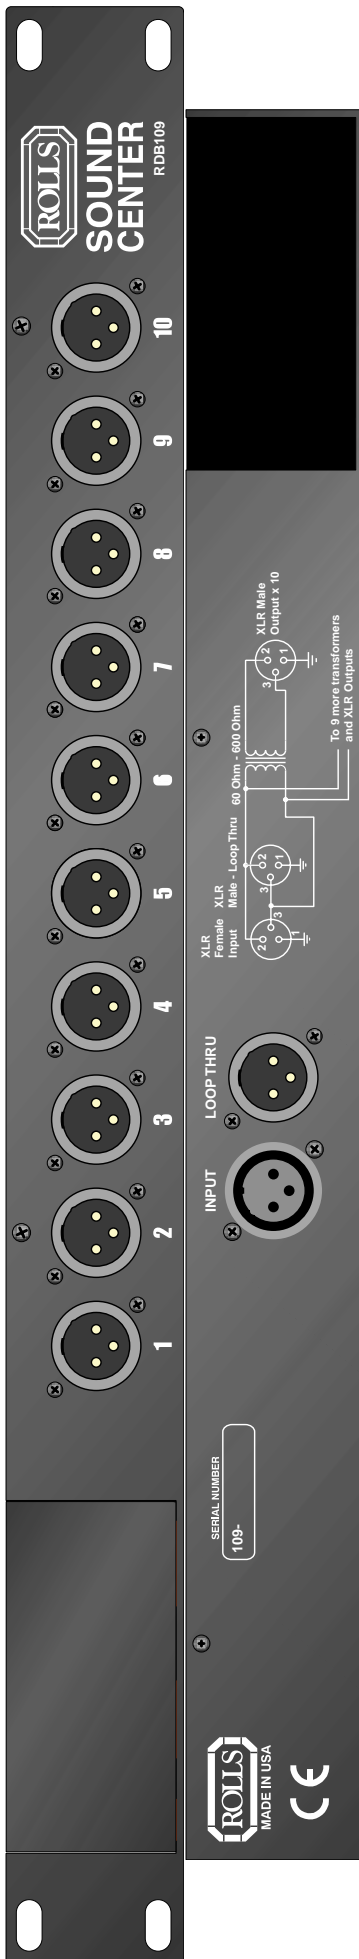

ROLLS Corporation
5968 South 350 West, Salt Lake City, UT, 84107
(801) 263-9053 FAX (801) 263-9068
info@rolls.com • www.rolls.com