
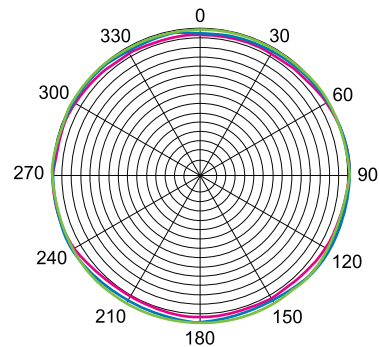


TEST MICROPHONE

CM-TM

The Check Mate Test Mic (CM-TM) captures acoustic measurements of a room. The CM-TM can be used with numerous software programs or RTAs (Real Time Analyzers). The CM-TM provides a flat frequency response, and is perfect in the studio, live sound, or installed sound.

- Polar Pattern: Omni-directional
- Frequency Response: 20Hz-20kHz
- Sensitivity: $-32\text{dB} \pm 2\text{dB}$
($0\text{dB} = 1\text{V}/\text{Pa}$ at 1kHz)
- Output Impedance: $100\Omega \pm 30\%$
- Working Voltage: 9-52V
- Diameter: 12.75mm/ (about .5 inches)

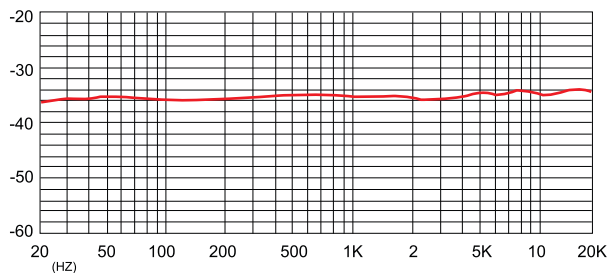

Specifications subject to change without notice.



MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR

601 E. Pawnee Wichita, KS 67211 316. 263.2852 FAX 316.263.0642 www.galaxyaudio.com

Distributed outside the United States by **E and E Exports, Inc.** 2815 Junipero Ave. Suite 101 Signal Hill, CA 92614
562.988.3447 FAX 562.989.3037

Distributed in Canada by **Audio Distributors International (ADI)** 1275 Newton, unit 6 Boucherville, QC J4B 5H2 Canada
450.449.8177 FAX 450.449.8180

051711