Marshall


1. RS-232 Connection

▼ RS-232 IN Pins Instructions



NO	Pins	Signals
1	DTR	Data Transmission Reade
2	DSR	Data Set Reade
3	TXD	Transmit Data
4	GND	Ground
5	RXD	Receive Data
6	GND	Ground
7	IR OUT	IR Commander Signal
8	N.C.	No Connection

▼ RS-232 Connection Instructions




▼ RS-232 OUT Pins Instructions




NO	Pins	Signals
1	DTR	Data Transmission Reade
2	DSR	Data Set Reade
3	TXD	Transmit Data
4	GND	Ground
5	RXD	Receive Data
6	GND	Ground
7	OPEN	Reserved
8	OPEN	Reserved

▼ RS-232 Connection Instructions



1. RS-422 Connection

▼ RS-422 Pins Instructions




Pin NO.	Function
1	RXD OUT-
2	RXD OUT+
3	TXD OUT-
4	TXD OUT+
5	GND
6	RXD IN-
7	RXD IN+
8	TXD IN-
9	TXD IN+

▼ RS-422 Connection Instructions


Applicable to


Marshall VS-PTC-200 Camera Controller



▼ RS-422 Connection Instructions

Applicable to **SONY Compact Camera Controller**



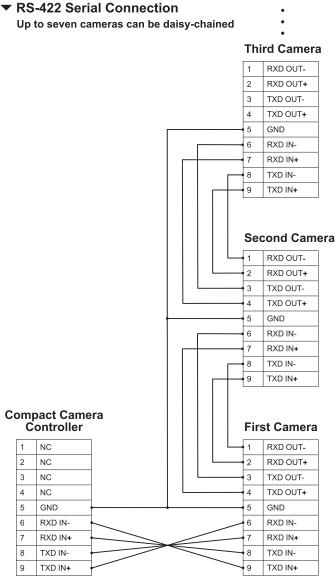



CV620 Series & VS-PTC-200 / RS422

Quick Set up



Controller to Camera

GND to #5 on Camera RXD - to #9 on Camera RXD + to #8 on Camera TXD - to #7 on Camera TXD + to #6 on Camera

Camera Settings

Protocol - VISCA
Baud Rate - 9600
Camera ID - #1
Control Port - RS422

Controller Settings

GND RX-RX+

TX+

Set up
ADMIN PIN #111111
CAMERA SETTINGS - ENTER
CAM ID #1 - ENTER
PROTOCOL - V - ENTER
BAUD RATE - 9600 - ENTER
ADDRESS - #1 ENTER
It will bring you back to the start
hit ESC - Move Joystick