



OVERVIEW

The PoE Outdoor IP Strobe (IPSTROBE-O) provides an additional mode of emergency notification or alert messaging on the perimeter of your facility.

SIP INTEGRATION



SIP-enabled
SIP ring detection alert

SOFTWARE



Diagnostic software included
Compatible with third-party
software, including InformaCast,
Revolution, and Cisco CallManager

OUTDOOR APPLICATIONS



Outdoor rated IP strobe
Weather resistant
enclosure

SOLUTIONS

- Code alerts
- Emergency notification
- SIP integration

ADDITIONAL FEATURES

- Built-in web server
- Full multicast and broadcast support
- Ships with blue lens
- Weather resistant closure included

ACCESSORIES

Color Lenses from System Sensor
Yellow, Green, Red
(Blue lens included)

SOFTWARE

The IPSTROBE-O integrates easily with third-party mass notification software, as well as SIP and VoIP phone systems, enabling a facility to take advantage of all the device capabilities. The device also comes with diagnostic software (compatible to run alongside third-party software), and an on-board web server interface, both which provide the ability to monitor and troubleshoot the ANetD devices on the network.

Third-Party Software

- InformaCast (Singlewire)
- Revolution (Syn-Apps)
- IPSession (IPCelerate)
- MessageNet Systems
- BellComander (Acro Vista)
- And more!

VoIP Phone Systems


- Cisco CallManager
- Mitel
- Avaya
- 3CX
- Polycom
- And more!

IPClockWise


- Diagnostic tool included with device purchase
- Complements investment in third-party software
- Developed and supported by Advanced Network Devices

DIMENSIONS


Back

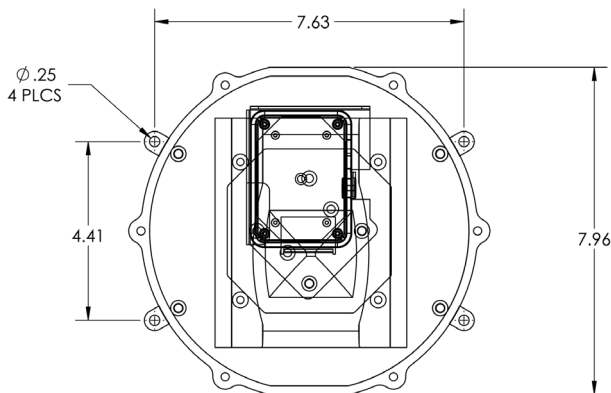

Side

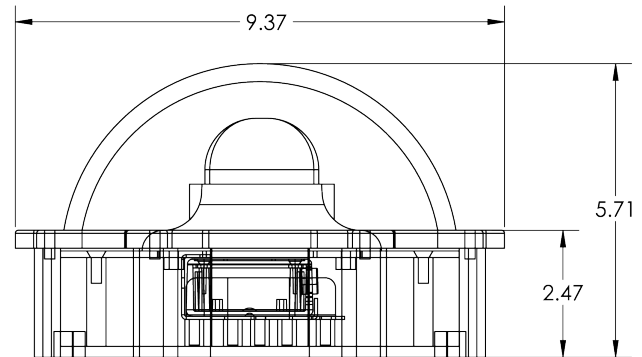

Side

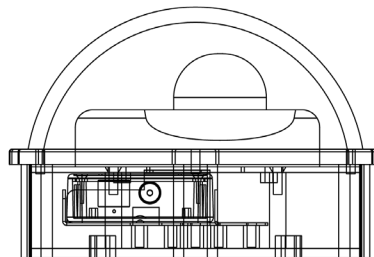

SPECIFICATIONS	IPSTROBE-O
ETHERNET I/F	10/100 Mbps
FLASH RATE	1 Flash per Second
LUMINOUS INTENSITY	15/75 Candela
POWER INPUT	PoE (IEEE802.3af) 15.4 W or PoE+ (IEEE802.3at) 30.0 W (LED Power Indication)
SUPPORTED PROTOCOLS	SIP, IPv4, IPv6, 802.1X, HTTP, SLP, TFTP, NTP, SNMPV1 & SNMPV2c, DHCP, IGMP, ICMP, TCP/IP, LLDP-MED, UDP, MDNS & MDNS-SD
OPERATING TEMPERATURE	-10° C to 50° C (14° F to 122° F)
DIMENSIONS	7.63" W x 7.96" H x 5.71" D
WEIGHT	3 lbs (1.36 kg)
WARRANTY	2 Year Limited

Due to continual product development, specifications are subject to change without notice.

