


# AES/DMX Digital Cable

## CVS LKDD02S2

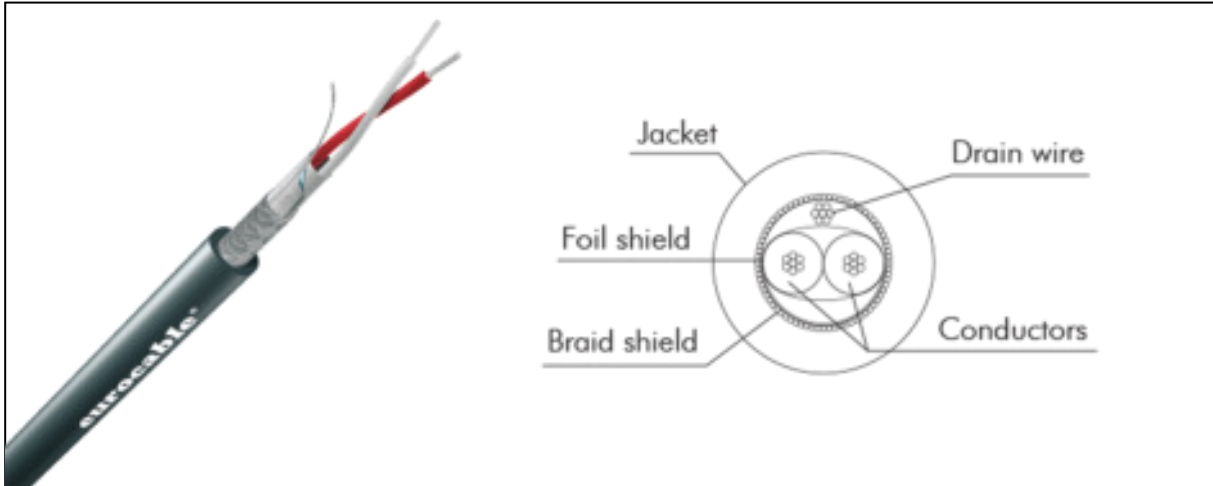

CVS LKDD02S2		
ELECTRICAL DATA		
D.C.R. at 20°C		≤ 94.2 ohm/km
Capacitance Cond/Cond		70 pF/m
Nominal Imp.		110 ohm/100m
Attenuation (2-8 MHz)		2.2-7.2 dB/Km
Vel. of Prop.		78%
Inductance		55uH/100m
GENERAL DATA		
Cable	O.D.	6.00 mm
	Standard reels	100 m
	Bending radius	>10 xO.D.
	Weight Kg/100m	4,67
	Op. temp.	[-15°C;+80°C]
Jacket	Material	PVC TM2
	Nom. Thick.	>1.0 mm
Shield	Material	Braided electrolytic bare copper shield
	Coverage	80%
	Foil	Al/PET tape
Conductor	Qty	2
	Strand	7 x 0.203 mm
	Area/AWG	0.22xAWG24
	Insul. O.D.	1.6 mm
	Insulation Material	Foamed polyethylene (PEE)