



L275-77 RACK (22"D)

L275-77-S
Seismic version

-S Seismic versions are additionally P.E. Certified for:

Seismic anchorage to meet IBC, UBC and CBC codes.

Anchorage and structure to meet IBC Essential Facilities code.

Anchorage to meet OSHPD healthcare codes in California.

L275 Series Racks

22"D / Adj. Rails / 7RU Top / Rear Door

Racks Include:

- **Rear Door:** Recessed with vents and lock.
- **Mounting Rails:** 1-pr, adj. 2-sided w printing (10-32, 12-24, 6mm)
- **Flush Closure Panels for 7RU Top:** 3RU and 4RU solid.
- **Removable Knockout Panels:** Above and below rear door.
- **Panel Hardware:** PilotPoint™ screws with captive washers.
- **Wrinkle Powder Epoxy Finish:** Black or neutral (see -G below)

Ordering Options: (suffix model number)

- **-S Seismic Certified version.** Same as above plus reinforced base, 'X'-style sides and P.E. Certified install manual per UBC, CBC and IBC code compliance. Also certified by OSHPD for healthcare facilities in California and by IBC for Essential Facilities.
- **-NP Negative Pressurization version.** Standard model without vents in rear door
- **-VT Vented Top panels.** Standard model with vented top panels instead of solid.
- **-G Network Grey Finish.** Neutral computer/putty color.

Accessories (order separately - see page 3):

- **Side Panels:** Vented (standard) or suffix -NP for no vents.
- **Front Doors (surface):** Choose solid, plexiglas or perforated.
- **Fan Panels:** Choose 3RU styles.
- **Platform Bases:** Choose mobile or stationary. *Bases will not mount seismic models.*
- **Cable Raceway:** 4"W x 77"H mounts between racks.

See also: panels & accessories, thermal & wire mgmt plus the Power section.

Description

Lowell's UL Listed (Standard 1678) ganging rack frame systems are engineered for efficient installation and reliable support of rack mounted equipment. System approach with itemized list of included features, ordering options and accessories allows you to order and install with confidence. Clean design with beveled edge corners, front and rear, combines with high quality wrinkle powder epoxy finish for great looks and durability. Standard color is black; to order neutral Network Grey, suffix (-G).

Robust Support. L275 Series racks are rated by UL to support up to 3150lbs. They are welded 16-gauge US steel with seamless side-frame construction, a 14-gauge steel bottom, and reinforcement at load-bearing junctures. Equipment mounts to adjustable rails that are recessed to provide 1.75" clearance to the outside of the rack and 2.5" from the rails to the inside of an optional surface front door. Unique, 2-sided rails are installed with the tapped (10-32) side in the primary position and may be field reversed to expose the square punched side for use with cage nuts and 12-24, 6mm or 10-32 screws. Rails are also printed with easy-to-read rack unit increments. Threaded, 10-32 PilotPoint™ screws/washers with 5.1 hardness are included.

Cable Management. Features include rear vertical arrays of 2" holes and 4" x 1.5" openings front to rear along the bottom for cabling between racks. Top entry is provided by the open access top and a 6" deep rear conduit plane having knockouts for conduit size 2"-1" (3) and 1.5"-1" (2), plus room to use a Greenlee-style punch to make a 4" conduit opening. Top also features .5" knockouts (6) for BNC style wireless antennas. Rear entry is provided via removable knockout panels above and below the rear door (see detail drawing on page 2). Bottom entry is provided via a full-size opening. Each rack also features abundant cable lacing

points and a generous wire management space of nearly 2" between the front rails and the front-to-rear rail supports.

Open-access Top with Flush Closure Panels is 7RU with integral E.I.A. rackrail for 19"W cooling and panel accessories (solid panels are included; suffix -VT if vented top panels are desired).

Open-access Bottom features a 14-gauge frame with a full-size opening to facilitate floor entry of cable. Base frame includes T-nuts for optional leg levelers, holes for optional anchor bolts (by others) and a grounding lug in the rear left corner. The bottom will accept an optional stationary or mobile platform base if desired. *Bases will not mount seismic (-S) versions.*

Ventilation is achieved through vents in the rear door and vents above and below the front door. Solid top panels (included) may be changed to vented by suffixing -VT. Additional ventilation accessories (page 3) include vented side panels, a perforated front door and fans. For applications where Negative Pressurization of a rack is preferred, suffix Model with -NP for no rear door vents. Side panels may also be ordered with -NP suffix for no vents.

Seismic P.E. Certified Versions (-S) are available with welded brackets in each corner of the base, holes for anchors (by others), new 'X'-style side frame and most importantly P.E. Certified installation documents. *Note: there are three different sets of P.E. Certified documents; please specify the code to which your rack must comply when ordering:*

- * **IBC/UBC/CBC Anchorage** to meet life safety requirements in seismic zones 1, 2, 3, 4A, 4B, and 4C.
- * **IBC Anchorage and Structure for Essential Facilities** (Ip= 1.5) to ensure the survival and operability of critical equipment following a seismic event.
- * **OSHPD** for fixed equipment anchorage in healthcare facilities in California.

For additional information request seismic technical summary #1AT-100.



L275 Series

19"W x 22"D Ganging Rack System

RACKS



Open Frame Floor



Solid Side Floor & Desk

Wallmount Surface & Recessed

Panels & Accessories


Thermal & Wire Mngmt

Ganging Racks

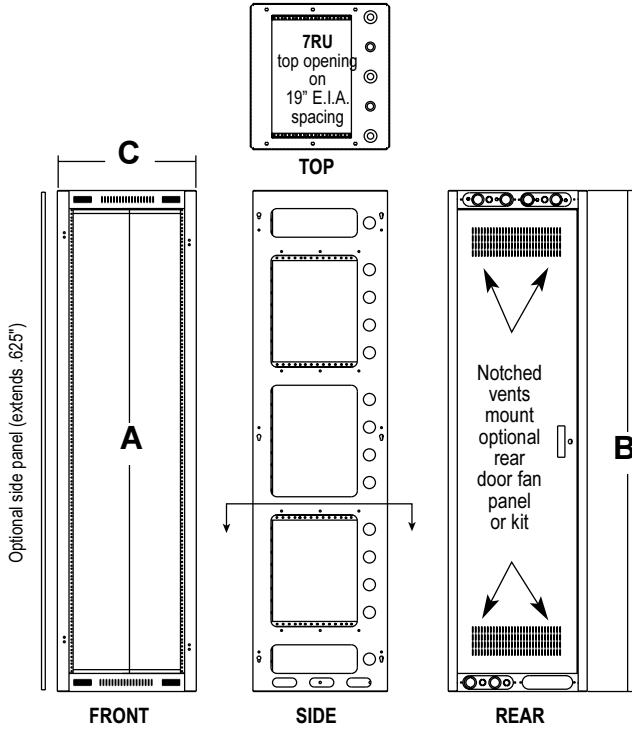


KNOCKOUT PANELS ABOVE REAR DOOR

Each panel includes .5" knockouts for wireless antennas and .75"-.5" & 1.5"-.1" knockouts for conduit.




KNOCKOUT PANELS BELOW REAR DOOR

One panel includes .75"-.5" & 1.5"-.1" knockouts for conduit. The other is a blank project panel. Seismic (-S) models have two blank project panels.

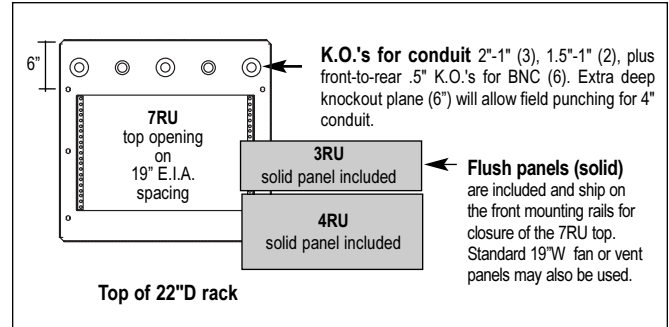


Top of 22"D rack

TOP VIEW

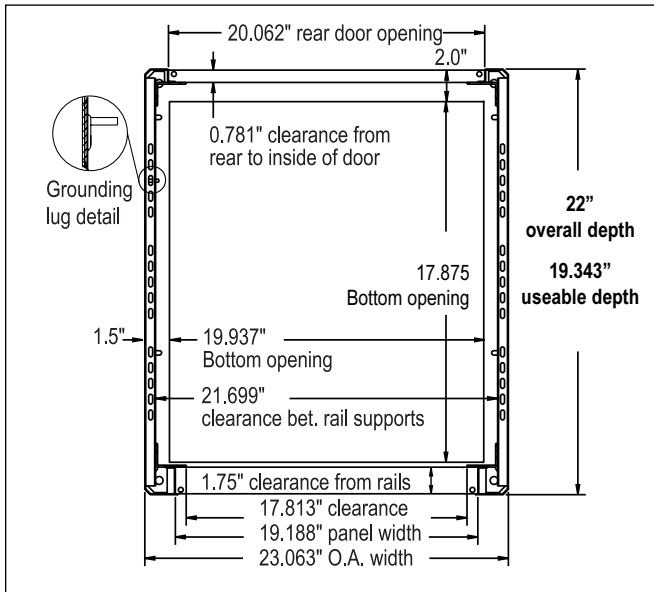

BOTTOM FOOTPRINT & RACK CROSS-SECTION
(see tech sheet #1AT-100 for seismic base detail)

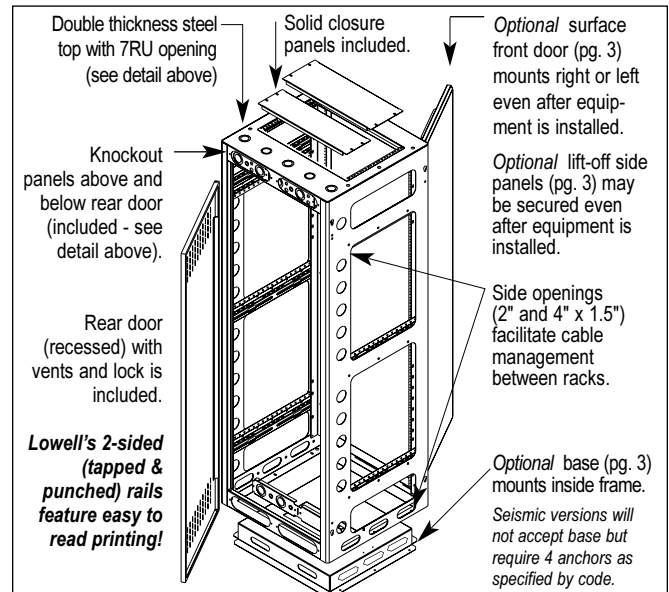

REAR ASSEMBLY VIEW

19"W Rack Model	L275-61*	L275-70*	L275-77*
Panel Space "A"	61.375"	70.125"	77.125"
Rack Units (1.75")	35RU	40RU	44RU
Overall Height***	67.375"	76.125"	83.125"
Overall Width "C"	23.062"	23.062"	23.062"
Overall Depth	22"	22"	22"
Usable Depth**	19.343"	19.343"	19.343"
Mounting Rails (tapped & Punched****)	1 Pair adjustable	1 Pair adjustable	1 Pair adjustable
Panel Hardware (PilotPoint™)	Screws & washers (50 qty)	Screws & washers (50 qty)	Screws & washers (50 qty)
Recessed Rear Door (vented)	To change vented rear door to non-vented version, suffix model -NP (negative pressurization)		
Top Closure Panels (solid) 3RU & 4RU	To change solid top panels to vented panels, suffix model -VT (vented top)		

* Order options: Suffix rack Model: -S for Seismic, -NP for Negative Pressurization-no rear door vents, -VT for vented top panels (instead of solid), -G for Network Grey color instead of black.


Usable depth is defined as the maximum racking depth with front rails in the fully forward position. *Shorter versions are available upon request.

****2-sided printed rails are tapped for 10-32 screws and may be field reversed to expose the square punched side for 12-24, 6mm, 10-32 screws with cage nuts.




L275 Series


19"W x 22"D Ganging Rack System

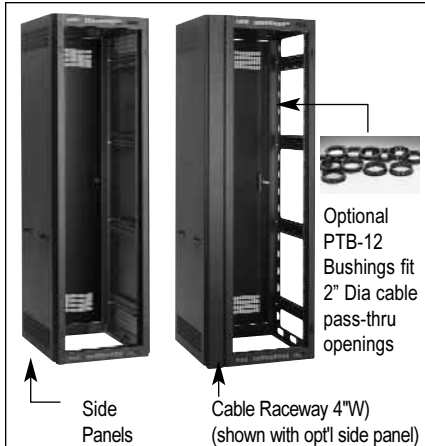


Accessory Side Panels & Cable Raceway

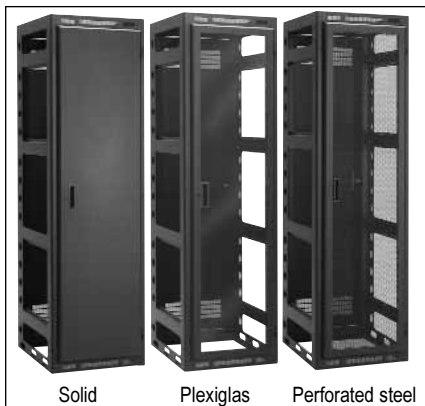

Accessory Surface Doors (1"D)

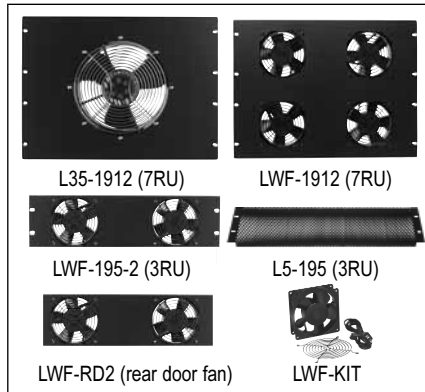

Accessory Fan and Vent Panels

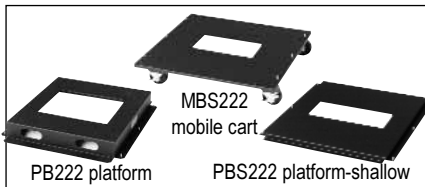

Accessory Platform Bases



Accessory Laminate Tops

Rackware® System Accessories - Order separately

Side Panels. Beveled edge panels feature lift-off convenience with pocket grips and unique guide-post/keyhole mounts. Panels may also be secured with screws (provided) before or after equipment is installed at the easily accessible anchor points in the front and rear of the frame. Each panel (sold in pairs) extends .625" from the frame and is 18-gauge steel finished in wrinkle powder epoxy. Side panels include vents top and bottom, but may be ordered without vents for applications where Negative Pressurization of the rack is required; suffix Model with -NP for no vents.

Cable Raceway and Cable Bushings. Raceway extension mounts 77" (44RU) racks to provide a 4"W space for wire or AC management between racks or on the side of a rack with side panel closure. Three pieces plus hardware. PTB-12 2" bushings also available.

Surface Front Doors. All racks include pre-threaded hinge inserts to mount a door on the right or left even after equipment is in place. Beveled edge doors provide 180° opening access, extend 1" from the rack frame and provide .75" of space from the frame on the inside to accommodate equipment with protruding knobs/handles. *Note: the front rails are recessed 1.75" from the front frame providing a full 2.5" clearance from the rail to the inside of the closed door.* Surface front doors are keyed differently than the rear door. See also dual door Series L46 frame that accepts two doors (separate spec sheet).

- **Solid Door.** Series L2150 is precision-formed from a single sheet of 16-gauge steel.
- **Plexiglas Door.** Series L2150-P is a smoked 3/16" thick Plexiglas panel mounted within a 16-gauge steel frame for installations that desire security and visibility.
- **Perforated Door.** Series L2150-PF is a fully perforated door formed from one piece of 16-gauge perforated steel for full ventilation, visibility, security and great looks.

Cooling and Vent Panels for 7RU Top Opening (solid panels ship with rack).

- **Fan Panels.** Flush mounting models L35-1912 and LWF-1912 are 7RU with one 10" 550 cfm fan and four 4.7" 50 cfm whisper fans respectively. Models LWF-195-2 and LWF-195-3 are 3RU with two or three 4.7" 50 cfm whisper fans.
- **Perforated Vent Panels.** Series L5 mounts flush. Choose 1RU - 7RU sizes.

Cooling Fans for Rear Door

- **Fan Panel.** Model LWF-RD2 with two 4.7" 50 cfm whisper fans mounts to notches in the top and bottom of the rear door. Single fan unit LWF-KIT may also be used.

Optional Bases for Non-seismic Racks. (center wire opening size 5" x 12.96")

- **Mobile Base/Cart.** Model MBS222 features 3" swivel/swivel-locking casters in the far corners for extra stability in a 22"D cart. Mounts under frame; increases height 4.062".
- **Stationary Bases.** Models mount inside rack frame. Model PB222 is flush to bottom rack space; PBS222 is 2.25" below the bottom rack space. No height increase.

Laminate Top. 24.687"W x 24.25"D x 1"H with rubber edge installs into top rails. Cherry or Graphite.

ACCESSORY SELECTION AND ORDER GUIDE FOR L275 SERIES RACKS

Accessories Mount Rack Model:	L275-61	L275-70	L275-77
Side Panels* (pair)	L275-61SP**	L275-70SP**	L275-77SP**
4"W Cable Raceway (77"H, 44RU only)	--	--	L275-77CR
Cable Bushings (set of 12) fits rear 2" cable openings	PTB-12	PTB-12	PTB-12
Surface Front Doors* (1"D)			
Solid steel	L2150-61	L2150-70	L2150-77
Plexiglas with steel Frame	L2150-61P	L2150-70P	L2150-77P
Perforated steel	L2150-61PF	L2150-70PF	L2150-77PF
Fans and Panels for 7RU Top Opening			
7RU Fan Panel (10" fan)	L35-1912	L35-1912	L35-1912
7RU Fan Panel (four 4.7" fans)	LWF-1912	LWF-1912	LWF-1912
3RU Fan Panels (two or three 4.7" fans***)	LWF-195***	LWF-195***	LWF-195***
3RU Perforated Panel (also avail in 1RU-10RU sizes)	L5-195	L5-195	L5-195
Fan for Rear Door			
Panel (two 4.7" fans)	LWF-RD2	LWF-RD2	LWF-RD2
Kit (one 4.7" fan)	LWF-KIT	LWF-KIT	LWF-KIT
Platform Bases or Levelers			
Mobile Cart with 3" Casters (adds 4.062"H)	MBS222	MBS222	MBS222
Stationary Base	PB222	PB222	PB222
Stationary Base-Shallow	PBS222	PBS222	PBS222
Levelers (2 pair heavy duty)	L195	L195	L195
Extra Mounting Rails (1 pair supplied - order for 2nd set)	L212-61	L212-70	L212-77
Laminate Top (1"H) Cherry or Graphite	CT222 / GT222	--	--
Extra Panel Hardware PilotPoint™ 10-32	RSP-500 (500 qty jar), RSP-100 (100 qty bag, RSP50 (50qty bag)		

*Standard color is Black; to order Network Grey suffix Model with (-G). ** To order side panel without vents, suffix -NP. ***Suffix model with quantity of fans: LWF-195-2 has two 4.7" whisper fans; LWF-195-3 has three.



L275 Series

19"W x 22"D Ganging Rack System

A & E Specifications

Ganging rack frame(s) shall be Lowell Model _____ (L275-61, L275-70, L275-77) Rack frame(s) shall measure 23.062"W x 22"D x _____"H with _____RU panel space for mounting 19"W E.I.A. standard components. Rack(s) shall include a vented rear door, solid top closure panels and one pair of adjustable and reversible mounting rails tapped 10-32 on one side and square punched on the other.

Each welded assembly shall be UL Listed under Standard 1678 and be of 16-gauge US Certified steel with seamless side-frame construction and a 14-gauge steel bottom with reinforcement at all load-bearing junctures. Rack frame shall include compound knockouts on the top for conduit size 2"-1" and 1.5"-1", .5" knockouts for BNC wireless antennas, and a 7RU top opening with integral E.I.A. rackrail to accept 19" wide fan or panel accessories (solid closure panels included). Bottom shall include a grounding lug and provisions for optional leg levelers (order separately), optional anchors (by others), or optional platform base (order separately). Frame shall be equipped with 2" diameter cable passage holes located top to bottom along the rear side for wire management between racks. Additionally, there shall be 4" x 1.5" obround openings front to rear along the bottom of the rack to manage cable bundles between racks. Rear frame shall include removable knockout panels for passage of large cable bundles above and below the rear door. Knockout panels shall be equipped with .5" knockouts for wireless microphone antennas and include compound knockouts for conduit size .75"-.5" and 1.5"-1". Front frame shall include vents above and below the door opening. Finish shall be wrinkle powder epoxy in black unless specified as neutral Network Grey.

Ordering options:

Suffix -S (seismic) P.E. Certified version shall have welded brackets in each corner of the base, holes for anchors (by others), 'X'-style side frame and P.E. Certified installation documents. *Note: there are three different sets of P.E. Certified documents; please specify the code to which the rack must comply _____ [IBC/UBC/CBC Anchorage, IBC Anchorage and Structure for Essential Facilities (Ip= 1.5), OSHPD]. For additional information, request seismic technical summary #1AT-100.*

Suffix -NP (negative pressurization) to change the vented rear door to a solid rear door.

Suffix -VT (vented top) to change the solid top panels to vented top panels.


Suffix -G to specify neutral Network Grey (putty) color instead of Black.

Optional rack system accessories shall include a pair of vented side panels Model _____ or non-vented side panels Model _____-NP), surface front door Model _____, fan panel Model _____, cable raceway model _____, platform base Model _____ or leg leveler set Model L195. Additionally, the rack shall include the following panel and accessory Models _____, thermal and wire management Models _____, AC power distribution Models _____.

Lowell racks and cabinets are manufactured in the USA using Certified US steel. For quality assurance, they are precision formed and finished to the same exacting standards to provide trouble-free installation and professional appearance.




Remember to specify Lowell Rackware® accessories to meet your project requirements.



Vent and Blank Panels



Shelves and Drawers



Wire Management



Cooling



Hardware

Order extra PilotPoint™ screws.

See also Lowell's complete section of AC power products including rackmount panels, strips, controllers, sequencers, filters and surge suppressors.



Power