


L5 and L6 Series



Vented Steel Panels for 19" Wide EIA Racks and Cabinets

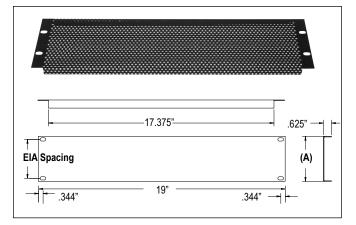

Vented Steel Panels - Perforated - L5 Series

Lowell L5 Series vent panels are perforated 20 gauge steel with a .625" flange for strength and rigidity. L5 Series are finished in smooth semi-gloss black powder epoxy paint for durable and scratch resistant performance. Attractive panels with fine-perforated .0781" holes on 1/8" staggered centers are ideal for providing heat ventilation and protection for equipment mounted in EIA standard racks.

For ordering convenience, panels are sold in single units and bulk contractor cartons. Panel mounting screws in a variety of head styles are available to meet application needs; see page 2.

Steel (20ga.) Perf (flanged) Models	(A) Panel Space (Inches)	(A) Panel Space (Rack Units)	Powder Finish	Pack Qty
L5-191	1.75"	1RU	Smooth Black	1
L5-193	3.5"	2RU	Smooth Black	1
L5-195	5.25"	3RU	Smooth Black	1
L5-197	7"	4RU	Smooth Black	1
L5-198	8.75"	5RU	Smooth Black	1
L5-1910	10.5"	6RU	Smooth Black	1
L5-1912	12.25"	7RU	Smooth Black	1
L5-1917	17.5"	10RU	Smooth Black	1



Single pack models

	.625"
T [©] EIA Spacing ↓	(A)
	.344" —

Vented Steel Panels - Slotted - L6 Series

Lowell L6 Series vent panels are slotted 16 gauge steel with a .625" flange for strength and rigidity. L6 Series are finished in smooth semi-gloss black powder epoxy paint for durable and scratch resistant performance. Rugged panels with 0.125" x 1.25" obround slots on .375" centers provide heat ventilation and protection for equipment mounted in EIA standard racks.

For ordering convenience, panels are sold in single units and bulk contractor cartons. Panel mounting screws in a variety of head styles are available to meet application needs; see page 2.

Steel (16ga.) Slot (flanged) Models	(A) Panel Space (Inches)	(A) Panel Space (Rack Units)	Powder Finish	Pack Qty
L6-191	1.75"	1RU	Smooth Black	1
L6-193	3.5"	2RU	Smooth Black	1

Steel (20ga.) Perf (flanged) Models	(A) Panel Space (Inches)	(A) Panel Space (Rack Units)	Powder Finish	Pack Qty
L5-191CC	1.75"	1RU	Smooth Black	12
L5-193CC	3.5"	2RU	Smooth Black	12
L5-195CC	5.25"	3RU	Smooth Black	6
L5-197CC	7"	4RU	Smooth Black	6




Bulk quantity models "Contractor & Master Cartons for large jobs and distribution

L6-191CC 1.75" 1RU Smooth Black 12 L6-193CC 3.5" 2RU Smooth Black 12	Steel (16ga.) Slot (flanged) Models	(A) Panel Space (Inches)	(A) Panel Space (Rack Units)	Powder Finish	Pack Qty
L6-193CC 3.5" 2RU Smooth Black 12	L6-191CC	1.75"	1RU	Smooth Black	12
	L6-193CC	3.5"	2RU	Smooth Black	12



L5 and L6 Series Vented Steel Panels for 19" Wide EIA Racks and Cabinets

Panel Mounting Screws (order separately)



NEW RSR Robertson square head available!



RSP-500 / RS-500 Jars

Model	Description	Quantity
RSP-25	Hdwr phillips finish head pilot pt w washers Blk 10-32x.875	25 pc bag
RSP-100	Hdwr phillips finish head pilot pt w washers Blk 10-32x.875	100 pc bag
RSP-500	Hdwr phillips finish head pilot pt w washers Blk 10-32x.875	500 pc jar
RS-25	Hdwr phillips truss head pilot pt w washers Blk 10-32x.875	25 pc bag
RS-100	Hdwr phillips truss head pilot pt w washers Blk 10-32x.875	100 pc bag
RS-500	Hdwr phillips truss head pilot pt w washers Blk 10-32x.875	500 pc jar
RSR-50	Hdwr robertson SQ- head pilot pt w washers Blk 10-32x.875	50 pc bag
RSR-BIT	Hdwr torx pin drive bit for RSR Series screws	1 Qty
RSV-50	Hdwr torx star post security pilot pt w washers Blk 10-32x.875	50 pc bag
RSV-BIT	Hdwr torx pin drive bit for RSV Series screws	1 Qty

Accessory Panel Space Height - Nominal		Cabinet Panel Space Opening - Actual	EIA Holes Used / Coverec per Mounting Rail
nches)	(Rack Units - RU)	(Inches)	(Spaced .625"625"5")
.75	1	1.875	3
3.50	2	3.625	6
5.25	3	5.375	9
7.00	4	7.125	12
3.75	5	8.875	15
).50	6	10.625	18
2.25	7	12.375	21
1.00	8	14.125	24
5.75	9	15.875	27
7.50	10	17.625	30
9.25	11	19.375	33
.00	12	21.125	36
2.75	13	22.875	39
1.50	14	24.625	42
6.25	15	26.375	45
3.00	16	28.125	48
9.75	17	29.875	51
.50	18	31.625	54
3.25	19	33.375	57
5.00	20	35.125	60
6.75	21	36.875	63
3.50	22	38.625	66
).25	23	40.375	69
2.00	24	42.125	72
3.75	25	43.875	75
5.50	26	45.625	78
7.25	27	47.375	81
9.00	28	49.125	84
).75	29	50.875	87
2.50	30	52.625	90
1.25	31	54.375	93
6.00	32	56.125	96
7.75	33	57.875	99
9.50	34	59.625	102
.25	35	61.375	105
3.00	36	63.125	108
1.75	37	64.875	111
6.50	38	66.625	114
3.25	39	68.375	117
0.00	40	70.125	120
.75	41	71.625	123
3.50	42	73.625	126
5.25	43	75.375	129
7.00	44	77.125	132



Cſ.

フ

 \triangleright

C

Solid Side Floor & Desk

Wallmount Surface & Recessed



Thermal & Wire Mngmt

1b-104 pg 2 of 2