

Quality Features

- Choice of three models for 27"D Lowell racks and cabinets.
- Rugged, fully-welded steel construction.
- Bases feature an opening in the center for easy cable access.
- Includes hardware for easy bolt-on installation.
- Finished in durable wrinkle black powder epoxy.



MB227

Description


Lowell Model MB227 Mobile Platform Base is a inner platform design that mounts inside the rack frame to provide the benefits of mobility and a floor positioned flush to the bottom rack space. This model is often specified to support extra-heavy equipment that is mounted in the lowest racking position. The base features heavy-duty 3" swivel casters in the front and swivel locking casters in the rear. The casters are positioned inside the platform so that the increase in overall height of the rack/cabinet when installed is only 1.25". The casters have a load rating of 350 lb each (1400 lbs total). To facilitate cable access through the bottom, there is a center opening size 13" x 11". Additionally, there are cable pass-thru openings on the side that match up to the side openings on L277 Series racks to facilitate wiring between ganged rack installations. Construction is 14 gauge steel finished in durable wrinkle black powder epoxy.



PB227

Lowell Model PB227 Platform Base is identical to the MB227 Mobile Platform Base above without casters, hence no increase in the cabinet height when installed.

Lowell Model PBS227 Shallow Platform Base provides a sub-floor 2.25" below the bottom rack space. This recessed area provides a convenient space to mount accessory devices on the floor of the installation. The base is constructed of 16 gauge steel. To facilitate cable access through the bottom, there is a center opening size 13" x 11". Construction is 14 gauge steel finished in durable wrinkle black powder epoxy.

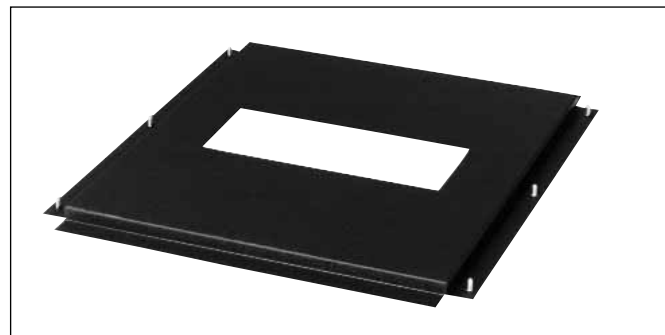

PBS227


Note: Bases may not be used with seismic versions (-S) of Lowell racks and cabinets.

27"D BASES FOR L277 RACKS AND L267/L262 SERIES CABINETS


Model	Description	Casters	Height Increase	Size O.A.	Size Inside	Center Opening	Opt'l Panel for Opening	Weight	Mounts Series*
MB227	Mobile Platform	3" Recessed	1.25"	22.812"W x 26.75"D x 3"H	19.812"W x 22.75"D	13"W x 11"D	N.A.	28 lbs.	L277, L267, L262
PB227	Stationary Platform	N.A.	0"	22.812"W x 26.75"D x 3"H	19.812"W x 22.75"D	13"W x 11"D	N.A.	24 lbs.	L277, L267, L262
PBS227	Shallow Platform	N.A.	0"	22.812"W x 26.75"D x .75"H	19.812"W x 22.75"D	13"W x 5"D	L3-195**	22 lbs.	L277, L267, L262

* Note: Bases may not be used with seismic versions (-S) of Lowell racks and cabinets.


** Optional 3RU blank panel Model L3-195 may be ordered separately to cover the opening, creating a solid surface.

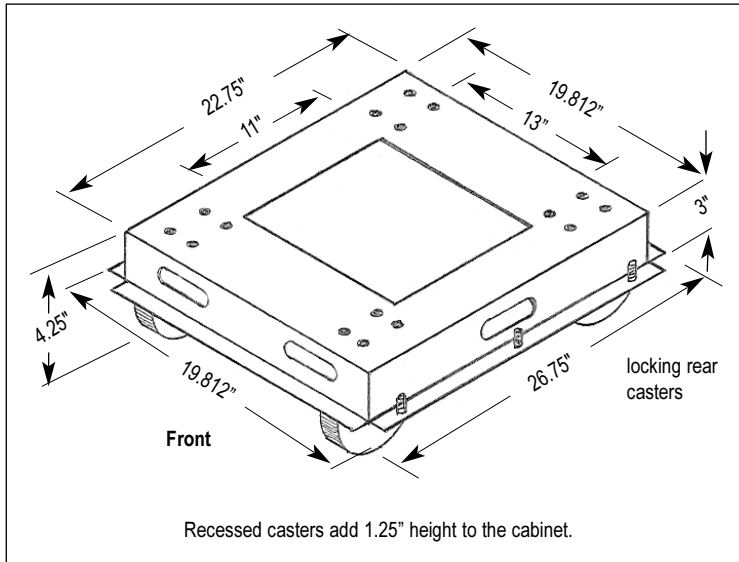

Model MB227

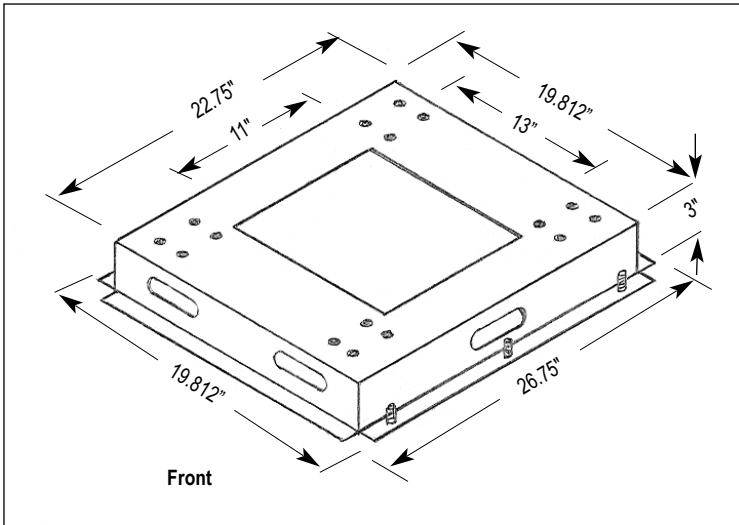

Model PB227

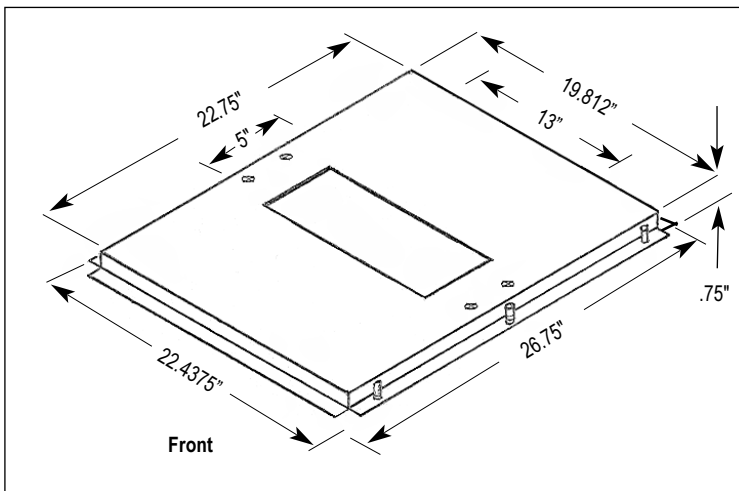

PBS227

A & E Specifications

The mobile platform base for 27"D Lowell Series _____ (L277, L267, L262) racks and cabinets shall be Lowell Model MB227. The platform base shall be of an inner platform design that mounts inside the rack frame to add the benefits of mobility and a floor positioned flush to the bottom rack space. The heavy-duty 3" swivel/swivel locking casters shall be positioned inside the platform so that the increase in overall height of the rack/cabinet when installed is only 1.25". The casters shall have a load rating of 350 lb each (1400 lbs total). The base shall facilitate cable access through a center opening size 13" x 11". The base shall also have side cable access via cable pass-thru openings that align with the side openings on ganging rack Series L277. Mounting hardware to attach the base to the rack or cabinet shall be supplied. Construction shall be 14 gauge welded steel finished in black wrinkle powder epoxy.

The stationary platform base for 27"D Lowell Series _____ (L277, L267, L262) racks and cabinets shall be Lowell Model PB227. The platform base shall be of an inner platform design that mounts inside the rack frame to add the benefits of a floor positioned flush to the bottom rack space. The installed base shall not increase the overall height of the rack/cabinet when installed. The base shall facilitate cable access through a center opening size 13" x 11". The base shall also have side cable access via cable pass-thru openings that align with the side openings on ganging rack Series L277. Mounting hardware to attach the base to the rack or cabinet shall be supplied. Construction shall be 14 gauge welded steel finished in black wrinkle powder epoxy.

The shallow platform base for 27"D Lowell Series _____ (L277, L267, L262) racks and cabinets shall be Lowell Model PBS227. The base shall be of an inner platform design that mounts inside the rack frame to add the benefits of a subfloor 2.25" below the bottom rack space. The installed base shall not increase the overall height of the rack/cabinet when installed. The base shall facilitate cable access through a center opening size 13" x 5". The opening can be closed to create a solid floor by installing an optional 3RU blank panel. Mounting hardware to attach the base to the rack or cabinet shall be supplied. Construction shall be 14 gauge welded steel finished in black wrinkle powder epoxy.

Open Frame Floor

Solid Side Floor & Desk

Wallmount Surface & Recessed

Panels & Accessories

Thermal & Wire Mngmt

19W Base Accessories