




Assembled to 45U

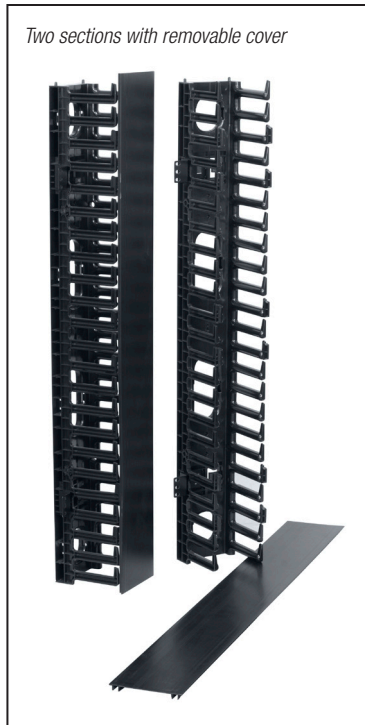

Two sections with removable cover

The vertical-mount cable duct is ideal to simplify cable routing and manage networking in data centers and telecommunications rooms. Designed for high-density cable management using less area than traditional cable managers, the single-sided plastic duct features molded fingers with integral bend radius control to help eliminate cable stress. Includes removable protective cover.

FEATURES

- Construction:
 - ABS UL94V-0 plastic, single-sided finger duct consists of two 22.5U sections, which can be assembled to 45U overall
 - Removable PVC plastic cover helps protect cables from damage and dust, while allowing easy access
- Installation: Vertical-mount
- Flexible Fingers: Maintain proper bend radius to help protect against kinks/snags
- Rounded Edge Holes: Route cables front-to-rear or rear-to-front, as needed
- Dimensions: 83"H x 6.5"D x 4.9"W (duct); 5.5"W (cover)
- Weight 20.35 lbs.
- Mounting Hardware: Includes brackets, nuts/screws

A&E SPECIFICATIONS:

The rack shall include a single-sided, vertical-mount plastic cable duct with protective cover, Lowell model VCD-45. The cable duct shall consist of two 22.5U plastic pieces that assemble to 45U overall. The unit shall include mounting brackets and hardware.

MODEL SUMMARY

| Model No. | Description | Rack Space (2-pc. assembled) | Duct Dimensions |
|-----------|-----------------------------|------------------------------|----------------------|
| VCD-45 | Vertical cable duct w/cover | 45U | 83"H x 4.9"W x 6.5"D |

Rack dimensions (rounded) – inches; 1U = 1.75"

