

SOUNDSPHERE[®]
LOUDSPEAKERS



Q-CS *Power1* Powered Loudspeaker




Power1

Direct connection
to projectors and computers with
no additional equipment required



SOUNDSPHERE®

LOUDSPEAKERS



Power1

- 15W built in amplifier
- 2 stereo inputs with gain controls
- 2 way 8" coaxial driver
- 180° x 360° dispersion
- Fewer speakers needed for better coverage
- Single speaker covers large area





Q-CS Power1


Specifications

Power1 Amplifier

Power output at 8 Ohms	15 Watts RMS
Input impedance	10K Ohms
Input gain range	-10 to 0dB
THD+N 1kHz @ 15W	≤ 0.5%
Gain	20-30dB
Input sensitivity for 15W RMS output	365-1100mV RMS
Power Input	24VDC 1.2A
Protection	Speaker short Speaker lead short to ground Overcurrent Thermal Power supply polarity

Features

- Two summing inputs accept stereo or mono unbalanced inputs
- No external stereo-to-mono adapter required
- Gain trim for each input
- Master level control

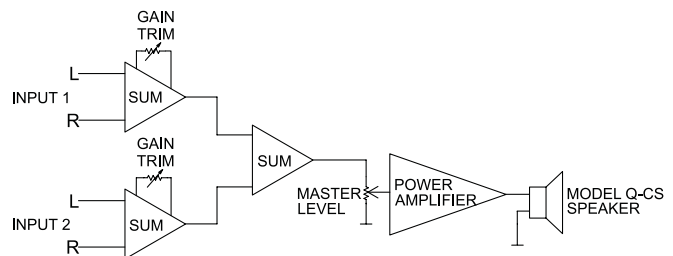

Q-CS Speaker

Sensitivity	89dB 1 Watt/1 meter
Maximum SPL	101dB 15 Watts/1 meter
Power Handling	15 Watts RMS
Frequency Response	55Hz – 16kHz ±4dB
Coverage	180° vertical 360° horizontal
Weight	7.7 lbs. (3.5 kilos)
Size	Enclosure: 7 ³ / ₈ " dia x 8 ¹ / ₈ " high (187mm x 206mm)
	Mounting Flange: 11 ⁷ / ₈ " dia (302mm)
	Grille: 12 ¹ / ₂ " dia x 1 ⁵ / ₈ " high (318mm x 41mm)
Driver	Coaxial: 8" LF, 1 ¹ / ₂ " dome HF

Features

- Smooth hemispherical coverage pattern
- Flat frequency response
- Accurate, full range voice and music reproduction without electronic processing
- High sensitivity (89dB 1W/1m)
- Fewer units produce results superior to conventional ceiling loudspeakers
- Exclusive patented Broadband Linear Excursion Control for high sensitivity and accurate, articulate low frequency performance
- Exclusive patented Exponential Diffusion Control for smooth mid and high frequencies throughout the coverage area at any volume level



Division of Sonic Systems, Inc.

10 Research Drive, Stratford, CT 06615

(203) 386-9200 • Fax: (203) 386-0773

www.soundsphere.com

