

GUE2118

## USB 2.0 Booster Extension Cable - 39ft (TAA Compliant)




- Built-in booster chipset - Amplifies high-speed USB signals for up to 39ft
- Daisy chain 3x GUE2118 to reach a maximum distance of 117ft
- USB 2.0 transfer rates up to 480Mbps
- Compact size with patent pending secured lock mechanism
- Plug-and-Play, no drivers or power supply needed

The IOGEAR TAA Compliant USB 2.0 Booster Extension Cable uses active electronics to amplify the USB signal beyond the USB 2.0 specification of 16 feet. It does this with no loss of data integrity or signal quality. The cable has male and female USB type "A" connectors. The USB "A" connector is the rectangular shaped plug found on PC's, hubs, and many other host interfaces. The IOGEAR USB 2.0 Booster Extension Cable extends from the host and provides another female "A" connector for longer distance USB needs.

The cable is transparent to the host and the device and it is compatible with any O/S or USB accessory. It is ideal for applications that require distance between a user and the peripheral. For example, placing a printer in the home, or office where users have easier access. The IOGEAR USB 2.0 Booster Extension Cable is Plug-and-Play, no additional drivers or complicated set up required. The solution can also give you the ability to daisy-chain a maximum of three cables together in order to reach up to a total of 117 feet of USB High-Speed connection.

- Built-in booster chipset - Amplifies high-speed USB signals for up to 39ft
- Daisy chain 3x GUE2118 to reach a maximum distance of 117ft
- USB 2.0 transfer rates up to 480Mbps
- Compact size with patent pending secured lock mechanism
- Plug-and-Play, no drivers or power supply needed
- Centralize USB devices and keep desktop workspace clean
- PC or Mac compatible
- TAA compliant



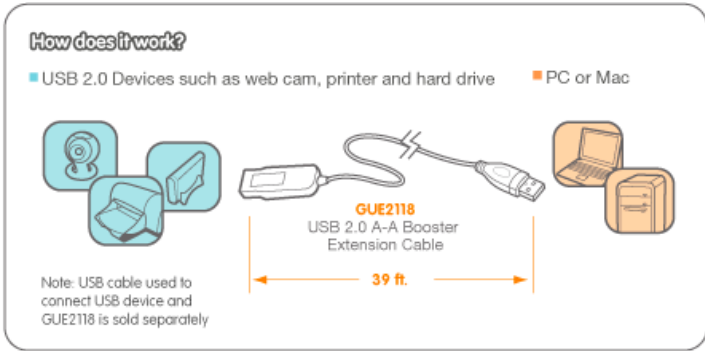

**Requirements**

**Package Contents**

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• <b>Hardware:</b></li> <li>• USB 2.0 port</li> <li>• USB 2.0 devices</li> <li>•</li> <li>• <b>Operating System:</b></li> <li>• Windows® XP,</li> <li>• Windows Vista®,</li> <li>• Windows® 7,</li> <li>• Windows® 8,</li> <li>• Windows® 8.1,</li> <li>• Windows® 10</li> <li>• Mac OS 9 to 10.x</li> <li>• Oracle® Solaris</li> <li>• Linux®, Unix and other USB supported systems*</li> <li>• Google Chrome OS™</li> </ul> | <ul style="list-style-type: none"> <li>• 1 x GUE2118</li> <li>• 1 x Quick Start Guide</li> <li>• 1 x USB Type 'A' Female Adapter</li> <li>• 1 x Warranty Card</li> </ul> |
|--|--|

\*Additional drivers and support may be needed

## Specifications

Function	GUE2118	Dimensions	GUE2118
<b>Cable Length</b>	39 feet	<b>POP Information</b>	
<b>Computer Interface</b>	USB Type A	10" Peg Hook	4
<b>Daisy Chain</b>	Up to 3 level daisy chain	6" Peg Hook	2
<b>Operating System Support</b>	Windows XP®, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1 / Mac OS X v8.6 and above / Linux Kernel 2.4.20 / Google Chrome OS	<b>Unit Dimensions</b>	
<b>Device Connection</b>	USB Type A	Length	39 ft.
<b>Environment</b>		<b>Inner Pack</b>	
Operation Temperature	32 to 158 degree Fahrenheit	Height	9"
Storage Temperature	-67 to 302 degree Fahrenheit	Length	7"
<b>USB Specification</b>	Compatible with USB 2.0/1.1	Width	7.5"
<b>Transfer Rate</b>	Up to 480Mbps	Inner Pack Qty.	3
<b>LEDs</b>		<b>Unit Package Dimensions</b>	
Link	1	Height	8"
<b>Max Output Power</b>	440mA @ 5VDC	Width	6"
<b>Cable Type</b>	Shielded	Depth	2.5"
		<b>Master Carton</b>	
		Height	10"
		Width	8.5"
		Depth	15"
		Master Carton Qty.	6
		<b>Weight</b>	
		Master Carton Wt.	9.05 lb
		Inner Pack Wt.	4.1 lb
		Unit Pack Wt.	1.2 lb
		Unit Wt.	1.05 lb