



480W Full Spectrum RGBMA LED Fanless Framing Profile Fixture



KEY FEATURES

Fanless design Full Spectrum 480W RGBMA LED Engine Precise dynamic whites from 2400 - 8500K Instant color changes, Natural color transitions Rich and intense primary colors Dual Rotating Gobos plus Animation Wheel Full Blackout Framing System Iris, Prism, and Dual Frost Wide Zoom Range from 7° to 50°

The **FUZE TEATRO™** is a silent fanless full spectrum automated LED framing fixture designed for theater, television and a wide array of other precision lighting applications. The 92 CRI engine utilizes an 480W 5-color homogenized LED array consisting of Red, Green, Blue, Mint, and Amber sources. The carefully tuned LEDs ensure accurate color reproduction and dynamic whites while delivering a powerful output of up to 15,000 lumens. Virtual color temperature, Magenta / Green adjustment plus CMY or RGB emulation provide the designer with immediate access to the impressive LED color array.

The **FUZE TEATRO** is designed for any application where a silent fully automated framing fixture with outstanding and compelling color range and quality is required. The fixtures enhanced optical design and lens coatings ensure precise and razor-sharp projections, removing all unwanted color shifting and aberrations in all zoom, focus, or framing positions.

Dual rotating gobo wheels, animation wheel, dual frost, prism and iris round out its comprehensive feature set in this quiet and extremely powerful automated framing fixture.







480W Full Spectrum RGBMA LED Fanless Framing Profile Fixture

SOURCE

480W 6,500K RGBMA LED Engine 30,000 Hour Average LED Life*

*Test lab conditions. May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming.

PHOTOMETRIC DATA

15.000 Total Lumen Output CRI 92 Zoom Range 7° - 50°

EFFECTS

Motorized Zoom 4 Rotating Full Blackout Framing Blades, +/-60° Index Dual Variable Frost Filter (Medium/ Wash) 4 Facet Round, 4 Facet Linear Prism Motorized Iris Variable 16-bit Dimming Curve Modes High Speed Electronic Shutter and Strobe Pan Angle: 540° / 630° Tilt Angle: 250° Motionless Reset

COLOR

RGBMA Color Array CMY Emulation Variable CCT 2400K - 8500K Green/Magenta Shift Virtual Gel Swatch Book

GOBOS

2x 6 Rotating / Indexing Interchangeable Glass Gobos Animation Wheel

SPECIFICATIONS

CONTROL / CONNECTIONS

16-bit Pan, Tilt, and Dimming Control DMX Adjustable LED Frequency DMX, RDM, Art-NET, sACN Protocol Support 4 Button Touch Control Panel Full Color 180° Reversible LCD Menu Display 16 Bit Resolution Adjustable Movement 5pin DMX In/Out Locking Ethernet In/Out IP65 Locking Power In/Out

SIZE / WEIGHT

Length: 18.1 in (462mm) Width: 11.8 in (300mm) Height: 31.4 in (798mm) Weight: 79.4 lbs. (36kg)

ELECTRICAL

AC 100-240V - 50/60Hz 725W Max Power Consumption 14°F to 113°F (-10°C to 45°C)

APPROVALS / RATINGS

CE | cETLus | FCC | IP20











480W Full Spectrum RGBMA LED Fanless Framing Profile Fixture

GOBOS / ANIMATION WHEEL


ROTATING GOBO WHEEL 1



ROTATING GOBO WHEEL 2



ANIMATION WHEEL



| FUZ625 | 1237000274 | FUZE TEATRO |
|---------------|------------|---|
| TRIGGER CLAMP | 1741000032 | Heavy Duty Wrap Around Hook Style Clamp |
| STR527 | N/A | 5 ft. (1.5m) IP65 5pin XLR Cable |

ORDERING INFORMATION





Specifications are subject to change without notice ©Elation Professional 01/17/2024 Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com


Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu





480W Full Spectrum RGBMA LED Fanless Framing Profile Fixture

UNIT DIMENSIONS

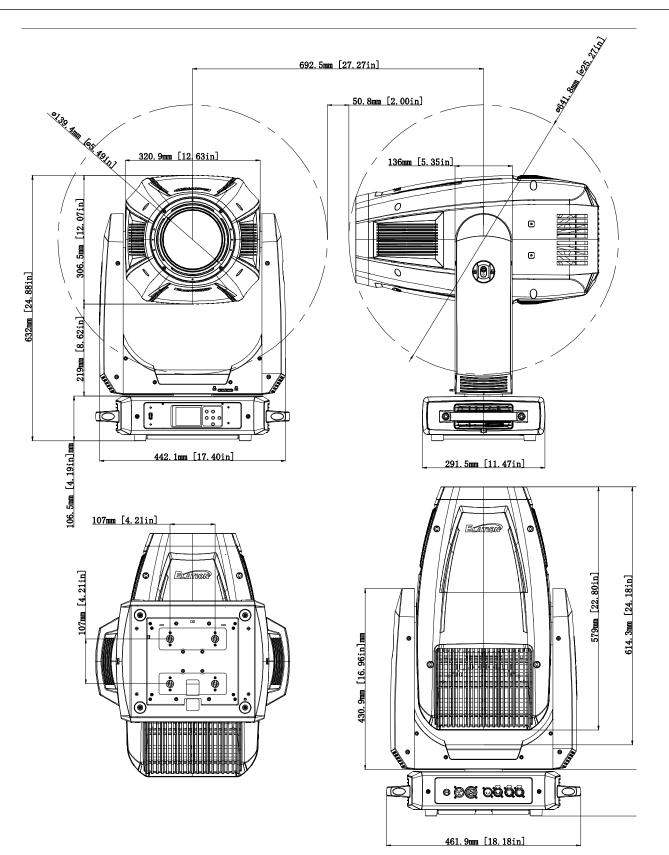



Specifications are subject to change without notice ©Elation Professional 01/17/2024 Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu