



Model No.: TLM572

# Dual Voltage Transformer

## A & E Specifications

The line matching transformer shall be Lowell Model TLM572. Primary voltage shall be 70V or 25V with a power rating of 5 watts. Primary taps shall be available at 5, 2, 1, .5, and .25 watts. Secondary impedance shall be 8-ohms. Frequency response of the transformer shall be 50Hz-20kHz  $\pm$ 1dB with insertion loss not to exceed 0.8dB.

TLM572

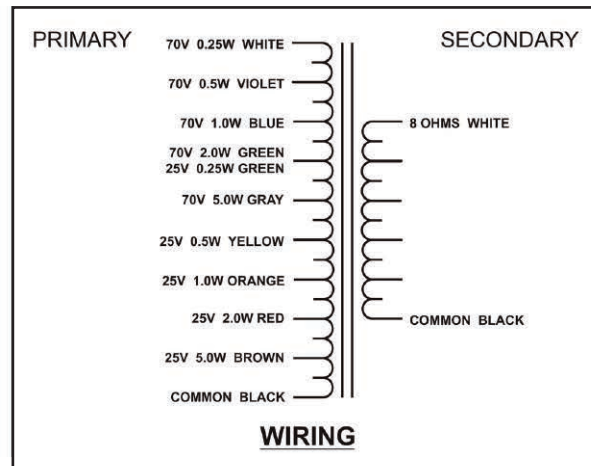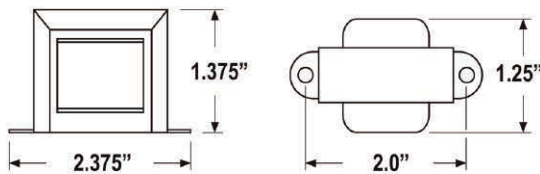

Model No.	Primary Voltage	Power Rating	Primary Taps	Secondary Impedance	Core Size (in)	Insertion Loss	Frequency Response	Lead Length (in)	Weight (lbs)
TLM572	70V / 25V	5W	5, 2, 1, .5, .25W	8 ohms	.5 x .5	< 0.8dB	50Hz-20kHz $\pm$ 1dB	8	.40