

CG-100 Installation Guide

(1.) Prior to installation we recommend setting a System Restore Point.

To set a restore point within Windows XP: Go to "Start">All Programs>Accessories>System Tools>System Restore
Select Create a restore point.

This will allow XP to keep a backup of your system state prior to your installation.

(2.) THE FOLLOWING DECKLINK™ CARDS CAN BE USED WITH THE CG-100 SOFTWARE:

Decklink™ (Standard Version)
Decklink™ SP
Decklink™ Pro
Decklink™ Extreme

REQUIRED DECKLINK™ DRIVERS:

*****DO NOT USE THE DRIVERS INCLUDED IN YOUR DECKLINK™ PACKAGING*****

Both driver versions have been included in the trial download and/or purchased disk.

Decklink™ (Standard Version) – Driver Version 5.4.2
Decklink™ SP – Driver Version 5.4.2
Decklink™ Pro – Driver Version 5.5.1
Decklink™ Extreme – Driver Version 5.5.1


Install the corresponding Decklink™ driver found on your CG-100 installation disk.

Once you have restarted your computer proceed to the CG-100 software installation section.

UPGRADING FROM A PREVIOUS CG-100 VERSION

1. Select the correct Decklink™ driver for your card and Double-click the driver to begin the installation.
2. Select Remove the previous Decklink™ Driver and complete the steps, including restarting your computer.
3. Once the system has rebooted, Double-click the Decklink™ driver once more to begin installing the newer driver and complete all of the steps, including restarting the computer.
4. The next step will involve updating the CG-100 software. Double-click the CG-100 installer.
5. A dialog box will appear with several choices, please select "repair". Once you complete the remaining steps, please restart your PC.

(3.) Begin the CG-100 software installation

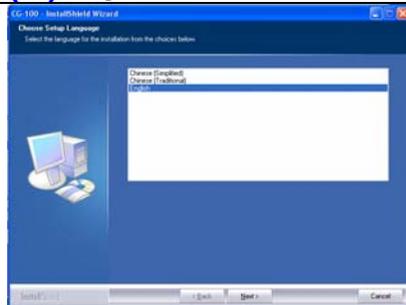

First, select the Setup Language and then click on Next



Click on Next to continue

Read through the License Agreement, to proceed click on “Yes”


The CG-100 Setup Wizard will display the minimum system requirements, click on Next to continue.


Enter your User Name and Company Name in the boxes provided. Enter the CG-100 Serial Number in the Serial Number Box and then click on Next.

(The serial number is an alpha numeric sequence xxxxx-xxxxx-xxxxx-xxxxx)

N.B. The Serial Number is found on the reverse side of the CD Case – Please see below


The Serial Number will be 4 blocks of five characters separated by hyphens.
The information must be entered exactly as it appears.
NOTE: the label will be pasted in the inside of disc's case.

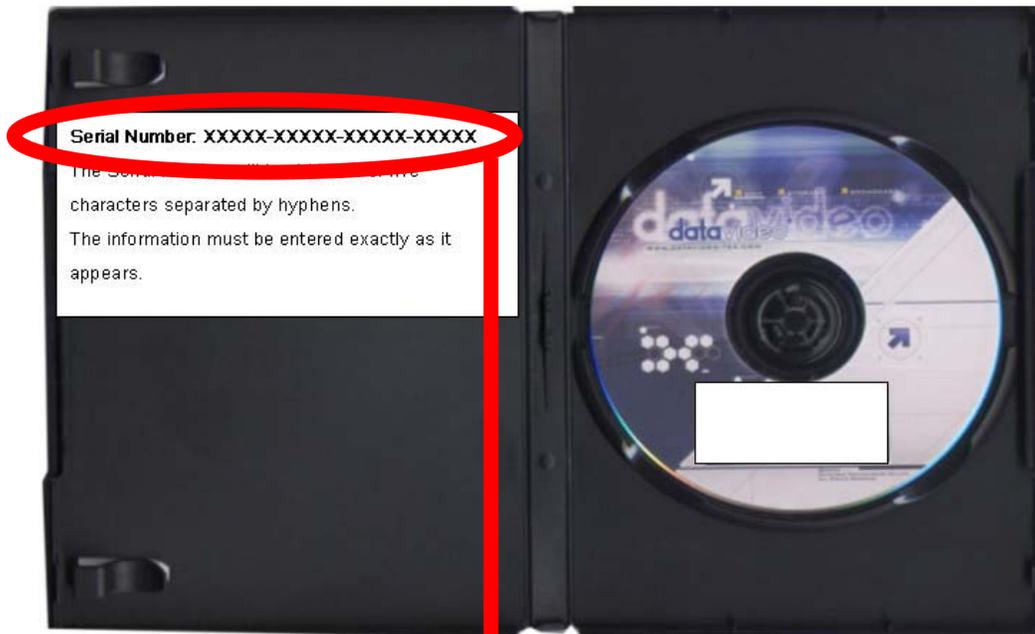A screenshot of a software installation window titled "CG-100 Setup". The window has a dark blue header and a lighter blue main area. On the left side, there is an icon of a computer monitor, a tower PC, and a CD/DVD disc. The main text reads "Customer Information" followed by "Please enter your information." Below this, a larger instruction says "Please enter your name, the name of the company for which you work and the product serial number." There are three input fields: "User Name:" with the text "jefflin", "Company Name:" with the text "datavideo", and "Serial Number:" with the text "XXXXX-XXXXX-XXXXX-XXXXX". The "Serial Number" field is circled in red. At the bottom of the window, there are three buttons: "< Back", "Next >", and "Cancel". The "InstallShield" logo is visible in the bottom left corner.

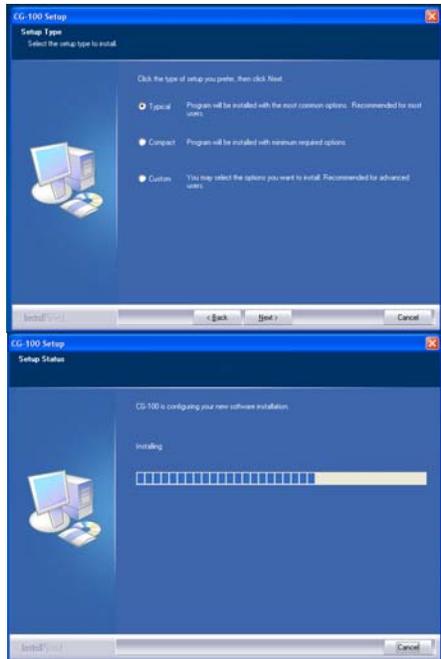

Select the type of installation you want to proceed with. Unless you have specific requirements to the contrary we would recommend a “Typical” installation.


Click on Next to continue.

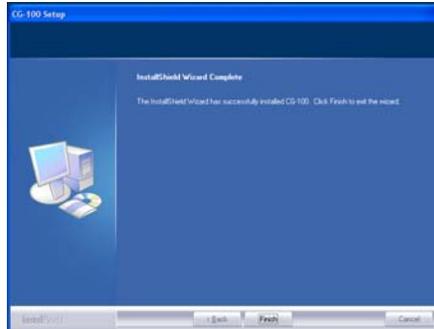

The Setup Wizard will complete the installation. Once complete click on “Finish” to close the wizard.

Launching the CG-100 Software

Once installation is complete the CG-100 Software is ready to go. A CG-100 Icon will be created on your desktop. Double-Click the Icon to launch the application.

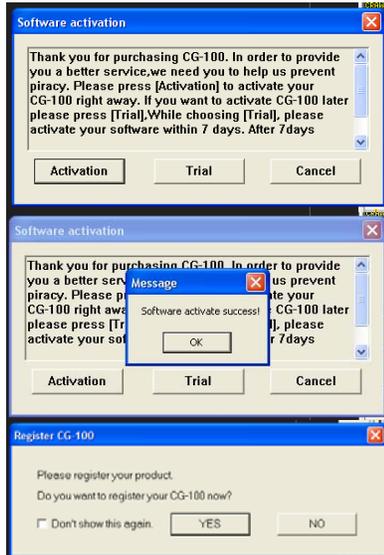

Upon first launch this message will appear. You must Activate your software within 7 days; otherwise a Datavideo CG-100 watermark will appear on the screen. To Activate your software click on Activation.

Note: You will need an internet connection to continue.

Automatic Activation will take less than a minute. Once the process is complete the “Software Activate Success” Box will appear. Click on OK to continue.

The Register CG-100 box will appear. Registration is optional; we would recommend that you do take the time to register so that we can keep you informed of future enhancements. If you wish to register click on “Yes” and follow the online information for your territory; if you do not wish to register click on “No”. To prevent the message coming up again click in the “Don’t show this again” Box, and then click on Yes or No.