# UBL PD6200/66 High Output Two-Way Mid/High Frequency Loudspeaker



precision directivity

## **Key Features:**

- ► High power 200 mm (8 in) dual-coil CMCD<sup>TM</sup> Cone Midrange Compression Driver provides high sensitivity and high continuous SPL capability along with low distortion, extended bandwidth and improved phase coherence.
- Large format neodymium HF driver provides clear, intelligible high frequency projection.
- ▶ Large PT<sup>TM</sup> Progressive Transition<sup>TM</sup> waveguides provide consistent 60° x 60° pattern control, low distortion at high SPL levels and smooth frequency response.
- Rotatable mid and high frequency waveguides allow either horizontal or vertical cabinet orientation.
- Sophisticated, steep-slope passive crossover network with switchable bi-amp/passive crossover modes.

## Applications:

- Performing arts facilities
- Live theaters
- Auditoriums
- Houses of worship
- ► Dance clubs
- Sports facilities


PD6200/66 is a Precision Directivity<sup>™</sup> 60° by 60° mid-high frequency loudspeaker designed for applications requiring high output capability with excellent pattern control.

The CMCD-82H cone midrange compression driver consists of a driver/phasing plug assembly providing high output with low distortion. CMCD-82H's extended response allows for smoother transition to the high frequency driver and the smaller entrance diameter into the waveguide provides for better pattern control. The internal 200 mm (8 inch) driver features a high power Differential Drive\* dual voice coil design. The 2432H large format high frequency compression driver utilizes a neodymium magnet and aluminum diaphragm to deliver clear and intelligible high frequency projection, extended frequency response, and low distortion at even the highest drive levels.

Large PT Progressive Transition waveguides achieve an optimum balance of extremely well controlled coverage with low distortion, smooth frequency response, and natural sound character. The waveguides are rotatable for cabinet positioning in either horizontal or vertical orientation. A high-slope crossover network minimizes band overlap and the resulting well-controlled off-axis response enhances arrayability.

The loudspeaker can be operated in either biamplified or in full passive mode. Input connectors include both Speakon<sup>®</sup> and CE-compliant covered barrier strip for hookup versatility. The cabinet is fitted with twenty M10 threaded suspension points, supporting a wide variety of installation approaches.

PD6200/66 is part of JBL's broad lineup of installed sound loudspeakers, complementing the larger PD700 mid-high cabinets with a more compact size and supplementing the smaller AE Series cabinets with higher SPL capability and larger horns for pattern control to a lower frequency.

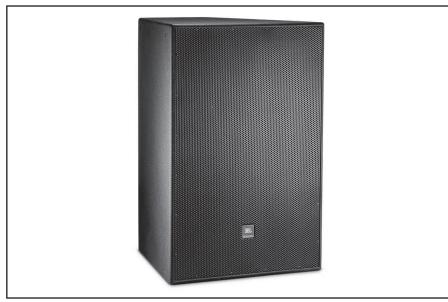

## Specifications:


-
-
gral 200 mm
m (3 in)
-
xterior grade
aded hard-
lest.
be sheltered
osure or
eas with salt
me high humidity or rapid changes in temperature. See
nsparent foam
1
strip termi-
wire or max
n barrier strip
1
atings, use
8-,
teel eyebolts.

<sup>1</sup> In bi-amp mode, with recommended active tuning


- <sup>2</sup> Resultant engineered acoustical response of crossover network and components.
- <sup>3</sup> AES standard, one decade pink noise with 6 dB crest factor within device's operational band, free air. Standard AES 2 hr rating plug long-term 100 hr rating are specified for low-frequency transducers.
- <sup>4</sup> IEC standard, full bandwidth pink noise with 6 dB crest factor, 100 hours.
- <sup>5</sup> Calculated based on power rating and sensitivity, exclusive of power compression.
- <sup>6</sup> Anechoic sensitivity in free field, no additional sensitivity gains from boundary loading.

JBL continually engages in research related to product improvement. Some materials, production methods and design refinements are introduced into existing products without notice as a routine expression of that philosophy. For this reason, any current JBL product may differ in some respect from its published description, but will always equal or exceed the original design specifications unless otherwise stated.

# ▶ PD6200/66 High Output Two-Way Mid/High Frequency Loudspeaker




Directivity Index, Q




#### Dimensions


Dimensions in mm (in)

For more detailed dimensional information, refer to Application Data Sheet












Bi-Amp FIR Frequency Response and Raw Impedance




#### Horizontal Off-Axis Frequency Response




#### Vertical Up Off-Axis Frequency Response



#### Vertical Down Off-Axis Frequency Response




Measurements obtained in bi-amp mode using FIR filters. Graphs are from unaltered measured data.










Back




#### Horizontal 1/3 Octave Polars

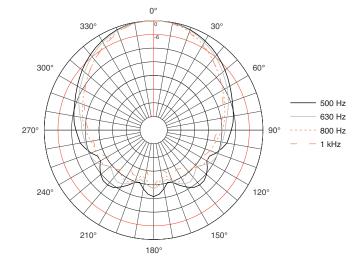



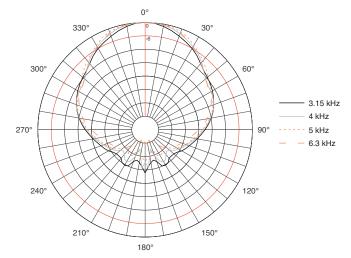


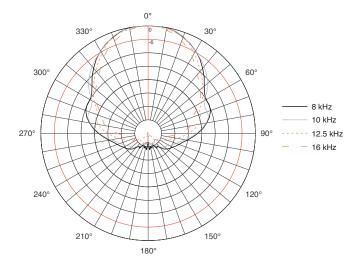


# ▶ PD6200/66 High Output Two-Way Mid/High Frequency Loudspeaker


1.6 kHz

2.5 kHz



#### Vertical 1/3 Octave Polars

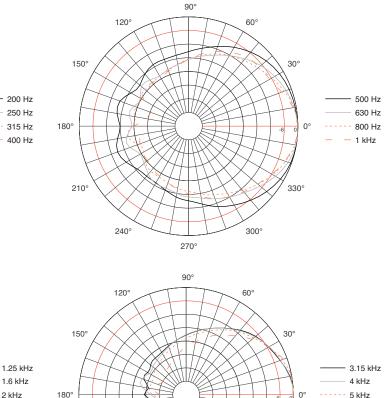




90°

60°

120°





210°

240°

JBL Professional 8500 Balboa Boulevard, P.O. Box 2200 Northridge, California 91329 U.S.A. © Copyright 2014 JBL Professional www.jblpro.com

SS PD6200/66 CRP 06/14

6.3 kHz

330°

300°

270°