

# CHG 518

## Multiple Battery Charger




This multi-unit, drop-in style charger will conveniently charge and store up to 5 Williams Sound WIR RX18 under-the-chin style receivers. This 6-hour smart charger helps keep your products organized and batteries consistently charged\*.

### CHG 518 Multiple Battery Charger:

<b>Dimensions:</b>	12"L x 6.25"W x 1.5"H (30.48 cm x 15.875 cm x 3.81 cm)
<b>Weight:</b>	1.04 lbs (.47 kg) excluding power supply
<b>Color:</b>	Black metal and plastic
<b>Power Supply Input:</b>	120 VAC
<b>Power Supply:</b>	100-240V / 12VDC TFP 043
<b>Unit Capacity:</b>	5 Units
<b>Indicators:</b>	Individual Charging Indicators: Red LEDs
<b>Warranty:</b>	1 year (90 day warranty on cables and power supply)
<b>Approvals:</b>	WEEE, RoHS
<b>Note:</b>	Charging specifications are based on Williams Sound, rechargeable NiMH battery, BAT AP11D

# Multiple Battery Charger

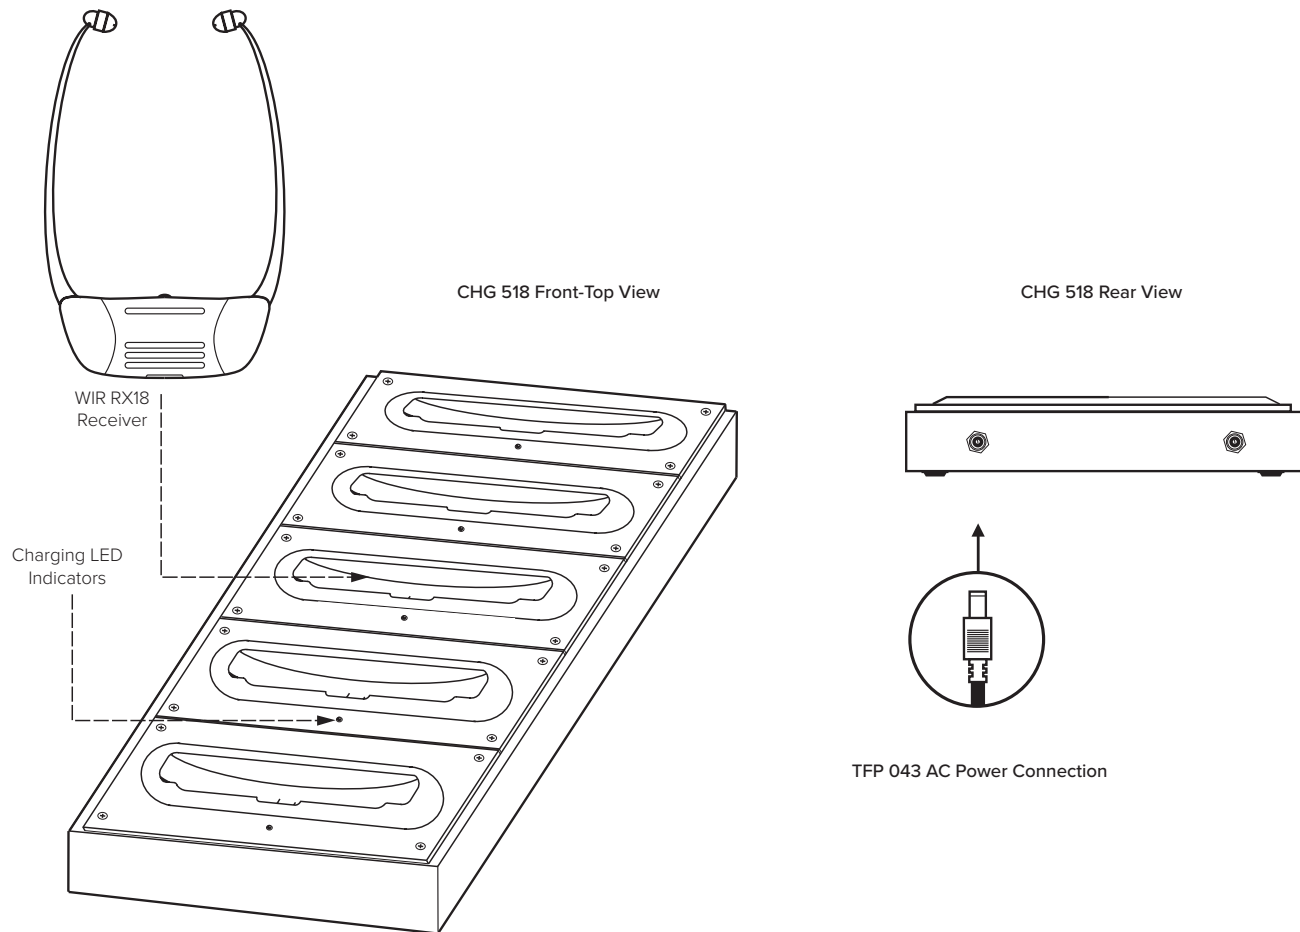

## Bid Specs:

The CHG 518 shall be a 5 unit drop-in battery charger and shall charge a maximum 5 x BAT AP07D NiMH battery packs while they are installed into the Williams Sound WIR RX18 style 3V receivers.

The charger shall be enclosed in metal and plastic measuring 12”L x 6.25”W x 1.5”H (30.48 cm x 15.875 cm x 3.81 cm). The unit shall weigh 1.04 lbs (.47 kg) without power supply, 1.6 lbs (.725 kg) shipping weight.

Each bay on the charger shall have a red LED indicating charging status. The LEDs shall be on continuously during charge and after six hours will turn green indicating battery is fully charged. The

charger will monitor the state of the batteries and will recharge them if needed when kept in the charger\*.

The charger CHG 518 shall be powered by an external power supply via a DC barrel connector. The CHG 518 shall be supplied with a piggy-back connector enabling up to three chargers to be powered by one power supply. The charger shall be RoHS compliant and be covered by a one-year parts and labor warranty (90 days on cable and power supply).

The charger shall be the Williams Sound, model CHG 518.

**\*Due to a component substitution there are two versions of the CHG 518. Serial numbers 0654 to 0853 will NOT monitor the battery state and will charge on a six hour timer. Serial numbers before and after this sequence will monitor the battery state.**

### Domestic Sales

Williams AV  
10300 Valley View Rd  
Eden Prairie, MN 55344  
Ph: 800-328-6190 / 952-943-2252  
FAX: 952-943-2174  
Email: [info@williamsav.com](mailto:info@williamsav.com)  
Web: [www.williamsav.com](http://www.williamsav.com)

### International Sales

International Sales Department  
Williams AV  
10300 Valley View Rd  
Eden Prairie, MN 55344 USA  
Phone: +1 952 943 2252  
Fax: +1 952 943 2174  
Email: [info@williamsav.com](mailto:info@williamsav.com)  
Web: [www.williamsav.com](http://www.williamsav.com)

**WILLIAMS AV**  
[info@williamsav.com](mailto:info@williamsav.com) / [www.williamsav.com](http://www.williamsav.com)  
800-843-3544 / INTL: +1-952-943-2252