MX152 MixMate

The MX152 is a compact two microphone and three stereo source mixer designed mainly for installation purposes. It's ideal for small restaurants, clubs, churches, schools, or any application where two paging or announcing microphones need to be mixed with stereo sources such as AM/FM tuners, CD players, juke boxes, and video players. Priority talkover is provided on Microphone One for paging, and on Source Three for a jukebox, telephone, etc.

FEATURES:

- Two Microphone inputs with phantom power
- Tone controls for each Mic input
- Three stereo Source inputs
- Bass and Treble controls on Sources One and Two
- · Priority ducking on Mic One and Source Three
- Switchable Mono/Stereo Unbalanced Output

SPECIFICATIONS

Input Impedance: Mic: 600 Ohms XLR balanced

Source: 22K Ohms RCA

Max Input Level: Mic: -14 dBV Mic level Max

Source: 24 dBV

Connectors: 2: XLR, 3: Stereo RCA

Phantom Power: +12 VDC Max Gain: Hic: 60 dB

Source: 26 dB

Tone Controls: +/-12 dB 100 Hz Bass


+/-12 dB 11kHz Treble

Nose Floor: - 80 dB S/N Ratio: 96 dB Priority Attenuation: 60 dB

Power: 12 VAC 600 mA (Rolls PS12)

Size: 5.5" x 1.7" x 5"

Weight: 2 lbs

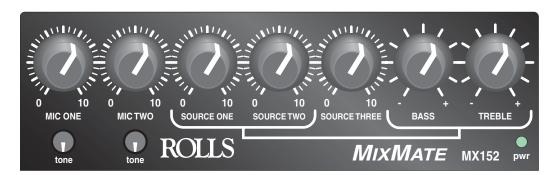

Shown actual size

