


Included Components


1. TQ8X x1
2. TQRC Remote Control x1
3. TQ8PS Power Supply x1
4. Quick Start Guide x1




Setup

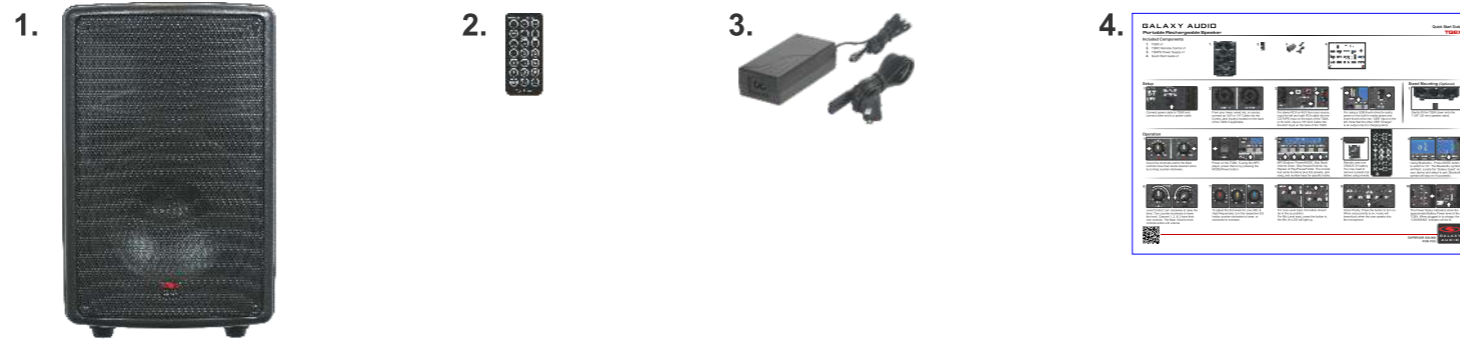


1 Connect power cable to TQ8X and connect other end to a power outlet.

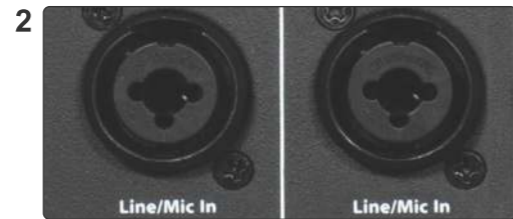

2 From your mixer, wired mic, or source, connect an XLR or 1/4" Cable into the Combo Jack Input(s) located on the back of the TQ8X if applicable.

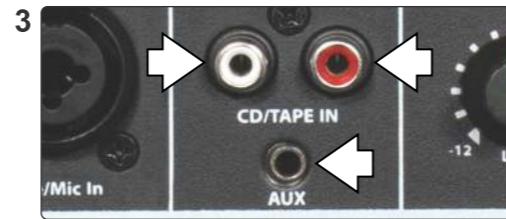

3 For stereo RCA or AUX from your source, input the left and right RCA cable into the CD/TAPE Input on the back of the TQ8X, or for AUX, input a 1/8" AUX Cable into the AUX Input on the back of the TQ8X.

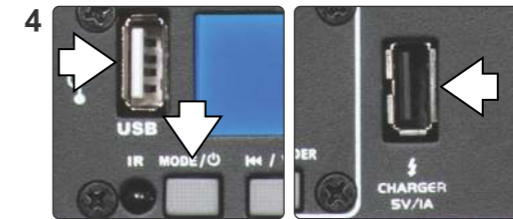

4 For using a USB thumb drive for audio, power on the built-in media player and insert thumb drive into "USB" input on the left. Note that the other USB "Charger" is an output only for charging items.

Stand Mounting (Optional)



1 Gently lift the TQ8X down onto the 1-3/8" (35 mm) speaker stand.


Operation



1 Insure the channels and/or the Main controls have their levels lowered some by turning counter-clockwise.




2 Power on the TQ8X. If using the MP3 player, power that on by pressing the MODE/Power button.

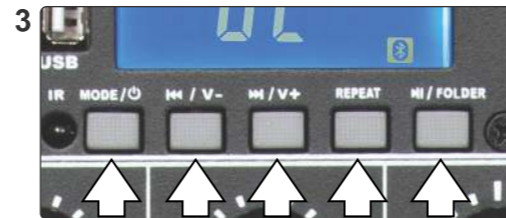


3 MP3 Buttons: Power/MODE, Skip Back/Volume Down, Skip forward/Volume Up, Repeat, & Play/Pause/Folder. The remote has same functions plus EQ presets, pick song, and number keys for specific tracks.



4 Remote uses one CR2025 3V battery. You may need to remove a plastic tab before using remote.

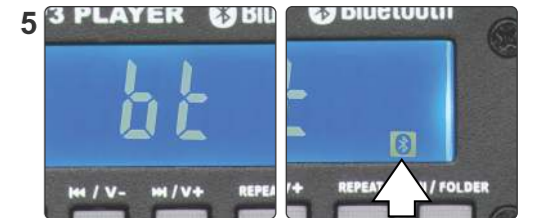


5 Using Bluetooth® - Press MODE button to switch to "bt". The Bluetooth® symbol will flash. Locate the "Galaxy Quest" on your device and select to pair. Bluetooth® symbol will stay on if successful.

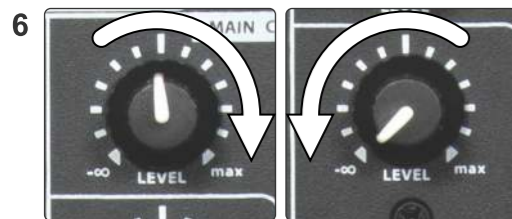

6 Level Control: turn clockwise to raise the level. Turn counter-clockwise to lower the level. Channel 1, 2, & 3 have their own controls. The Main Volume knob controls entire unit volume.



7 To adjust the EQ levels for Low, Mid, & High frequencies, turn the respective EQ knobs counter-clockwise to lower, or clockwise to increase.

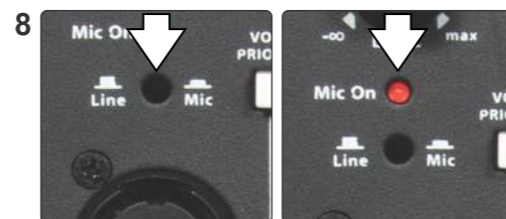

8 For Line Level input, the button should be in the up position. For Mic Level input, press the button in, the Mic On LED will light up.



9 Voice Priority: Press the button to turn on. When voice priority is on, music will lower/duck when the user speaks into the microphone.



10 The Power Status indicators show the approximate Battery Power level of the TQ8X. When plugged in to charge, the "CHARGING" indicator will be lit.



Quick Start Guide



FAQ

- 1. Q. How often should I plug the TQ8X in to charge?**
A. It is recommended to leave it plugged into AC when ever it is not in use. Always charge after each use. Do not store with battery discharged.
- 2. Q. Will the TQ8X run on AC power if the battery is dead?**
A. Yes, and it will charge the battery while in use.
- 3. Q. Can the MP3 player and CH1/CH2, mic inputs or CH3 input on my TQ8X be used at the same time?**
A. Yes, all inputs are available simultaneously and levels mixed with individual controls.



BE HEARD™

Other Helpful Sources

TQ8X
Product Page



TQ8X
Manual



(PDF Download)

TQ8X8
Cutsheet



(PDF Download)

YouTube Channel



Specifications subject to change without notice.