

## ELITE C24 ProPanels™

Fabric-Wrapped Fiberglass Panels

**Benefits:**

- In stock and ready for immediate shipment
- 2" thickness provides superior low-frequency absorption
- Class A Flame Retardancy
- Lower cost than other custom fabric alternatives
- Compliments any B24/B22 ProPanel installation
- Auralex Application Support Specialists and Engineers assistance available
- Price breaks for stock products, quantity discounts

**Size:**



- 2' wide x 4' long x 2" thick

**Edge:**

- Beveled Edge

**Box Information:**

- 3 panels per box (*minimum order = 3 panels*)
- Box size of 27.5" x 6.5" x 48.5"

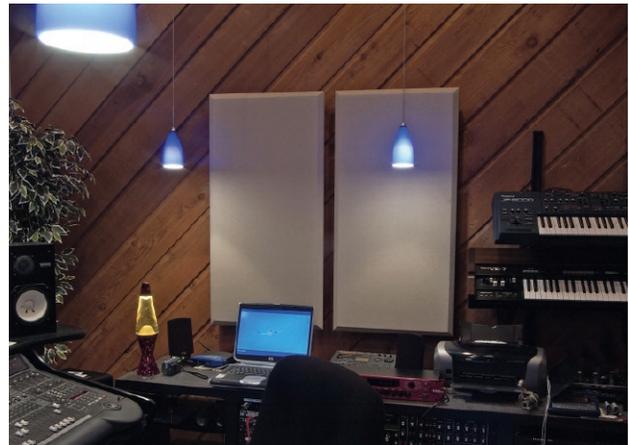

**Fabrics:**

- Spinel Sandstone
- Spinel Obsidian

**Lead time:**

- Normally in stock and ready for immediate shipment

**Installation:**

- Four impaling clips per panel (*included*)

**Accessory Products:**

- ELITE B24 ProPanels
- ELITE ProFusor

**Overall NRC:**

- 1.05

| Absorption Test Data ( <i>Absorption Coefficients</i> ): |       |       |      |      |      |
|--|-------|-------|------|------|------|
| 125Hz  | 250Hz | 500Hz | 1kHz | 2kHz | 4kHz |
| 0.42   | 0.89  | 1.12  | 1.07 | 1.10 | 1.09 |

ELITE ProPanels™